

156-915.77^{Q&As}

Check Point Certified Security Expert Update

Pass CheckPoint 156-915.77 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/156-915-77.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by CheckPoint
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.pass4itsure.com/156-915-77.html 2024 Latest pass4itsure 156-915.77 PDF and VCE dumps Download

QUESTION 1									
is the called process that starts when opening Smart View Tracker application.									
A. logtrackerd									
B. fwlogd									
C. CPLMD									
D. FWM									
Correct Answer: C									

QUESTION 2

Which of the following statements accurately describes the upgrade export command?

A. Used primarily when upgrading the Security Management Server, upgrade export stores all object databases and the conf directories for importing to a newer version of the Security Gateway.

B. Used when upgrading the Security Gateway, upgrade export includes modified files, such as in the directories /lib and /conf.

C. upgrade export is used when upgrading the Security Gateway, and allows certain files to be included or excluded before exporting.

D. upgrade export stores network-configuration data, objects, global properties, and the database revisions prior to upgrading the Security Management Server.

Correct Answer: A


QUESTION 3

You have three servers located in a DMZ, using private IP addresses. You want internal users from

10.10.10.x to access the DMZ servers by public IP addresses. Internal_net 10.10.10.x is configured for Hide NAT behind the Security Gateway\\'s external interface.

https://www.pass4itsure.com/156-915-77.html

2024 Latest pass4itsure 156-915.77 PDF and VCE dumps Download

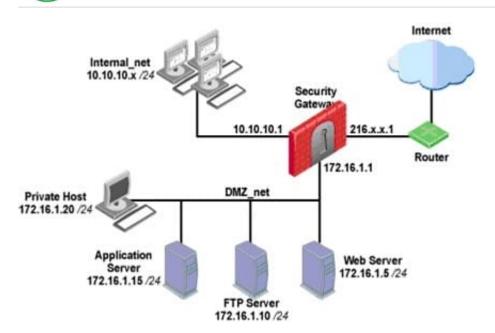

What is the best configuration for 10.10.10.x users to access the DMZ servers, using the DMZ servers\\' public IP addresses?

A. When connecting to internal network 10.10.10.x, configure Hide NAT for the DMZ network behind the Security Gateway DMZ interface.

- B. When the source is the internal network 10.10.10.x, configure manual static NAT rules to translate the DMZ servers.
- C. When connecting to the Internet, configure manual Static NAT rules to translate the DMZ servers.
- D. When trying to access DMZ servers, configure Hide NAT for 10.10.10.x behind the DMZ\\'s interface.

Correct Answer: B

QUESTION 4

Review the Rule Base displayed.

NO.	NAME	SOURCE	DESTINATION	VPN	SERVICE	ACTION	TRACK	INSTALL ON	TIME
1	Steath Rule	* Any	Corporate-gw	* Any Traffic	* Any	(e) drop	■ Log	* Policy Tars	* Any
2	Local uses using AOL	4 Corporate-internal-ne	* Any	* Any Traffic	TOP AOL	⊕ accept	■ Log	* Policy Tars	* Any
3	Customers Accessing Web Server	Customers@Any	Corporate-web-:	* Any Traffic	TOP http	Client Auth	■ Log	* Policy Tars	* Any
4	Incoming Emails	* Any	Corporate-mail-s	* Any Traffic	STEP smtp->MailFilter	accept	■ Log	* Policy Targ	* Any
5	HTTP/FTP access	+ Corporate-Internal-ne	* Any	* Any Traffic	TCP http TCP ftp	accept	■ Log	* Policy Targ	* Any
6	Cleanup Rule	* Any	* Any	* Any Traffic	* Any	(ii) drop	■ Log	* Policy Tars	* Any

For which rules will the connection templates be generated in SecureXL?

- A. Rules 2 and 5
- B. Rules 2 through 5

https://www.pass4itsure.com/156-915-77.html

2024 Latest pass4itsure 156-915.77 PDF and VCE dumps Download

- C. Rule 2 only
- D. All rules except Rule 3

Correct Answer: D

QUESTION 5

When using GAiA, it might be necessary to temporarily change the MAC address of the interface eth 0 to 00:0C:29:12:34:56. After restarting the network the old MAC address should be active. How do you configure this change?

A. As expert user, issue these commands:

```
# IP link set ethO down
# IP link set ethO addr 00:0C:29:12:34:56
# IP link set ethO up
```

B. Edit the file /etc/sysconfig/netconf.C and put the new MAC address in the field

```
(conf
:(conns
:(conn
:hwaddr ("00:0C:29:12:34:56")
```

C. As expert user, issue the command:

IP link set eth0 addr 00:0C:29:12:34:56

- D. Open the WebUl, select Network > Connections > eth0. Place the new MAC address in the field Physical Address, and press Apply to save the settings.
- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: A

156-915.77 PDF Dumps

<u>156-915.77 VCE Dumps</u>

156-915.77 Practice Test