



1Y0-A21^{Q&As}

Basic Administration for Citrix NetScaler 9.2

Pass Citrix 1Y0-A21 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/1y0-a21.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Citrix
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Scenario: A network administrator needs to configure routing on a NetScaler appliance. The NetScaler is in a DMZ whose gateway is 10.54.80.1/24. There are no configured routes on the NetScaler.


Given this topology, which is the appropriate routing configuration for the NetScaler?

- A. set default route 10.54.80.1
- B. add route 0.0.0.0 0.0.0.0 10.54.80.1
- C. set default route 0.0.0.0 0.0.0.0 10.54.80.1
- D. add route 0.0.0.0 255.255.255.255 10.54.80.1

Correct Answer: B

QUESTION 2

Scenario: An administrator is working within a network environment as depicted in the attached exhibit. The NetScaler systems in this HA pair need to exchange heartbeat packets over L3 through routers R3 and R4.

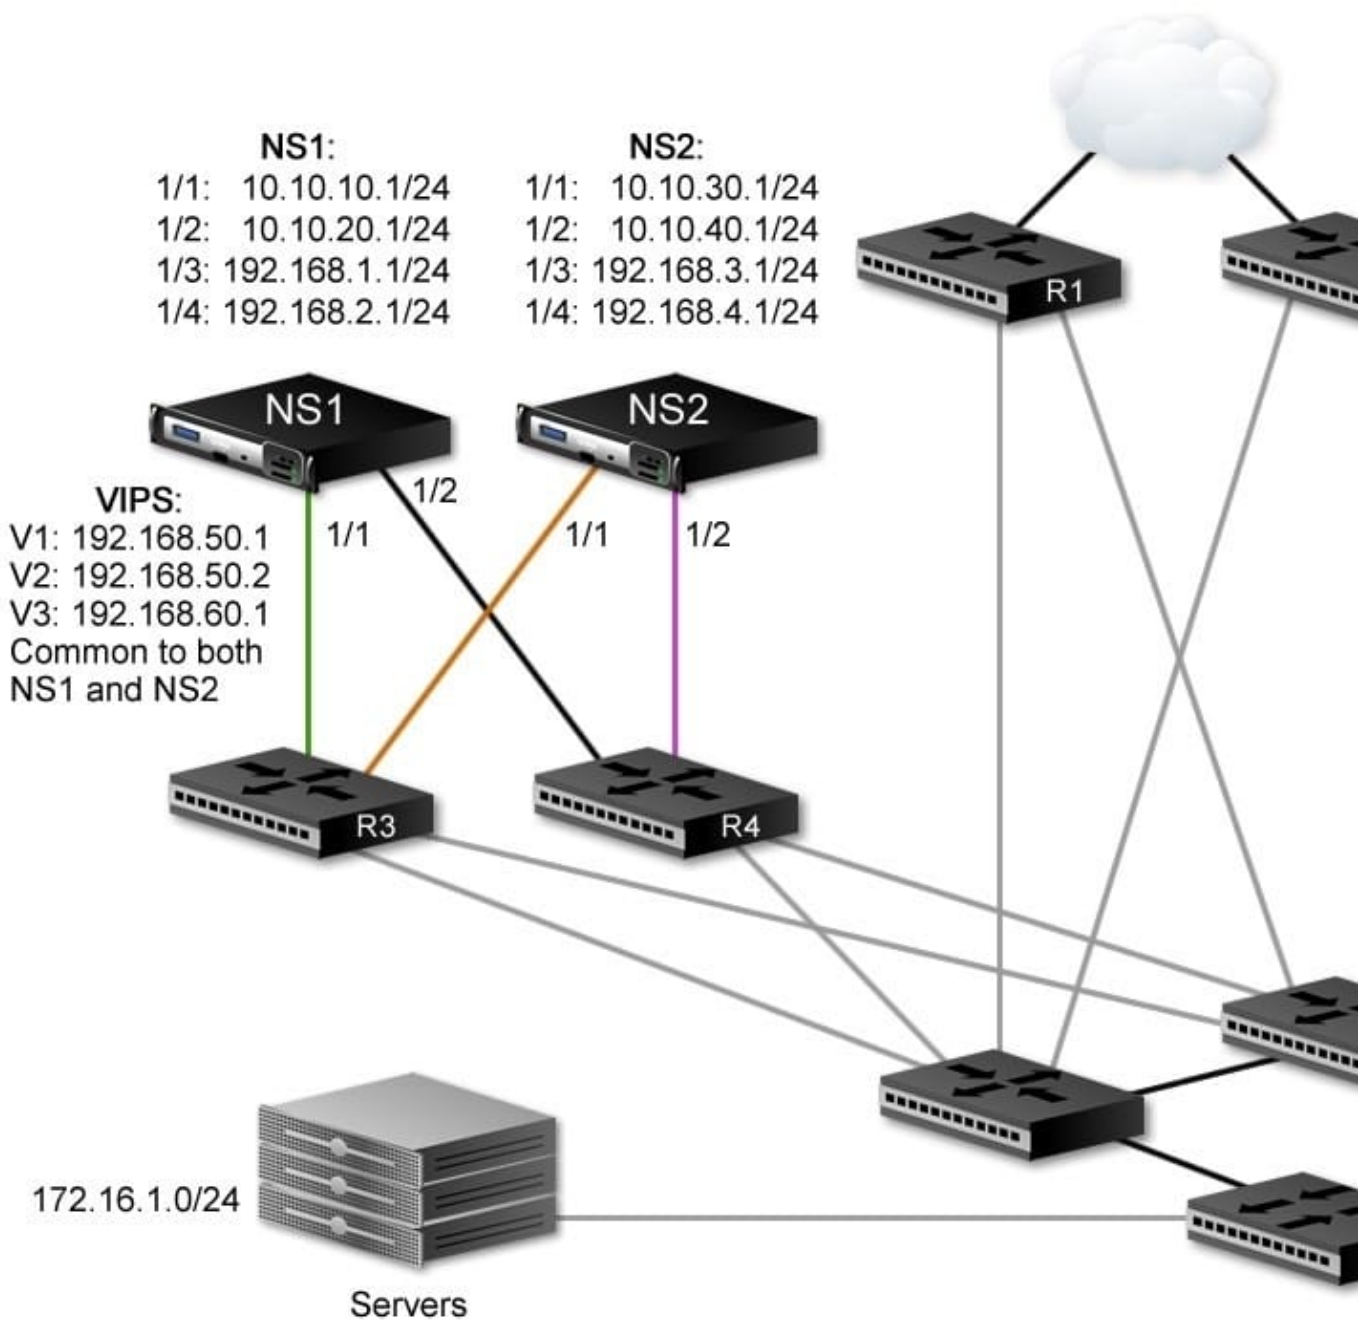

How can the administrator achieve this HA functionality?

- A. Enable the dynamic routing feature.
- B. Configure Route Health Injection (RHI).
- C. Bind a route monitor to each NetScaler device.
- D. Enable Independent Network Configuration (INC).

Correct Answer: D



QUESTION 3

Which parameter on a monitor specifies the consecutive number of successful probes required to mark a service as UP?

- A. Retries
- B. Failure Retries
- C. Success Retries
- D. Response timeout
- E. Response timeout threshold

Correct Answer: C

QUESTION 4

What can an administrator configure to perform a health check for a SVC1, which is transferring HTTPS traffic so that a probe is only sent when there is no traffic to the server?

- A. An HTTP monitor with the secure parameter selected
- B. An HTTP monitor with the transparent parameter selected
- C. An HTTP-Inline monitor with the secure parameter selected
- D. An HTTP-ECV monitor with the transparent parameter selected

Correct Answer: C

QUESTION 5

When setting up a NetScaler system, an administrator can use the _____ to set the nsroot password. (Choose the correct option to complete the sentence.)

- A. Setup Wizard
- B. entity template
- C. SSL VPN Wizard
- D. passwd command
- E. set nsroot user command

Correct Answer: A