



300-430^{Q&As}

Implementing Cisco Enterprise Wireless Networks (ENWLSI)

Pass Cisco 300-430 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/300-430.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

An engineer is troubleshooting a Cisco CMX high-availability deployment and notices that the primary and backup Cisco CMX servers are both considered primary. Which command must the engineer run on the backup server?

- A. cmxha convert backup
- B. cmxha backup convert
- C. cmxha secondary convert
- D. cmxha convert secondary

Correct Answer: C

cmxha secondary{ convert | info }

https://www.cisco.com/c/en/us/td/docs/wireless/mse/10-3/cmx_command/cmxcli103.pdf

QUESTION 2


An engineer is implementing RADIUS to restrict administrative control to the network with the WLC management IP address of 192.168.1.10 and an AP subnet of 192.168.2.0/24. Which entry does the engineer define in the RADIUS server?

- A. administrative access defined on the WLC and the network range 192.168.2.0/255.255.254.0
- B. NAS entry of the virtual interface and the network range 192.168.2.0/255.255.255.0
- C. shared secret defined on the WLC and the network range 192.168.1.0/255.255.254.0
- D. WLC roles for commands and the network range 192.168.1.0/255.255.255.0

Correct Answer: A

QUESTION 3

Refer to the exhibit.

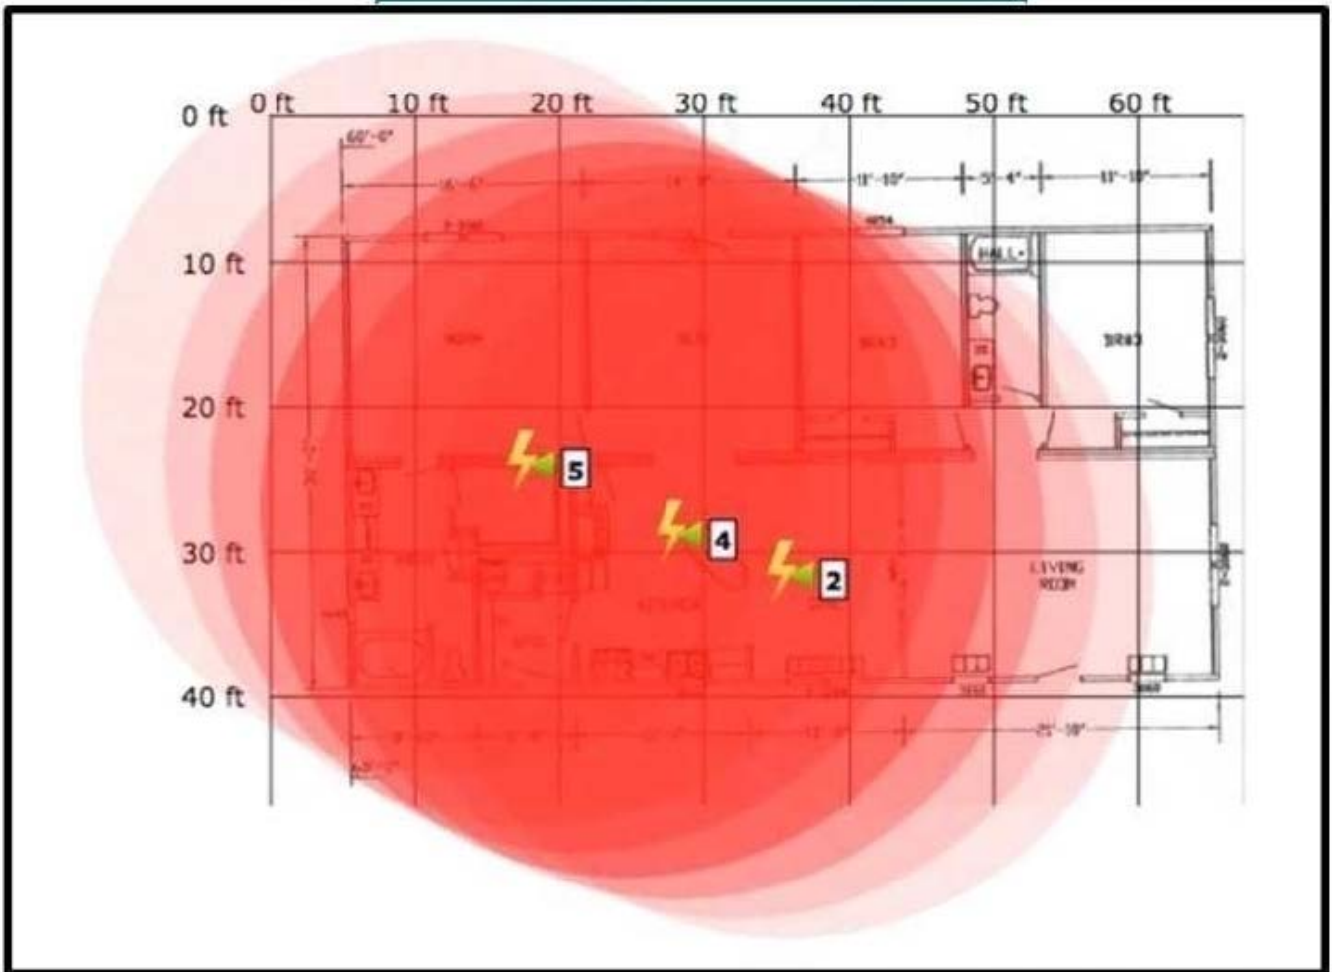

An engineer needs to manage non-802.11 interference. What is observed in the output on PI?

- A. Several light interferers are collectively impacting connectivity at this site.
- B. The three Individual clusters shown Indicate poor AP placement.
- C. At least one strong interferer is impacting connectivity at this site.
- D. RF at this site is unable to provide adequate wireless performance.

Correct Answer: B

QUESTION 4

The CTO of an organization wants to ensure that all Android devices are placed into a separate VLAN on their wireless network. However, the CTO does not want to deploy ISE. Which feature must be implemented on the Cisco WLC?

- A. RADIUS server overwrite interface
- B. AAA override
- C. WLAN local policy



D. custom AVC profile

Correct Answer: C

<https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/7-5/NativeProfiling75.html>

QUESTION 5

An engineer must configure Cisco OEAPs for three executives. As soon as the NAT address is configured on the management interface, it is noticed that the WLC is not responding for APs that are trying to associate to the internal IP management address.

Which command should be used to reconcile this?

- A. config flexconnect office-extend nat-ip-only disable
- B. config network ap-discovery nap-ip-only enable
- C. config flexconnect office-extend nat-ip-only enable
- D. config network ap-discovery nat-ip-only disable

Correct Answer: D

<https://community.cisco.com/t5/wireless/office-extend-ap-and-external-addresses/td-p/3742395>

[Latest 300-430 Dumps](#)

[300-430 PDF Dumps](#)

[300-430 Brindumps](#)