



300-620^{Q&As}

Implementing Cisco Application Centric Infrastructure (DCACI)

Pass Cisco 300-620 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/300-620.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit.

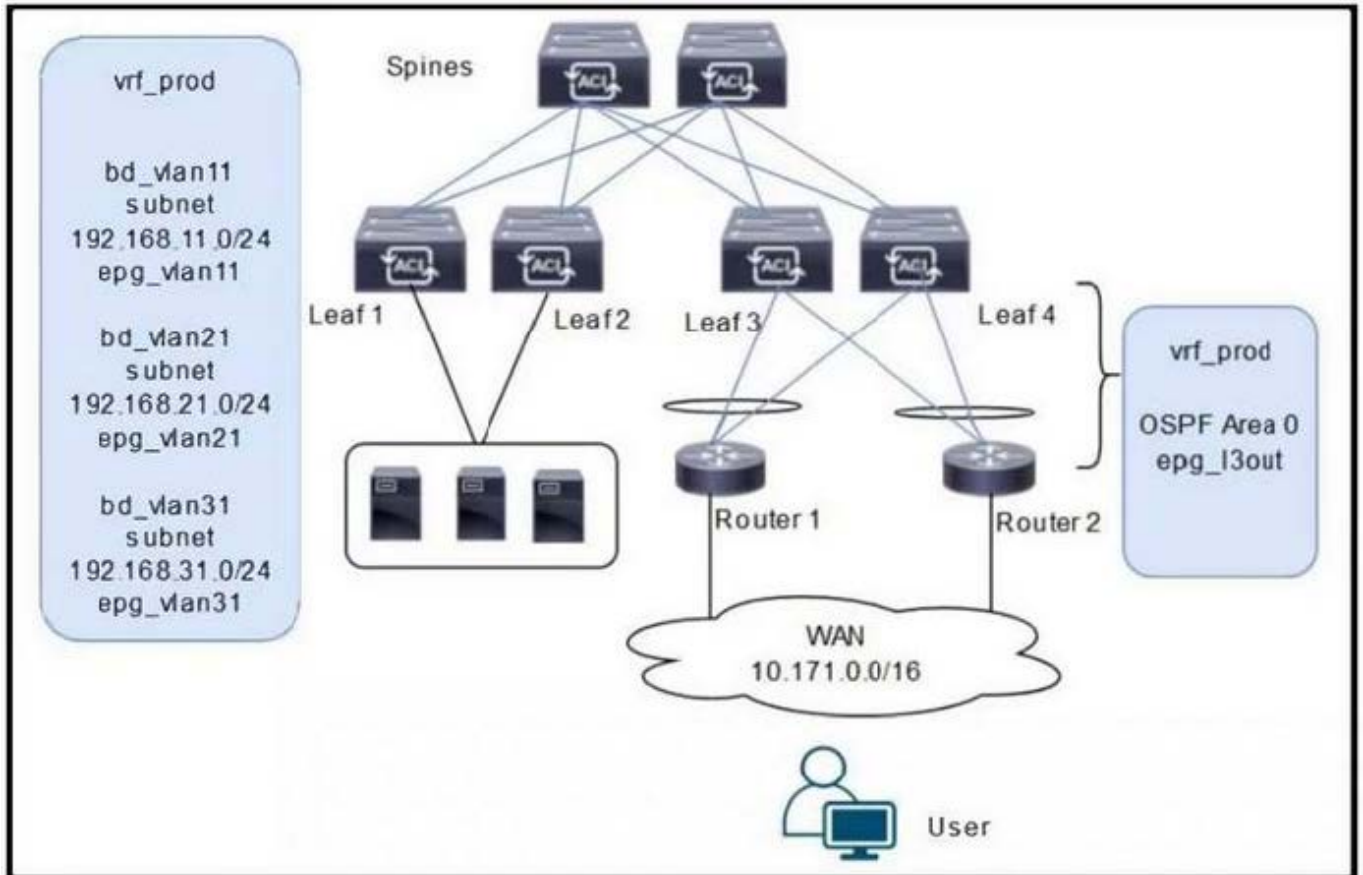

A customer is deploying a WAN with these requirements:

1.

Routers 1 and 2 must receive only routes 192.168.11.0/24 and 192.168.21.0/24 from the Cisco ACI fabric.

2.

Reachability to the WAN users must be permitted only for the servers that are located in vrf_prod.

Which settings must be configured to meet these objectives?

- A. Configure the subnets 192.168.11.0/24 and 192.168.21.0/24 as Private to VRF. Configure the subnet 192.168.31.0/24 as Advertised Externally. Configure an EPG subnet 0.0.0.0/0 as Shared Route Control Subnet.
- B. Configure the subnets 192.168.11.0/24 and 192.168.21.0/24 as Private to VRF. Configure the subnet 192.168.31.0/24 as Advertised Externally. Configure an EPG subnet 0.0.0.0/0 as External Subnets for External EPG.
- C. Configure the subnets 192.168.11.0/24 and 192.168.21.0/24 as Advertised Externally. Configure the subnet 192.168.31.0/24 as Private to VRF. Configure an EPG subnet 0.0.0.0/0 as External Subnets for External EPG.
- D. Configure the subnets 192.168.11.0/24 and 192.168.21.0/24 as Advertised Externally. Configure the subnet



192.168.31.0/24 as Private to VRF. Configure an EPG subnet 0.0.0.0/0 as Shared Route Control Subnet.

Correct Answer: C

QUESTION 2

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB E. HTTPS

Correct Answer: BC

QUESTION 3

DRAG DROP

Drag and drop the Cisco ACI Layer 4 to Layer 7 service insertion terms on the left to the correct descriptions on the right.

Select and Place:



concrete interfaces

service graph

device cluster

VRF stitching

ensures reachability between L3 domains

rendered with local resources that are available in the fabric

contains an active-standby pair of firewalls or load balancers

encapsulations programmed based on their association with
logical interfaces

Correct Answer:



VRF stitching

service graph

device cluster

concrete interfaces

QUESTION 4

A network engineer demonstrates Cisco ACI to a customer. One of the test cases is to validate a disaster recovery event by resetting the ACI fabric to factory and then restoring the fabric to the state it was in before the event. Which setting must be enabled on ACI to export all configuration parameters that are necessary to meet these requirements?

- A. enabled AES encryption
- B. generated a tech-support file
- C. encrypted export destination
- D. enabled JSON format export

Correct Answer: A

AES encryption may be optional for backup but is required for the use case of restoring a factory-fresh install to a fully working environment.



QUESTION 5

A Cisco ACI fabric must send a packet between two pods in a Cisco ACI Multi-Pod topology where ARP flooding is disabled within the bridge domain. How does a Cisco ACI spine switch forward ARP messages from a leaf switch in POD1 to POD2?

- A. ARP optimization is applied and sends ARP to remote anycast.
- B. The ARP message is dropped and connectivity is lost between the endpoints.
- C. A proxy ARP message is sent to destination group 225.224.0.0.
- D. An ARP Glean message is sent to multicast address 239.255.255.240.

Correct Answer: D

[300-620 PDF Dumps](#)

[300-620 Practice Test](#)

[300-620 Study Guide](#)