



301A^{Q&As}

BIG-IP LTM Specialist: Architect, Set up, Deploy

Pass F5 301A Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/301a.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by F5 Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

An application requires load balancing functionality. The application must be encrypted to the client. Certain content must be manipulated by the following IRule: Which set of profiles must be applied to the virtual server?

```
when HTTP_REQUEST {
  set replace_content 0
  if ([HTTP::uri] contains "/atoz/") {
    set replace_content 1
  }
}

when HTTP_RESPONSE {
  if ([replace_content equals "1"]) {
    # Disable the stream filter by default
    STREAM::disable
    # Check if response type is text
    if ([HTTP::header value Content-Type] contains "text" and [HTTP::header "User-Agent"]
    contains "****") {
      # Replace
      STREAM::expression "01234xyz0 04560xyz0"
      # Enable the stream filter for this response only
      STREAM::enable
    }
  }
}
```

- A. TCP, HTTP server SSL Stream
- B. TCP, HTTP, Client SSL, Stream
- C. TCP, HTTP, OnceConnect, Stream
- D. Fast L4, HTTP server SSL Stream

Correct Answer: B

Client encryption is required , clientssl, irule contains HTTP events and stream execution, http profile stream profile.

QUESTION 2

What should an LTM Specialist configure on an LTM device to send AVR notification emails?

- A. Email notification to be sent via iControl from the LTM device



- B. Syslog on the LTM device to send to an SMTP server
- C. Custom SNMP traps on the LTM device for AVR notifications
- D. Email notification to be sent via SMTP from the LTM device

Correct Answer: D

QUESTION 3

Which process can be eliminated by terminating SSL communication on the LTM device rather than the backend pool members?

- A. generating CSRS
- B. obtaining SSL certificates from a certificate authority
- C. administering SSL on the web servers
- D. applying security patches on the backend pool members

Correct Answer: C

QUESTION 4


A design requires the LTM device to become HA standby when the one of the two physical interface on the External trunk is down the External trunk is an interface on the External VLAN Which TMOS command enables this behavior?

- A. tmsh modify net van External failsafe enabled
- B. tmsh create sys ha-group External trunks add Externally
- C. tmsh create sys ha-group External trunks add External threshold 2 weight 101)
- D. tmsh create sys ha-group External trunks add (External(attribute percent up-members 100))

Correct Answer: C

QUESTION 5

Exhibit.

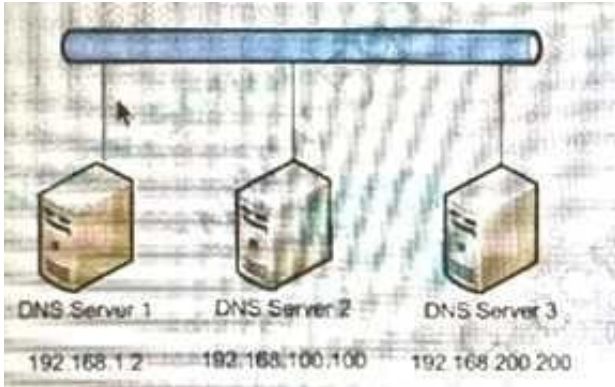

The server team has recently configured the three new DNS servers shown for the data center. No current DNS servers are currently configured on the LTM device. Which command should be used to configure the LTM device to use the new DNS servers?

- A. `tmsh create/sysdns name-servers add {192.168.1.2.192.168.100.100.192.168.200.200}`
- B. `tmsh change /sysdns name-servers add {192.168.1.2.192.168.100.100.192.168.200.200}`
- C. `tmsh modify/sysdns name-servers add {192.168.1.2.192.168.100.100.192.168.200.200}`
- D. `tmsh set/sysdns name-servers add {192.168.2.192.168.100.100.192.168.200.200}`

Correct Answer: C

Modify the configuration with `modify`, and create the configuration with `create`. Excluding B and D, and the question is to modify the DNS pointer of E5 itself the need to use is `modify`.

[301A Practice Test](#)

[301A Exam Questions](#)

[301A Braindumps](#)