



350-050^{Q&As}

CCIE Wireless Written

Pass Cisco 350-050 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/350-050.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

In the Cisco Unified Wireless Network (CUWN) model, which of the following mappings is correct at the AP level?

- A. The AP maps IP DSCP 46 (EF) to IEEE 802.11e UP CoS 6.
- B. The AP maps IP DSCP 46 (EF) to IEEE 802.11e UP CoS 5.
- C. The AP maps IEEE 802.11e UP CoS 6 to 802.1p UP CoS 5.
- D. The AP maps IEEE 802.11e UP CoS 5 to 802.1p UP CoS 6.

Correct Answer: A

QUESTION 2

You are developing a context-aware application with customized middleware. The Cisco MSE is configured to send northbound notifications to the middleware as well as to the Cisco WCS via SOAP/XML. You created the notification definitions via the WCS and see notifications coming in on the middleware, but you do not see notification messages showing up in the WCS.

What could be causing this problem?

- A. The notification receiver is not correctly configured in the WCS. Make sure the WCS is correctly configured with a northbound notification receiver using SNMPv2 and the correct community string.
- B. The notification group does not have an MSE assigned and the MSE is not synchronized.
- C. The WCS does not understand SOAP/XML. To correct this, change the transport protocol to SNMP/plain text.
- D. The WCS does not understand SOAP/XML. To correct this, change the transport protocol to SNMP/XML.
- E. The WCS does not understand SOAP/XML. To correct this, change the transport protocol to Syslog/plain text.
- F. The WCS does not understand SOAP/XML. To correct this, change the transport protocol to Syslog/XML.

Correct Answer: D

QUESTION 3

You are designing a wireless infrastructure for an enterprise customer in the busy international banking district of Tokyo. All the client adapters are fairly modern, so you have turned off 802.11b speeds to reduce the size of your cells. Which channels will you choose to make optimum use of the available spectrum?

- A. 1, 5, 9, 13
- B. 1, 6, 11
- C. 1, 6, 11, 14
- D. 1, 4, 7, 11, 14



E. 1, 5, 9

Correct Answer: B

QUESTION 4

Refer to the exhibit.

Access Control Lists > Edit

General

Access List Name: VoiceACL

Deny Counters: 0

Seq	Action	Source IP/Mask	Destination IP/Mask	Protocol	Source Port	Dest Port	DSCP	Direction	Number of Hits
1	Deny	192.168.1.0 / 255.255.255.0	0.0.0.0 / 0.0.0.0	ICMP	Any	Any	Any	Any	0
2	Deny	192.168.1.0 / 255.255.255.0	0.0.0.0 / 0.0.0.0	UDP	Any	DNS	Any	Inbound	0
3	Deny	0.0.0.0 / 0.0.0.0	192.168.1.0 / 255.255.255.0	UDP	DNS	Any	Any	Outbound	0
4	Permit	0.0.0.0 / 0.0.0.0	0.0.0.0 / 0.0.0.0	Any	Any	Any	Any	Any	0

The wireless clients at your company are all on the 192.168.1.0/24 network. Given the applied ACL in the exhibit, which two statements are true? (Choose two.)

- A. DNS requests from the wireless clients will be blocked.
- B. ICMP requests will be allowed to travel to the wireless clients.
- C. ICMP replies will be allowed to travel from the wireless clients.
- D. DNS requests from the wireless clients will be allowed.

Correct Answer: AB

QUESTION 5

Select and Place:



Map the WLC interfaces on the left to their correct functionality description in the right column.

management interface	This interface is not available on all Cisco WLCs.
AP-manager interface	Within a mobility group, the same IP address must be used for this interface in order for intercontroller roaming to work without losing connectivity.
virtual interface	If the service port is in use, this interface must be on a different subnet than the service-port interface.
service port interface	Cisco recommends using tagged VLANs for these types of interfaces.
dynamic interface	This interface is used for all Layer 3 communications between the controller and lightweight access points after the access points have joined the controller.

Correct Answer:

Map the WLC interfaces on the left to their correct functionality description in the right column.

	service port interface
	virtual interface
	management interface
	dynamic interface
	AP-manager interface

[350-050 VCE Dumps](#)

[350-050 Study Guide](#)

[350-050 Braindumps](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.pass4itsure.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

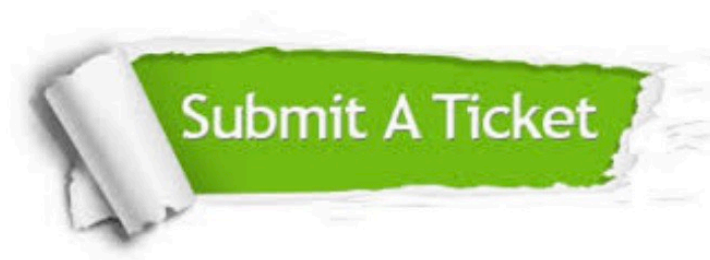

 One Year Free Update <p>Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 Money Back Guarantee <p>To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 Security & Privacy <p>We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4itsure, All Rights Reserved.