



350-501^{Q&As}

Implementing and Operating Cisco Service Provider Network Core Technologies (SPCOR)

Pass Cisco 350-501 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/350-501.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**


What occurs when a high bandwidth multicast stream is sent over an MVPN using Cisco hardware?

- A. The traffic uses the default MDT to transmit the data only if it is a (S, G) multicast route entry.
- B. A data MDT is created to if it is a (*, G) multicast route entries.
- C. A data and default MDT are created to flood the multicast stream out of all PIM-SM neighbors.
- D. A data MDT is created to allow for the best transmission through the core for (S, G) multicast route entries.

Correct Answer: B

QUESTION 2

Refer to me exhibit.

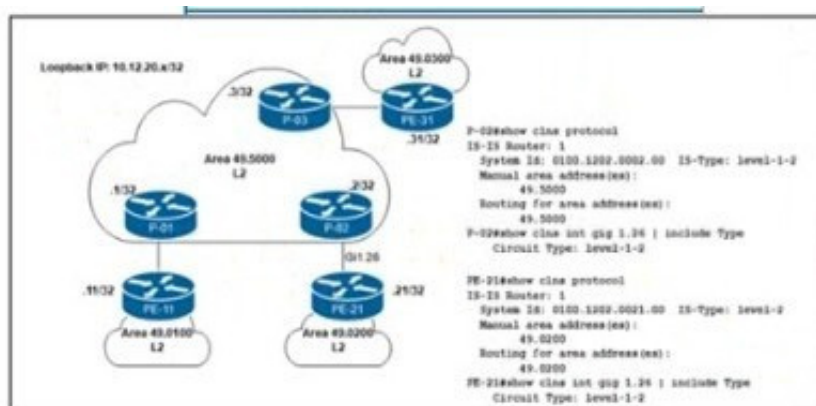

A network engineer notices PE-21 convergence degradation due to the growing LSDB size of Level 2 areas in the network. The engineer decides to migrate router PE-21 from an inter-area design to an intra-area implementation, inter-area routing must be accomplished via an ATT-bit set by the Level 1/Level 2 router. Which configuration must the engineer implement on PE-21 to complete the migrate?

- A. configure terminalrouter isis 1 no net 49.0200 net 49.5000 is-type level-1-2end
- B. configure terminalrouter isis 1 net 49.5000.0100.1202.0021.00 is-type level-1-2end
- C. configure terminalrouter isis 1 net 49.5000.0100.1222.0022.00 is-type level-1end
- D. configure terminalrouter isis 1 no net 49.0200.0100.1202.0021.00 net 49.5000.0100.1202.0021.00 is-type level-1end

Correct Answer: D



QUESTION 3

Which configuration mode do you use to apply the mpls ldp graceful-restart command in IOS XE Software? MPLS

- A. MPLS
- B. LDP neighbor
- C. global
- D. interface

Correct Answer: C

QUESTION 4

Which MPLS design attribute can you use to provide Internet access to a major customer through a separate dedicated VPN?

- A. The Internet gateway router is connected as a PE router to the MPLS backbone.
- B. The CE router supports VRF-Lite and the full BGP routing table.
- C. The Internet gateway inserts the full Internet BGP routing table into the Internet access VPN.
- D. The customer that needs the Internet access service is assigned to the same RTs as the Internet gateway.

Correct Answer: D

QUESTION 5

Refer to the exhibit.

