



# 3V0-41.19<sup>Q&As</sup>

Advanced Design NSX-T Data Center 2.4

**Pass VMware 3V0-41.19 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/3v0-41-19.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by VMware  
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Refer to Exhibit:

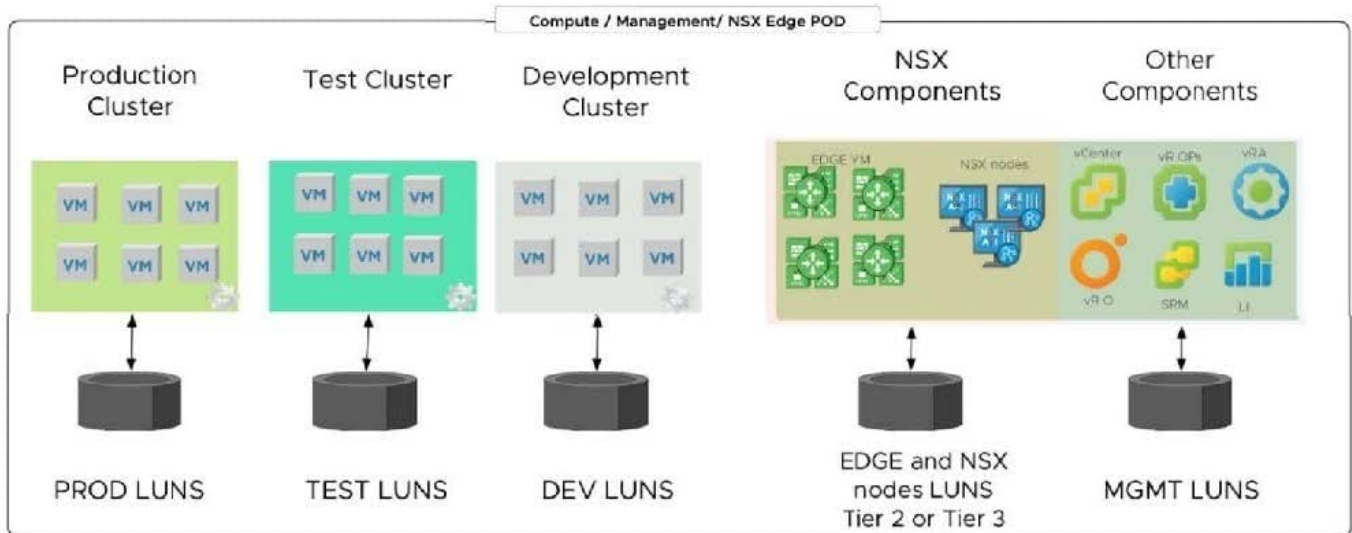

An NSX-T architect has been asked to review and recommend improvements for an NSX-T Data Center Logical Design, as shown in the drawing. The design must allow workload bursts for tenants to and from the public cloud and accommodate 30% yearly growth.

What two VMware recommended changes will Improve the Logical design? (Choose two.)

- A. A separate POD is required for the NSX Edge nodes since the amount of traffic will be heavy.
- B. An additional POD will be required to pivot workloads to Public Cloud.
- C. Automation tools will be required to reduce time for workloads to be vMotioned.
- D. Load balancers should be added to the design to support bursts from the Public Cloud.
- E. NSX-T Datacenter components needs to be placed on the Public Cloud for cost reduction.

Correct Answer: CD

You aren't placing NSX-T components in the cloud so (E) is wrong. It talks about bursting "to and from" the cloud, which lends itself to possibly being a VMware HCX (automation tools) play for (C) (A) With a whole separate "POD" (covering everything in the graphic) based on this logical design would be overkilled for the NSX Edges (B) no additional pods are required for pivoting/moving workloads to the public cloud

### QUESTION 2

An architect is helping an organization with the Physical Design of an NSX-T Data Center solution.

1.

This information was gathered during a workshop:



2.

Some workloads should be moved to a Cloud Provider.

3.

Extend network's VLAN or VNI across sites on the same broadcast domain.

4.

Enable VM mobility use cases such as migration and disaster recovery without IP address changes.

5.

Support 1500 byte MTU between sites.

Which should the architect include in their design?

A. SSL VPN

B. Reflexive NAT

C. L2 VPN

D. Load Balancer

Correct Answer: C

NSX-T doesn't support sslvpn, reflexive NAT and LB don't solve the ask. L2VPN will stretch across sites and to Cloud Providers.

---

### QUESTION 3

Which is associated with the Discover Task of the Engagement Lifecycle?

A. Create and document the logical and virtual design.

B. Gather and document requirements, assumptions and constraints.

C. Build, deploy, implement and test the design.

D. Measure performance against customer's requirements.

Correct Answer: B

Discovery is part of the initial conceptual design (RRCA)

---

### QUESTION 4

An architect is helping an organization redesign a previously installed NSX-T Data Center solution. This information was gathered during the Assessment Phase:

1.



The company's headquarters is located in Eastern Europe and there are several regional offices.

2.

The company owns several smaller companies around the globe.

3.

All locations must access the RESTful API of NSX-T through the internal network for automating the creation of segments.

4.

The company's HQ does not have any internal Public Key Infrastructure.

5.

NSX-T has already been installed at the company's headquarters.

The architect has determined self-signed certificates should be replaced with certificates signed by a Public Key Infrastructure.

Which should the architect recommend in their design?

- A. Replace the certificate on all three NSX Managers with a certificate that is signed by a third-party Public Key Infrastructure.
- B. Replace the NSX-T root certificate with an internal Certificate Authority.
- C. Replace the NSX Managers certificate with a certificate that is signed by Company Public Key Infrastructure.
- D. Replace vCenter root certificate with a certificate signed by a third-party Certificate Authority.

Correct Answer: A

NSX Mgrs are what are used for REST api calls, the company doesn't have an internal PKI solution, and replacing vCenter root cert doesn't matter to these requirements.

---

## QUESTION 5

Which three IPv6 features are supported in an NSX-T Data Center design? (Choose three.)

- A. IPv6 Distributed Firewall
- B. IPv6 OSPF
- C. IPv6 switch security
- D. IPv6 static routing
- E. IPv6 DNS
- F. IPv6 VXLAN



VCE & PDF

Pass4itSure.com

<https://www.pass4itsure.com/3v0-41-19.html>

2024 Latest pass4itsure 3V0-41.19 PDF and VCE dumps Download

---

Correct Answer: ACD

<https://blogs.vmware.com/networkvirtualization/2019/02/ipv6-support-in-nsx-t-2-4.html/--vetted>

[Latest 3V0-41.19 Dumps](#)

[3V0-41.19 PDF Dumps](#)

[3V0-41.19 Braindumps](#)