400-351^{Q&As}

CCIE Wireless Written

Pass Cisco 400-351 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/400-351.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

QUESTION 1

When configuration an autonoumous access point, which configuration broadcasts two SSIDs?

A. dot11 ssid data1 vlan 10 authentication open authentication key-managerment wpa version 1 wpa-psk ascii cisco123 end ! dot11 ssid data2 vlan 11 authentication open authentication key-management wpa version 2 wps-psk accii Cisco12345 end

B. dot11 ssid data1 vlan 10 authentication open authentication key-management wpa version 1 wpa-psk ascii cisco123 mbssid guest-mode end ! dot11 ssid data2 vlan 11 authentication open authentication key-management wpa version 2 wpa-psk accii Cisco12345 mbssid guest-mode end

C. mbssid ! dot11 ssid data1 vlan 10 authentication open authentication key-management wpa version 1 wpa-psk ascii cisco123 end ! dot11 ssid data2 vlan 11 authentication open authentication key-management wpa version 2 wpa-psk accii Cisco12345 end

D. dot11 ssid data1 vlan 10 authentication open authentication key-management wpa version 1 wpa-psk ascii cisco123 guest-mode end ! dot11 ssid data2 vlan 11 authentication open authentication key-management wpa version 2 wpa-psk ascii cisco12345 guest-mode end

E. dot11 ssid data1 vlan 10 authentication open authentication key-management wpa version 1 wpa-psk ascii cisco123 mbssid end ! dot11 ssid data2 vlan 11 authentication open authentication key-management wpa version 2 wpa-psk accii Cisco12345 mbssid end

Correct Answer: B

CLI Configuration Example

This example shows the CLI commands that you use to enable multiple BSSIDs on a radio interface, create an SSID called *visitor*, designate the SSID as a BSSID, specify that the BSSID is included in beacons, set a DTIM period for the BSSID, and assign the SSID *visitor* to the radio interface:

```
router(config)# interface dot11 0
router(config-if)# mbssid
router(config-if)# exit
router(config)# dot11 ssid visitor
router(config-ssid)# mbssid guest-mode
router(config-ssid)# exit
router(config)# interface dot11 0
router(config-if)# ssid visitor
```

You can also use the **dot11 mbssid** global configuration command to simultaneously enable multiple BSSIDs on all radio interfaces that support multiple BSSIDs.

http://www.cisco.com/c/en/us/td/docs/routers/access/1800/wireless/configuration/guide/awg /s37ssid.pdf
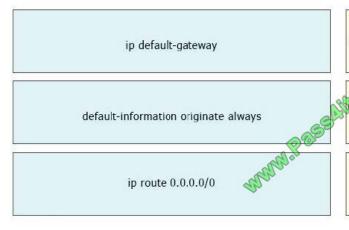
QUESTION 2

DRAG DROP

Drag and drop the route type on the left to their intended usage on the right.
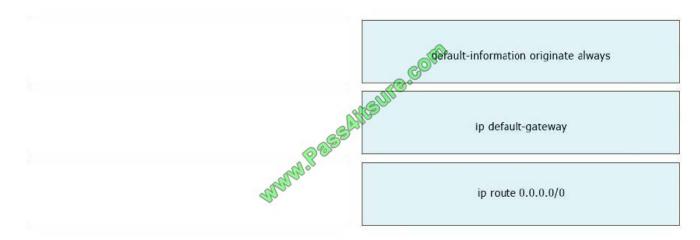
Select and Place:

ip default-gateway	This route is used to generate a default route into an IS-IS or OSPF routing domain. A default route will be advertised even if there is no default route in the table
default-information originate always	This route is used when IP routing is enabled on the router to route any packets that do not have an exact route match in the routing table. The default route will not be propagated by the routing protocol
ip route 0.0.0.0/0	This route is used when IP routing is disabled on the router

Correct Answer:

default-information originate always
ip default-gateway
ip route 0.0.0.0/0

QUESTION 3

In a Cisco ACI environment, which option best describes "contracts"?

A. a set of interaction rules between endpoint groups

B. a Layer 3 forwarding domain

C. to determine endpoint group membership status

D. named groups of related endpoints

Correct Answer: AC

QUESTION 4

At which data rates are the multicast packets transmitted from an autonomous AP?

A. lowest configured basic rate

B. lowest mandatory basic rate

C. highest configured basic rate

D. highest mandatory basic rate

Correct Answer: C

QUESTION 5

You are using optimized roaming to resolve a problem of sticky clients that remain associated to access points that are far away. Which two statements about optimized roaming are true? (Choose two.)

A. Optimized roaming actively monitors probe RSSI packets.

B. One of the conditions that must be met for a client to be disassociates clients when the RSSI is higher than the set threshold.

C. Optimized roaming prevents client disassociation when the client RSSI is low.

D. You cannot configure the optimized roaming interval until you disable the 802.11a/b network.

Correct Answer: B

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.pass4itsure.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: