



**Alcatel-Lucent Services Architecture** 

# Pass Alcatel-Lucent 4A0-104 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/4a0-104.html

## 100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

Instant Download After Purchase


- 100% Money Back Guarantee
- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





#### **QUESTION 1**

Click the exhibit.

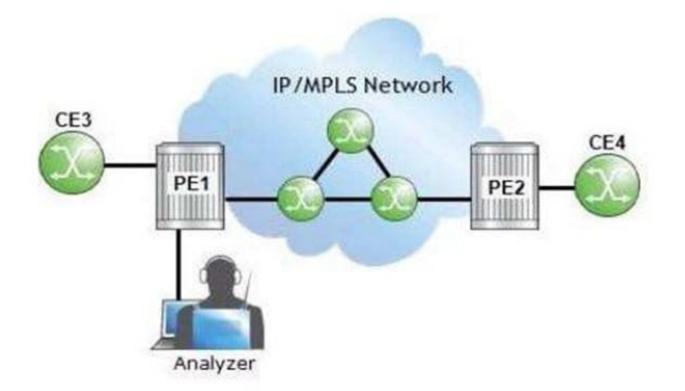

The operator at PE1 wants to analyze the traffic between CE4 and PE2. On a Nokia 7750 SR, which of the following is required as part of the configuration?

- A. Both PE1 and PE2 need a mirror source.
- B. PE2 needs a mirror source with the remote source specified.
- C. PE1 needs a mirror source with the remote source specified.
- D. Both PE1 and PE2 need a mirror destination.
- E. PE2 needs a mirror destination that specifies a SAP.

Correct Answer: D

#### **QUESTION 2**

The SAP 1/1/1:2.3 receives an untagged Ethernet frame. Which of the following is TRUE?

- A. The frame is dropped.
- B. VLAN tags 2 and 3 are added to the frame.



- C. Only outer VLAN tag 2 is added.
- D. Only inner VLAN tag 3 is added.

Correct Answer: A

#### **QUESTION 3**

Which of the following commands is used to enable an E-pipe service?

- A. config>service# epipe service-id enable
- B. config>service# vpws service-id enable
- C. config>service# service-id no shutdown
- D. config>port# port-id no shutdown
- E. config>service# epipe service-id no shutdown

#### Correct Answer: E

#### **QUESTION 4**

In a Layer 2 encapsulation, using Martini, what does the first (top) label represent?

- A. Tunnel Label
- B. VC Label
- C. Operational Control Word
- D. UNI
- E. NNI
- Correct Answer: A

#### **QUESTION 5**

Which of the following about route distinguishers on the Nokia 7750 SR is FALSE?

- A. Route distinguishers are contained in VPN-IPv4 prefixes.
- B. Route distinguishers allow the same IP prefix to be used for more than one destination in a single VPRN.
- C. Route distinguishers allow MP-BGP to manage multiple routes for the same IP prefix.
- D. Route distinguishers are only used by the PE routes.

### Correct Answer: B



4A0-104 Practice Test

4A0-104 Study Guide

4A0-104 Braindumps