



4A0-104^{Q&As}

Alcatel-Lucent Services Architecture

Pass Alcatel-Lucent 4A0-104 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-104.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

A service needs to accept frames that have the following: an outer VLAN tag of 200 with an inner VLAN tag of 33; and frames that have an outer VLAN tag of 250 with an inner VLAN tag of 33. What SAP(s) need to be configured?

- A. 1/1/1:200.*
- B. 1/1/1:*.33
- C. 1/1/1:.*
- D. This requires two SAPs: 1/1/1:200.33 and 1/1/1:250.33

Correct Answer: D

QUESTION 2

Which of the following about VPRN route targets is FALSE?

- A. A route target is used to distinguish to which VRF table a prefix belongs.
- B. A route target appended to an IPv4 prefix produces a VPN-IPv4 prefix.
- C. Multiple route targets can be part of a single MP-BGP update.
- D. Route targets must be configured for VPRNs.

Correct Answer: B

QUESTION 3


Which of the following about the VPN-IPv4 address family is FALSE?

- A. VPN-IPv4 allows multiple customers to have overlapping IP addresses.
- B. CE routers use VPN-IPv4 prefixes to differentiate between services.
- C. PE routers are responsible for creating VPN-IPv4 prefixes.
- D. A VPN-IPv4 prefix is composed of a route distinguisher (RD) and an IPv4 address.

Correct Answer: B

QUESTION 4

Click the exhibit.

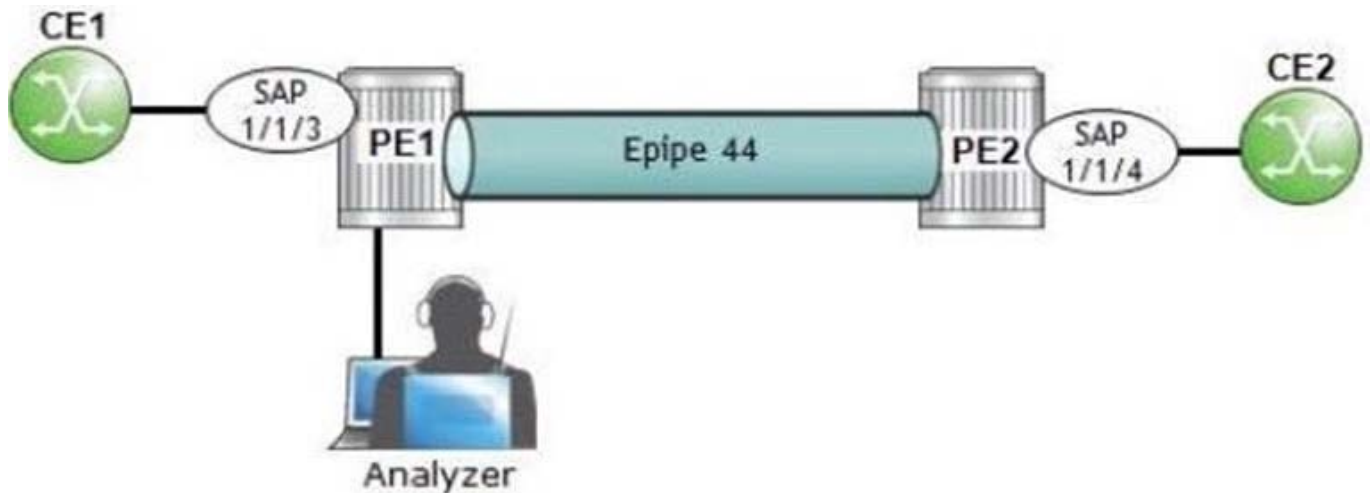

An operator at PE1 wants to analyze the traffic between CE1 and PE1 on SAP 1/1/3. On a Nokia 7750 SR, which of the following is NOT required as part of the configuration?

- A. A mirror source with a defined source type.
- B. A mirror source defined with an SDP destination.
- C. A mirror destination with a SAP defined.
- D. A mirror destination and a mirror source with the same service ID.

Correct Answer: B

QUESTION 5

SAPs in an E-pipe service can only be configured on Ethernet ports

- A. TRUE
- B. FALSE

Correct Answer: B

[4A0-104 Study Guide](#)

[4A0-104 Exam Questions](#)

[4A0-104 Braindumps](#)