



4A0-104^{Q&As}

Alcatel-Lucent Services Architecture

Pass Alcatel-Lucent 4A0-104 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-104.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which of the following about the components of a distributed service on the Nokia 7750 SR is TRUE?

- A. A SAP can only be used by one service on a router.
- B. A dedicated SDP needs to be created for each service.
- C. A service is created on each site before the customer is created.
- D. SAPs must be created before a service is created.

Correct Answer: A

QUESTION 2

Which of the following is TRUE when a service uses a GRE transport tunnel?

- A. The service takes a route determined by the IGP.
- B. The tunnel does not use a service label.
- C. The service label is swapped at each hop in the transport network.
- D. The tunnel is bidirectional and only requires configuration at one end of the service.

Correct Answer: A

QUESTION 3


Which of the following statements is NOT a valid reason to use MP-BGP as a routing protocol to transport VPRN routes?

- A. The number of VPRN routes can become very large. MP-BGP can support a very large number of routes.
- B. MP-BGP can carry routing information for a number of different address families.
- C. MP-BGP is designed to exchange information between routers that are not directly connected. This feature keeps VPRN routing information out of P-routers.
- D. MP-BGP can carry additional information attached to a route as an optional BGP attribute.
- E. All of the above statements are valid reasons for using MP-BGP as a VPRN routing protocol.

Correct Answer: E

QUESTION 4

Click the exhibit.

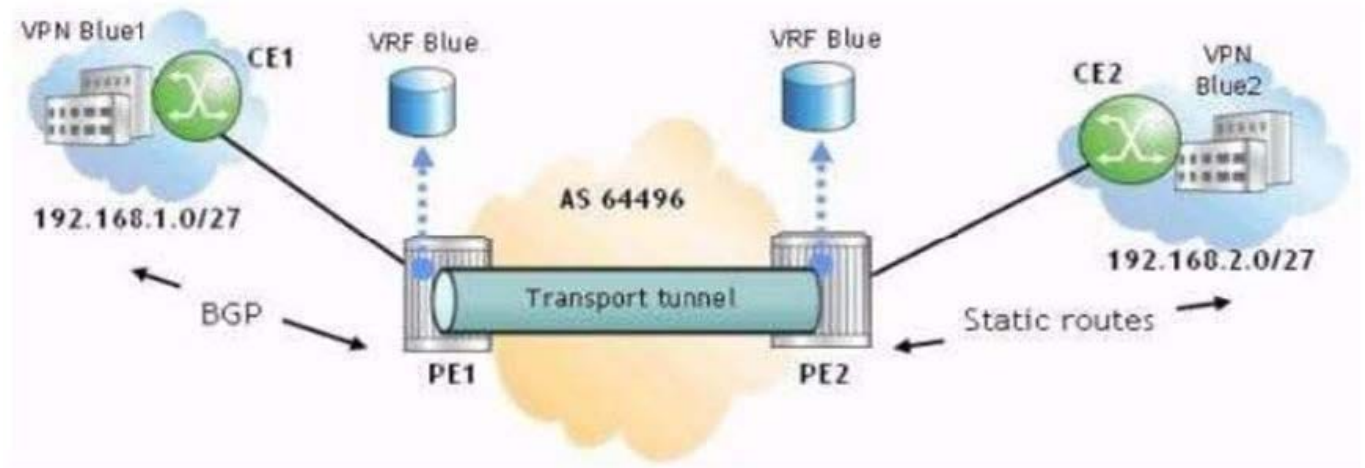

Routes are exchanged between CE1 and PE1 using BGP. CE2 and PE2 use static routes to forward traffic to and from the VPRN. Which of the following is FALSE?

- A. An export policy is required on PE1 to advertise routes to CE1.
- B. An export policy is required on CE1 to advertise local routes to PE1.
- C. An export policy is required to advertise routes between the PE routers.
- D. No export policy is required on PE2 or CE2 due to the static routes.

Correct Answer: C

QUESTION 5

What are the two major differences between configuring an IES service and configuring VPWS or VPLS services? (Choose two.)

- A. IES does not support QoS.
- B. IES has a configurable IP-MTU
- C. A virtual route table must be configured for an IES service.
- D. An IES interface has an IP address assigned to it.

Correct Answer: BD

[4A0-104 PDF Dumps](#)

[4A0-104 Study Guide](#)

[4A0-104 Braindumps](#)