



4A0-107^{Q&As}

Alcatel-Lucent Quality of Service

Pass Alcatel-Lucent 4A0-107 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-107.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**


How many bits in the IP ToS field define the packet's precedence?

- A. 3
- B. 4
- C. 6
- D. 8

Correct Answer: A

QUESTION 2

Click the exhibit button below.

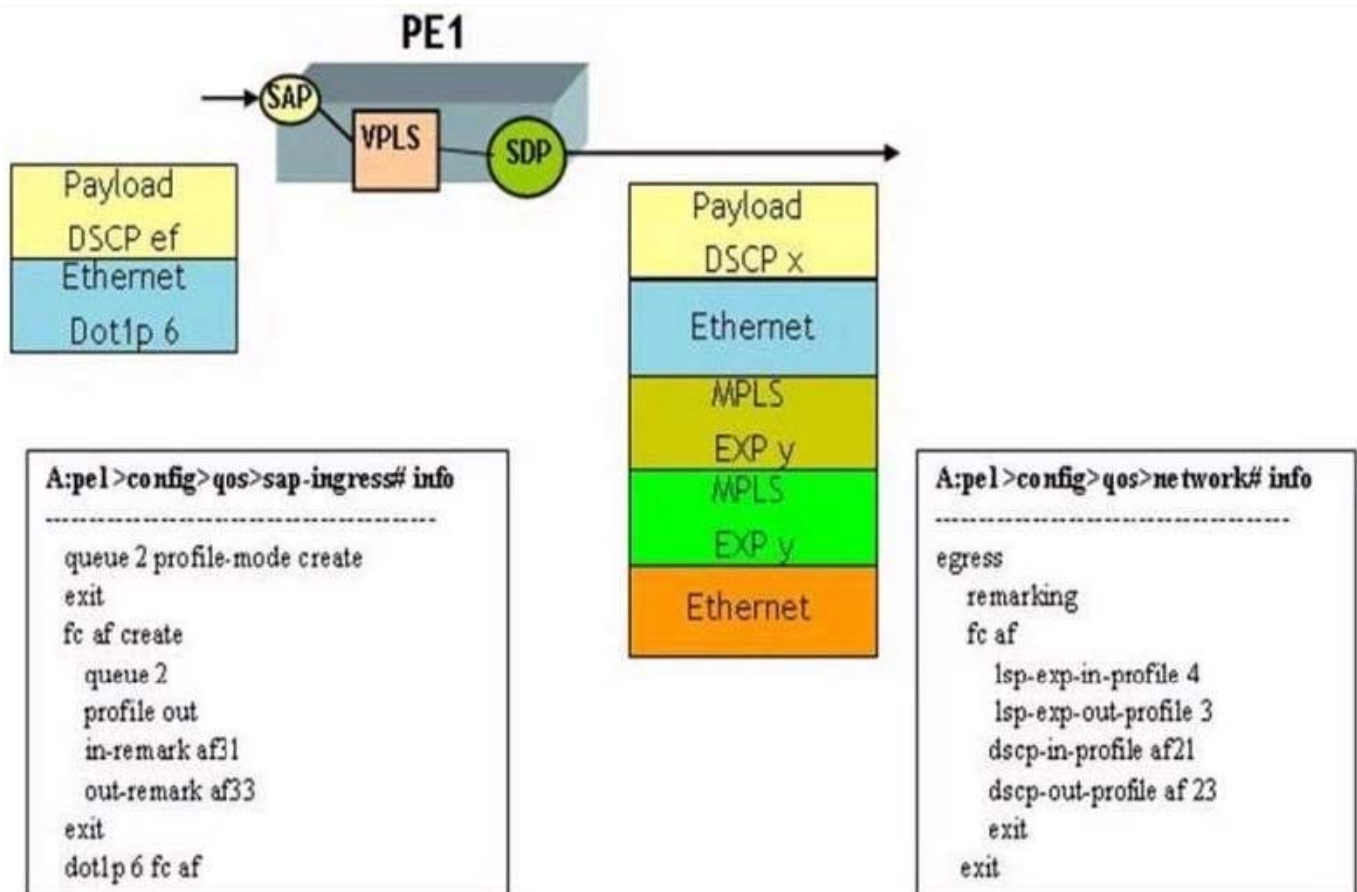

At router PE1, customer packets are arriving tagged with a dot1p value of 6 and marked with a DSCP value of EF.

Based on the configuration shown below for a VPLS service, what will be the DSCP and EXP marking for the packet egressing the network port on this PE router? (Choose two)



- A. The DSCP value will be set to af21.
- B. The DSCP value will be set to af23.
- C. The DSCP value will remain as ef.
- D. The EXP value, in the MPLS headers, will be set to 4.
- E. The EXP value, in the MPLS headers, will be set to 3.

Correct Answer: CE

QUESTION 3

Which of the following statements BEST defines policing?

- A. The process of delaying packets within a traffic stream to have them conform to a defined traffic profile.
- B. The overall treatment of a defined subset of a customer's traffic within a DiffServ domain.
- C. The process of discarding packets within a traffic stream in accordance with the state of a meter to enforce a defined traffic profile.
- D. The action of setting the DiffServ codepoint of a packet prior to its entry into a downstream DiffServ domain.
- E. A specified algorithm or operation that is implemented in a node in order to realize one or more per-hop behaviors.

Correct Answer: C

QUESTION 4


Which of the following are trusted boundaries, by default? (Choose two)

- A. An IES SAP
- B. A VPLS SAP
- C. A network port
- D. AVPRN SAP
- E. An access port

Correct Answer: CD

QUESTION 5

Packets enter the network via the ePipe SAP on PE1 with dot1p marking of 6. The VC type of the SDP interconnecting PE1 and PE2 is vlan. All network interfaces use the default network QoS policy. According to the configuration shown above, what is the inner dot1p value of the BE traffic egressing router PE2?

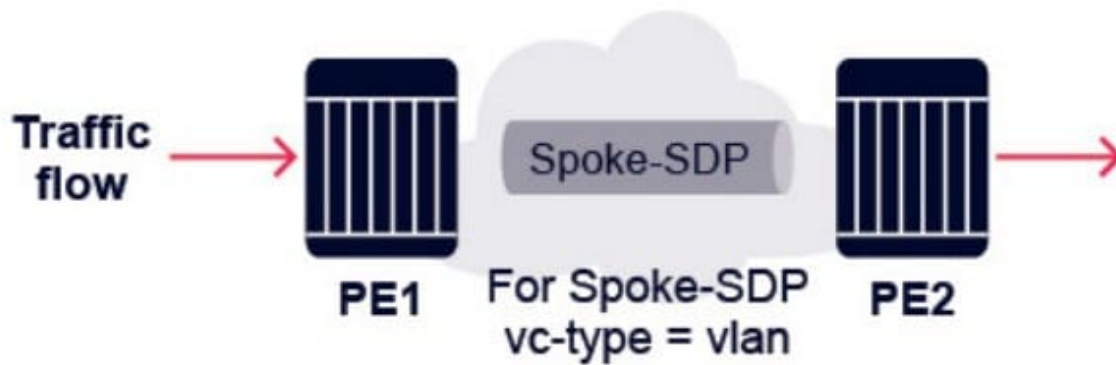

```
A:PE1# configure service epipe 11
A:PE1>config>service>epipe# info
sap 1/1/1:50
exit
spoke-sdp 12:11 vc-type vlan
```

```
A:PE2# configure service epipe 11
A:PE2>config>service>epipe# info
sap 2/2/2:11.22
  egress
    qos 10
    qinq-mark-top-only
  exit
exit
spoke-sdp 21:11 vc-type vlan
```

```
A:PE2# configure qos sap-egress 10
A:PE2>config>qos>sap-egress# info
queue 3 create
exit
fc be create
  queue 3
  dot1p 3
exit
```

- A. 0
- B. 3
- C. 6
- D. 22

Correct Answer: C

[4A0-107 PDF Dumps](#)

[4A0-107 Practice Test](#)

[4A0-107 Study Guide](#)