

4A0-108^{Q&As}

Alcatel-Lucent Multicast Protocols

Pass Alcatel-Lucent 4A0-108 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/4A0-108.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center


- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Refer to the following exhibit.

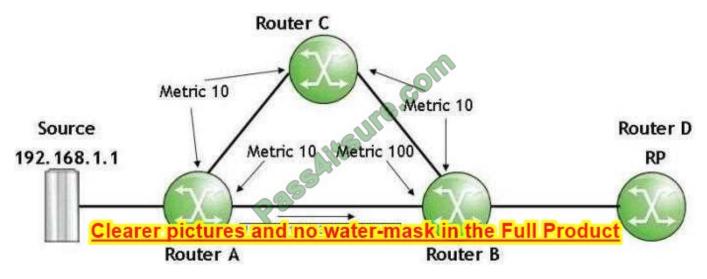

PIM is using the unicast table for RPF-check and the interface IGP metrics are shown. What will happen when Router B receives the multicast packet on its interface facing Router A?

- A. Discard the multicast packet as RPF-check fails
- B. Forward the multicast packet to Router D (RP) according to its routing table
- C. Forward the multicast packet out of all the interfaces in its (*,239.1.1.1) entry\\'s outgoing interface list
- D. Forward the multicast packet out of all the interfaces in its (192.168.1.1,239.1.1.1) entry\\'s outgoing interface list

Correct Answer: A

QUESTION 2

Which of the following about the S-PMSI is TRUE?

- A. The S-PMSI enables a PE to transmit packets to all other PEs in the same MVPN.
- B. The S-PMSI must be instantiated by MPLS P2MP P-tunnels.
- C. The S-PMSI is created and signaled by PIM or BGP Auto Discovery.
- D. An S-PMSI can be reused in multiple MVPNs.

Correct Answer: C

QUESTION 3

Which of the following regarding the use of RSVP-TE P2MP LSP as MVPN I-PMSI is TRUE?



https://www.pass4itsure.com/4A0-108.html

2022 Latest pass4itsure 4A0-108 PDF and VCE dumps Download

- A. If RSVP-TE P2MP LSP is used as I-PMSI, either mLDP or RSVP-TE P2MP LSP can be used as SPMSI.
- B. The signaling protocol used for S-PMSI is independent of that used for I-PMSI.
- C. If the signaling protocol used for I-PMSI is RSVP-TE, BGP must be used for signaling customer multicast information.
- D. The protocol used for signaling customer multicast information is independent of that used for the IPMSI.

Correct Answer: C

QUESTION 4

Where is the best placement of the Rendezvous Point in a PIM SSM network?

- A. As close as possible to the multicast source
- B. The Rendezvous Point is not required in a PIM SSM network
- C. In the redundant core
- D. As close as possible to the receiver
- E. The Rendezvous Point can be positioned at any router without impact

Correct Answer: B

QUESTION 5

Which of the following statements is true regarding BSR and RP?

- A. The same router cannot be configured as a BSR candidate and as a static RP
- B. The same router cannot be a candidate-RP and a BSR-candidate at the same time
- C. There is only one active RP in a multicast routing domain at anytime
- D. There is only one elected BSR in a multicast routing domain at anytime

Correct Answer: D

Latest 4A0-108 Dumps

4A0-108 PDF Dumps

4A0-108 Practice Test



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.pass4itsure.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4itsure, All Rights Reserved.