



# 4A0-C01<sup>Q&As</sup>

Nokia NRS II Composite Exam

**Pass Nokia 4A0-C01 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-c01.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

If the destination IP address of a received unlabeled packet is successfully matched in the FIB, which of the following statements are true? Choose two answers.

- A. A PUSH label stack operation must be performed.
- B. The outgoing interface and next-hop address will be determined from the FIB.
- C. The packet can be forwarded as a labeled or unlabeled packet.
- D. A POP label stack operation may be performed.

Correct Answer: BC

---

### QUESTION 2

In an OSPF network, which of the following is NOT a result of manual summarization on an ABR?


- A. It can reduce the topological database size.
- B. It can reduce the size of the route table.
- C. It can reduce the number of Summary LSAs.
- D. It can reduce the number of Router LSAs.

Correct Answer: D

---

### QUESTION 3

Click on the exhibit.

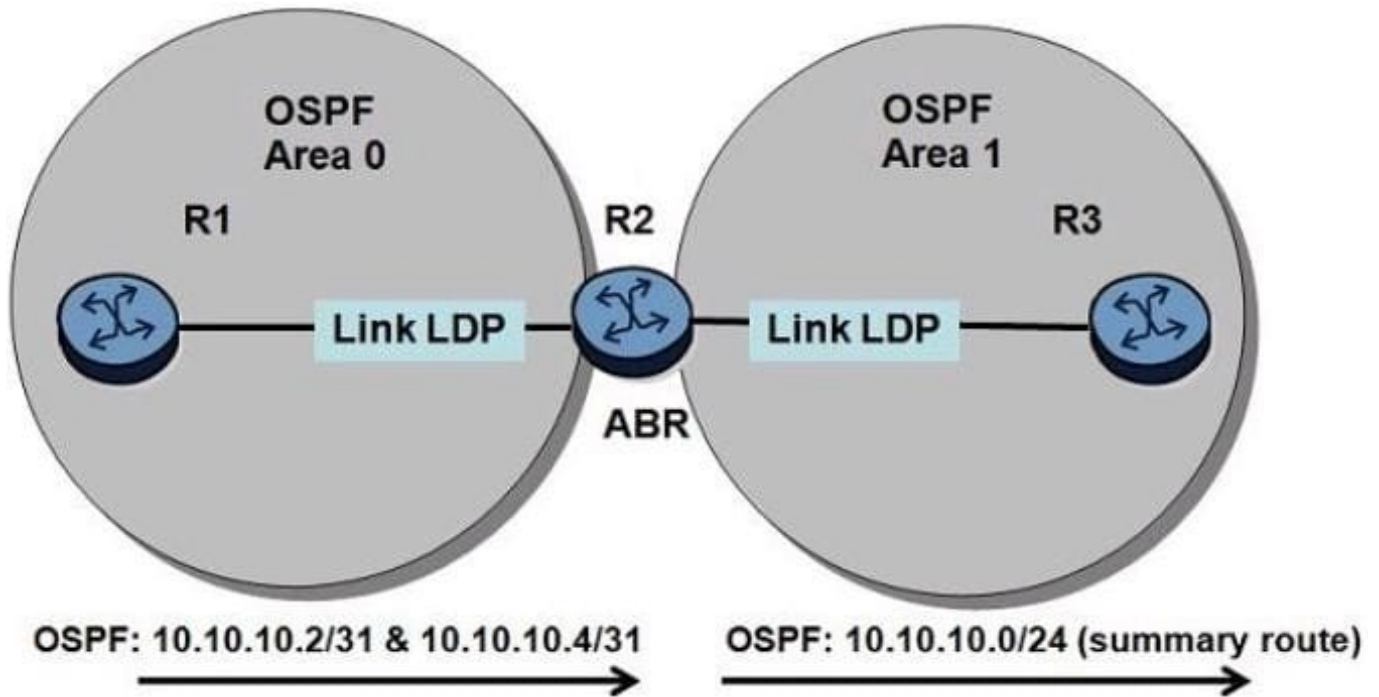

Router R2 advertises the aggregate prefix 10.10.10.0/24 into Area 1. Why would LDP aggregate-prefixmatch be enabled on router R3?

- A. To reduce the number of LDP sessions
- B. To reduce the number of LIB and LFIB entries
- C. To bypass the LDP exact prefix match rule
- D. To export summarized routes from OSPF to LDP

Correct Answer: C

#### QUESTION 4

Router R3 signals an LSP, reserving 1Gbps bandwidth on a 10Gbps link. RSVP configuration limits reservable bandwidth to 20 percent on the egress interface. Which of the following statements is true?

- A. The egress RSVP interface has 80 percent bandwidth unreserved.
- B. LSPs can reserve an additional 9.9 Gbps bandwidth on this RSVP interface.
- C. The head end reserves 100Mbps for the LSP.
- D. The egress RSVP interface has 1Gbps bandwidth unreserved.

Correct Answer: D

#### QUESTION 5



Which of the following is NOT a benefit of "Hub and Spoke" VPLS deployments?

- A. They reduce the number of SDPs that need to be configured.
- B. They can be used to work around physical topologies that prevent a fully meshed deployment.
- C. They prevent loops that can be introduced by mesh deployments.
- D. They can simplify the implementation of security policy enforcement and packet inspection.

Correct Answer: C

[Latest 4A0-C01 Dumps](#)

[4A0-C01 Study Guide](#)

[4A0-C01 Exam Questions](#)