



4A0-C01^{Q&As}

Nokia NRS II Composite Exam

Pass Nokia 4A0-C01 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-c01.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Nokia
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit below. The routers have an established IS-IS L2 adjacency on which IPv4 system addresses are exchanged. An operator successfully configures multi-topology IS-IS routing so that the IPv6 system addresses are also exchanged between routers. Which of the following statements best describes the number of IS-IS adjacencies and the number of LSPs in the LSDB of R1 AFTER IPv6 has been configured?

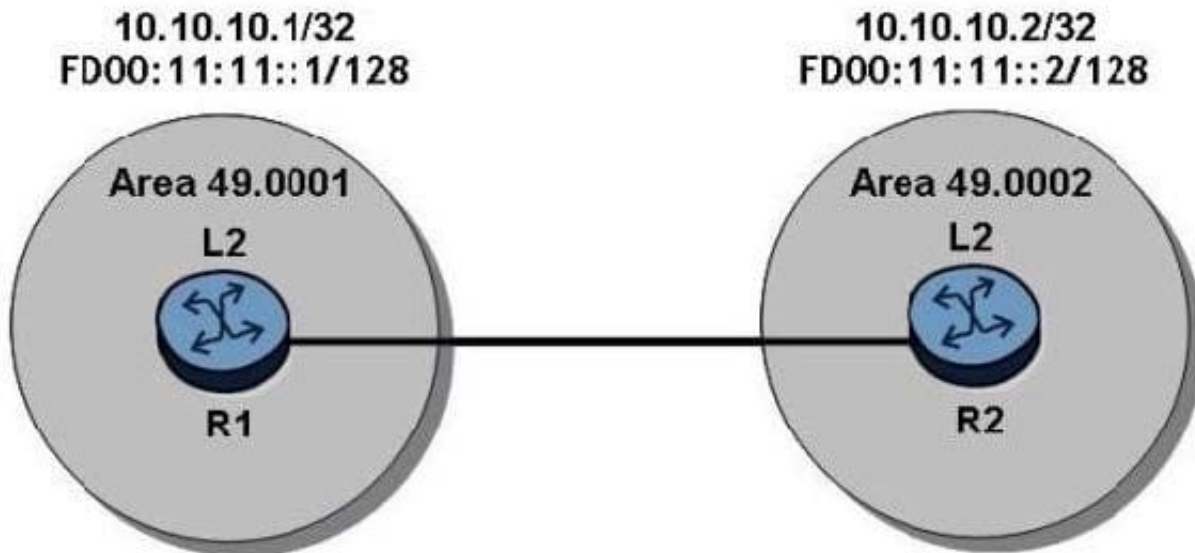

- A. R1 has one IS-IS adjacency and one LSP.
- B. R1 has one IS-IS adjacency and two LSPs.
- C. R1 has one IS-IS adjacency and four LSPs.
- D. R1 has two IS-IS adjacencies and two LSPs
- E. R1 has two IS-IS adjacencies and four LSPs

Correct Answer: B

QUESTION 2

A service needs to accept frames that have the following: an outer VLAN tag of 200 with an inner VLAN tag of 33; and frames that have an outer VLAN tag of 250 with an inner VLAN tag of 33. What SAP(s) need to be configured?

- A. 1/1/1:200.*
- B. 1/1/1:*.33
- C. 1/1/1:*.*
- D. This requires two SAPs: 1/1/1:200.33 and 1/1/1:250.33

Correct Answer: D

**QUESTION 3**

Click on the exhibit.

```
*A:SRC_R2# show router rsvp session

=====
RSVP Sessions
=====
From          To            Tunnel LSP   Name                                State
  ID          ID            ID    ID
-----
10.10.10.3    10.2.4.4      61440  2    bypass-link10.3.4.4                Up
10.10.10.1    10.2.4.4      61440  2    bypass-node10.10.10.3              Up
=====
Sessions : 2
=====
```

Which of the following about the bypass tunnel is FALSE?

- A. The router 10.10.10.1 is a PLR providing node protection for the router 10.10.10.3.
- B. One-to-one fast reroute protection is requested by an LSP.
- C. The bypass-link tunnel is used to avoid the link with the egress interface address 10.3.4.4.
- D. The bypass-node tunnel is used to avoid the next-hop downstream router 10.10.10.3.

Correct Answer: B

QUESTION 4

Which of the following regarding IS-IS DIS is FALSE?

- A. L1 and L2 routers elect separate DIS's.
- B. DIS uses a specific Ethernet multicast address to communicate with other routers on the broadcast network.
- C. If a new router starts up in a LAN and has a higher interface priority, the new router preempts the original DIS and becomes the DIS.
- D. In broadcast multi-access networks, such as Ethernet, one router is elected as the DIS and a second router as the backup DIS.

Correct Answer: D

QUESTION 5

Click the exhibit.



```
R1>config>service# info
-----
customer 1 create
  description "Default customer"
exit
customer 100 create
  description "Cust 100"
exit
sdp 2 mpls create
  far-end 10.10.10.2
  ldp
  keep-alive
  shutdown
exit
no shutdown
exit
epipe 12 customer 100 create
  sap 1/1/1:30 create
  exit
  spoke-sdp 2:44 create
  no shutdown
  exit
  no shutdown
exit
-----
```

Which of the following statements about the E-pipe service is TRUE?

- A. The service is a local service.
- B. The service requires a second spoke SDP on this router.
- C. The service's VC ID is 44.
- D. The service will accept VLAN tag 100.

Correct Answer: C

[Latest 4A0-C01 Dumps](#)

[4A0-C01 Study Guide](#)

[4A0-C01 Braindumps](#)