



4A0-C04^{Q&As}

Nokia NRS II Composite Exam: OSPF version

Pass Nokia 4A0-C04 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/4a0-c04.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers





QUESTION 1

What command could be used to verify proper configuration of a static route in an Nokia 7750 SR router?

- A. Show route-table
- B. Show router routing-table
- C. Show router route-table
- D. Show static

Correct Answer: C

QUESTION 2

Which MPLS mode saves only active label mappings received from peer LSRs?

- A. Conservative label retention
- B. Liberal label retention
- C. Downstream on demand
- D. Downstream unsolicited


Correct Answer: A

QUESTION 3

Click the exhibit button.



Exhibit 1.1.j

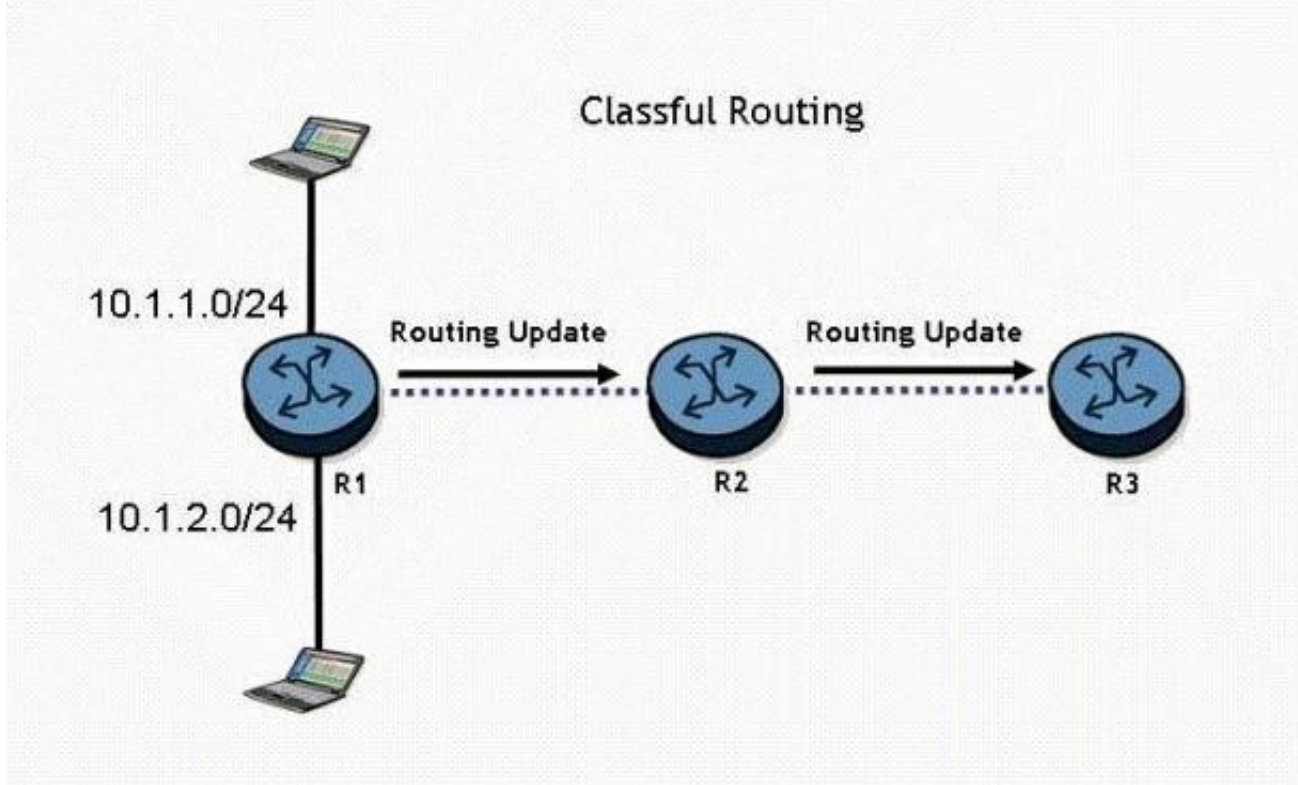

Routers R1, R2, and R3 are running a classful routing protocol between them. Assuming that router R1 advertises all directly connected networks, how will these networks be represented in router R3's routing table?

- A. Router R3's routing table can only contain one of the routes, which will result in route flapping.
- B. Router R3's routing table will have one entry for 10.1.1.0/24 and one entry for 10.1.2.0/24.
- C. The networks will be represented with one entry of 10.0.0.0/8 in router R3's routing table.
- D. The networks will be represented with one entry of 10.0.0.0/24 in router R3's route table.


Correct Answer: C

QUESTION 4

Click the exhibit button.



Exhibit 6.1.c

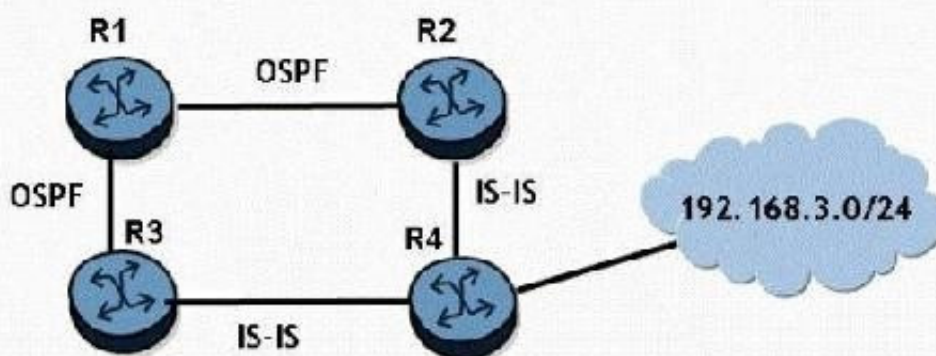


If router R2 redistributes the IS-IS route to 192.168.3.0/24 into OSPF, router R3 preference of these two routes? Choose two answers.

- A. The OSPF internal preference
- B. The IS-IS Level 1 internal preference
- C. The IS-IS Level 2 internal preference
- D. The OSPF external preference
- E. The IS-IS Level 2 external preference
- F. The IS-IS Level 1 external preference

Correct Answer: BD

QUESTION 5

Click on the exhibit.

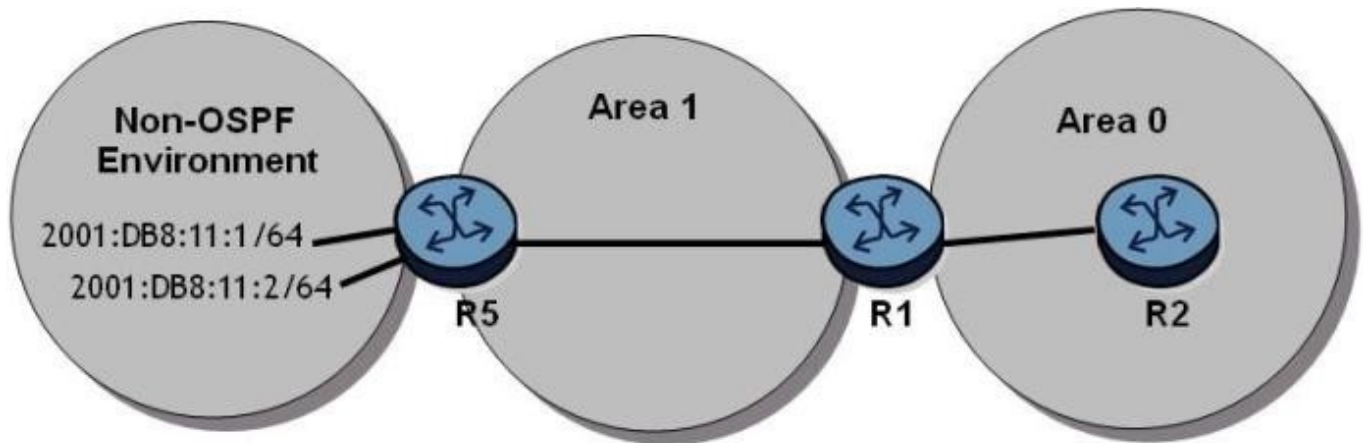

The route table on router R2 shows the system address of router R5 but it does not show any of the interfaces from the non-OSPF area.

What may be causing this?

- A. \\\nasbr\\' is missing from router R1\\'s configuration.
- B. Router R1 needs to have an export policy added to it.
- C. Router R5 does not have an export policy for these prefixes.
- D. Router R1 needs to have an import policy added to it.

Correct Answer: C

[4A0-C04 VCE Dumps](#)

[4A0-C04 Study Guide](#)

[4A0-C04 Braindumps](#)