



500-220^{Q&As}

Cisco Meraki Solutions Specialist

Pass Cisco 500-220 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/500-220.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


Which Meraki Dashboard menu section is accessed to enable Sentry enrollment on an SSID?

- A. Wireless > Configure > Access Control
- B. Wireless > Configure > Splash page
- C. Wireless > Configure > Firewall and Traffic Shaping
- D. Wireless > Configure > SSIDs

Correct Answer: A

Reference: https://documentation.meraki.com/MR/MR_Splash_Page/Systems_Manager_Sentry_Enrollment

QUESTION 2

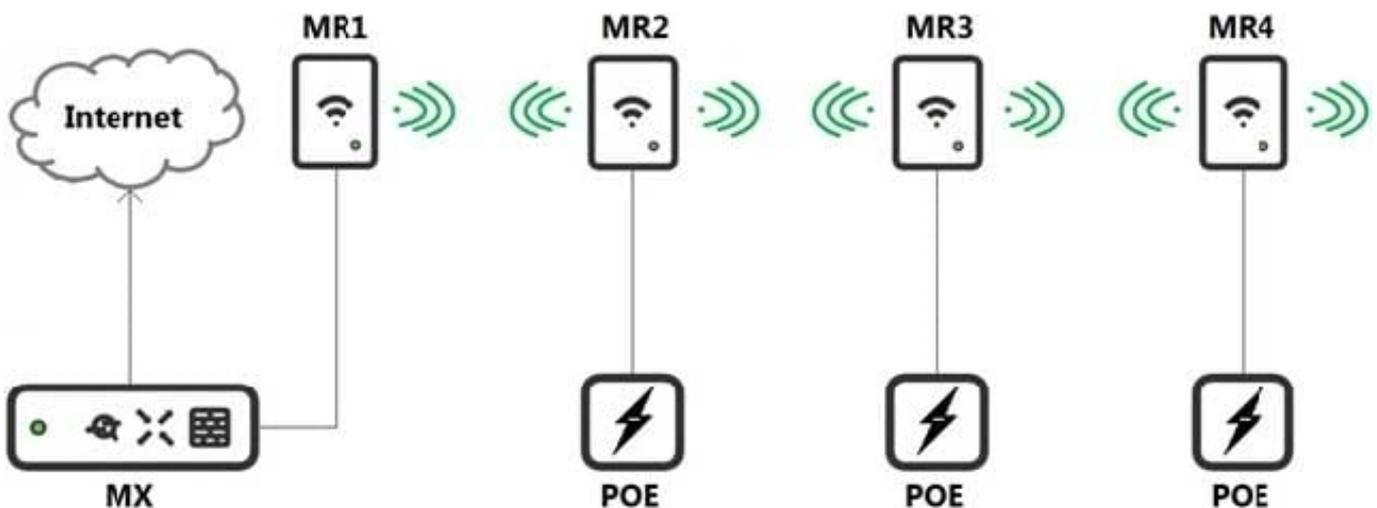

Refer to the exhibit. Which design recommendation should be considered?

- A. A 25-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 1-hop maximum.
- B. A 25-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 2-hop maximum.
- C. A 50-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 1-hop maximum.
- D. A 50-percent throughput loss occurs for every hop. Cisco Meraki best practice recommends a 2-hop maximum.

Correct Answer: C

QUESTION 3



● Corp MX 1
MX450
PRIMARY



ADDRESS
PRIMARY
Current master


Summary Uplink

Live data
Ports

	Internet	GbE				SFP				SFP+			
	1	3	5	7	9	11	13	15	17	19	21	23	25
Management													
	2	4	6	8	10	12	14	16	18	20	22	24	26

Historical data for the last day

Connectivity



Refer to the exhibit. The VPN concentrator is experiencing issues. Which action should be taken to ensure a stable environment?

- A. Add a deny any/any firewall rule to the end of the firewall rules.
- B. Remove the connection from Internet 1.
- C. Physically disconnect all LAN ports.
- D. Configure the MX appliance to Routed mode on the Addressing and VLANS page.

Correct Answer: C

QUESTION 4

Which order is accurate for a firmware upgrade on MX appliances in a high-availability configuration?

- A. starts on the secondary MX appliance and then occurs on the primary MX appliance
- B. starts on both MX appliances at the same time and then reboots both appliances after traffic on the primary MX appliance ceases
- C. starts on both MX appliances at the same time and then immediately reboots both appliances
- D. starts on the primary MX appliance and then occurs on the secondary MX appliance

Correct Answer: D

Reference: <https://community.meraki.com/t5/Security-SD-WAN/Firmware-Update-to-HA-unit/td-p/47865>



QUESTION 5

DRAG DROP

Drag and drop the settings from the left into the boxes on the right to indicate if the setting will be cloned or not cloned using the Cisco Meraki MS switch cloning feature.

Select and Place:

switch management IP	Cloned
switch name	
port name	
interface type	Not Cloned
STP bridge property	

Correct Answer:



Cloned
switch management IP
interface type
STP bridge property
Not Cloned
switch name
port name

[500-220 PDF Dumps](#)

[500-220 Study Guide](#)

[500-220 Exam Questions](#)