

5V0-41.20^{Q&As}

VMware SD-WAN Troubleshoot

Pass VMware 5V0-41.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/5v0-41-20.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by VMware Official Exam Center

Instant Download After Purchase

- 100% Money Back Guarantee
- 🔅 365 Days Free Update
- 800,000+ Satisfied Customers






QUESTION 1

Scenario 3:

After resolving numerous connectivity Issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

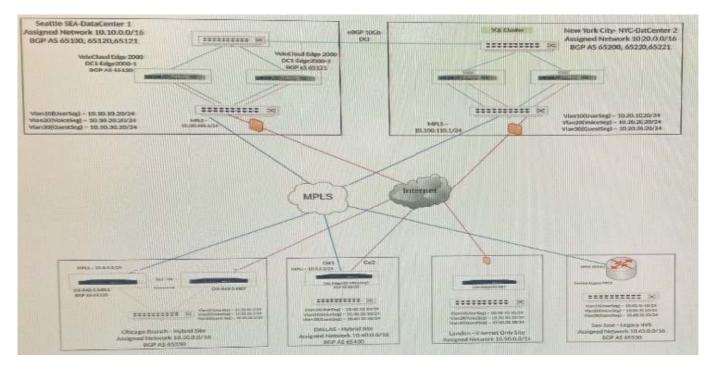

Users at a remote office are complaining about poor performance with certain applications. The network administrator has already verified the configuration is correct.

Which two parameters should the administrator review to troubleshoot this issue? (Choose two.)

- A. Check the underlay network (bandwidth, latency, jitter, packet loss)
- B. Change the bandwidth measurement under WAN Overlay Advanced Settings
- C. Check the flows to verify which Business Policy the traffic of interest is matching
- D. Look under Monitor, check Business priority tab

Correct Answer: AD


QUESTION 2



Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

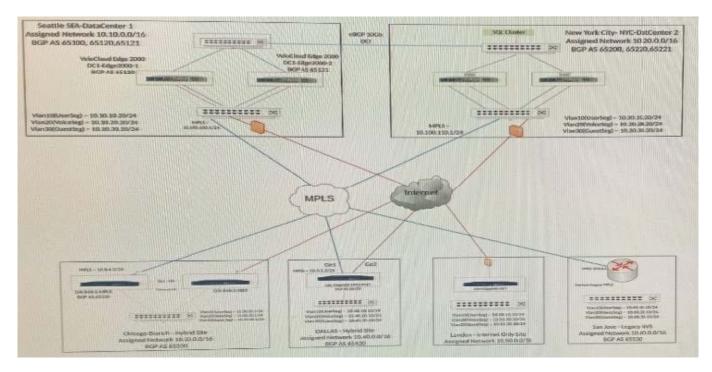

A network administrator decides to deploy a local Checkpoint VNF appliance on the Edge in London to cut back on unnecessary traffic towards the NY Hub location. While attempting to deploy the VNF, the process keeps failing.

Where can the administrator check to see more detail?

- A. VCO > Monitor > Logging
- B. VCO > Monitor > Events
- C. VCO > Test and Troubleshoot > Remote Diagnostics > Events
- D. VCO > Test and Troubleshoot > Remote Actions > Alerts

Correct Answer: B

QUESTION 3

Scenario 1:




The Dallas Branch location is having issues getting activated. The local network administrator is aware that the Edge device received a DHCP address and was able to connect to the internet. The Orchestrator is reporting the Edge as Down. No other changes were made post activation.

A network administrator is tasked with enabling SD-WAN at three branch locations. A topology has been provided for reference. For each site, the administrator is having issues bringing edges

online, as another administrator has gone ahead and created a configuration ahead of time. The organization has several branch sites. One is am Internet-only site and two are Hybrid locations with both internet and MPLS. The last location is MPLS only. There are hub data center locations in this environment as well. Please refer to the topology.

Refer to the Exhibit(s).



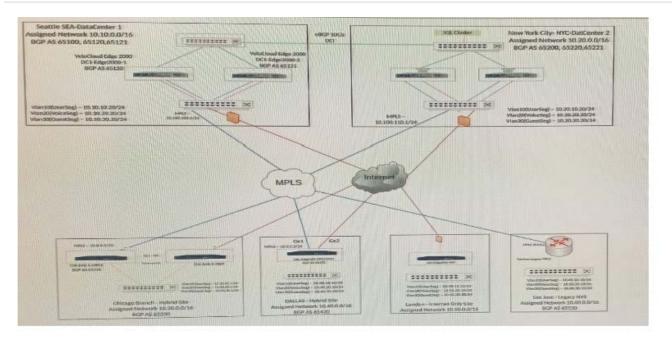

ice Me Interface EB LAN1 EB LAN2	EE Switch	t d'ort Settlerge	B Rented Interface S	CONTRACTOR OF THE OWNER OF THE OWNER		COLUMN TWO IS NOT THE OWNER.		
Ide Interface				@ Resided Interface Settings			Multicast	
ELANT								
ALL DOT TO		WEARING	Addressing	WAN Overlay	Segment	ROMP PIM	VNF Insertion	
ELLANZ	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 - Corporate			Global Segment		STATISTICS.	
and the second se	Accouse	1 - Corporate			Global Segment		UNION AND AND C	
ELANS	Accesses	1 - Corporate			Global Segment			
the second s	Acctemp.	1 - Corporate	in the survey of the later of the		Global Segment		The state of the state	
Elans	Trunk	1 - Corporate 10 - UserSieg 20 - VoiceSeg 30 - GuestSieg			Global Segment Global Segment Global Segment Global Segment			
ELANS	Access	1 - Corporate			Global Segment			
ELAN7	Access	1 - Corporate			Global Segment			
ELANS	Accesses	1 - Corporate	the state of the s		Global Segment		Little and the second	
e © GEI			Static Concer Top of 2009 Catoway 12:0:5-1	1 User Defined	all segments		*	
e Darz			DHCP	L User Defined	all segments		26	
@SFP1			DHCP	= Auto Detect	all segments		24	
@ SFP2			DHOP	= Auto Detect	all segments		×	
	SWID	1 - Corporate			Global Segment			
	distant of the	e dasabled						
	BLAN7 BLAN5 C GE1 S D GE2 C SFP1 C SFP2 S BWLAN1	BLANS Trunk BLANS Access BLANS Access BLANS Access GGE1 GGE2 GGE2 SFP1 GSFP2 SEP2 SEWLANT W/h	El LANS Trurk 1 - Corporate 10 - UnerSteg 20 - VoiceSteg 20 - VoiceSteg 20 - Corporate El LANS Access 1 - Corporate El LAN7 Access 1 - Corporate El LAN7 Access 1 - Corporate El LAN8 Access 1 - Corporate	El LANS Trunis 1 Corporate 10 - UserSkip 20 - VoiceSkip 20 - VoiceSkip 20 - VoiceSkip 20 - VoiceSkip 20 - VoiceSkip 20 - Corporate El LANS Access 1 - Corporate	EB LANS Trunk 1 - Corporate 10 - UserSteg 20 - VoiceSteg 20 - VoiceSteg 30 - GuessEgg EB LANS Access 1 - Corporate EB LANS With 1 - Corporate	EB LANS Trunk 1 - Corporate 10 - UsedSlag 20 - VoiceSlog 20 - VoiceSlog 30 - GuesSlog Global Segment Global Segment Global Segment EB LANS Access 1 - Corporate Global Segment Global Segment EB LANS Access 1 - Corporate Global Segment Global Segment EB LANS Access 1 - Corporate Global Segment EB LANS Access 1 - Corporate Static Corporate 1 User Defined B GE1 DHCP Auto Datact all segments B SEP2 DHCP Auto Datact all segments B SEP2 DHCP Auto Detect all segments B SEP2 DHCP Auto Detect all segments	BLANS Trunk 1 - Corporate 10 - UserSeq 20 - VoiceSing 20 - VoiceSing	

What is the cause of this issue?

A. The activation link did not specify the updated image location requiring the Edge to be re-activated.

B. The activation link did not contain any post-activation configuration to allow the Orchestrator to communicate with the Edge.

- C. The Edge will be offline for about 4 hours until it has completed the factory image installation.
- D. The activation link contained incorrect configurations for WAN overlays and WAN interfaces.




Correct Answer: A

QUESTION 4

Scenario 2:

After resolving numerous connectivity Issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

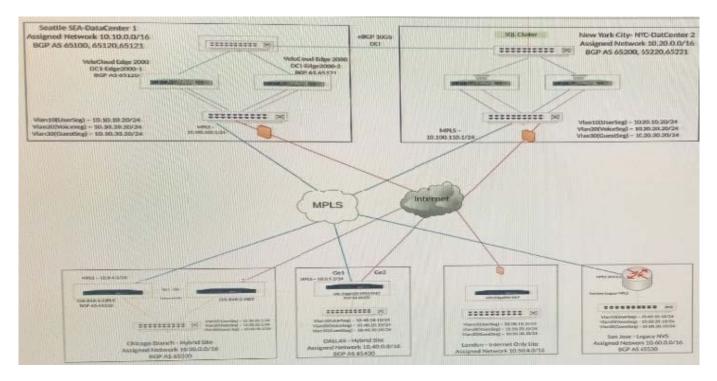

A network administrator has configured a Business Policy to send a specific application directly out an underlay interface. Users have complained of slow responses for that application. While troubleshooting, the network administrator finds the traffic is actually taking an overlay path to another SD-WAN Edge.

What is causing this behavior?

- A. The other Edge location is advertising a secure route for the application\\'s subnet.
- B. ul has been configured forcing traffic into the underlay towards the hub.
- C. Configuring Business Policy Direct settings have no affect on traffic flows.
- D. Internet Backha.
- E. The underlay path is not available forcing traffic into the overlay.




Correct Answer: E

QUESTION 5

Scenario 3:

After resolving numerous connectivity Issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

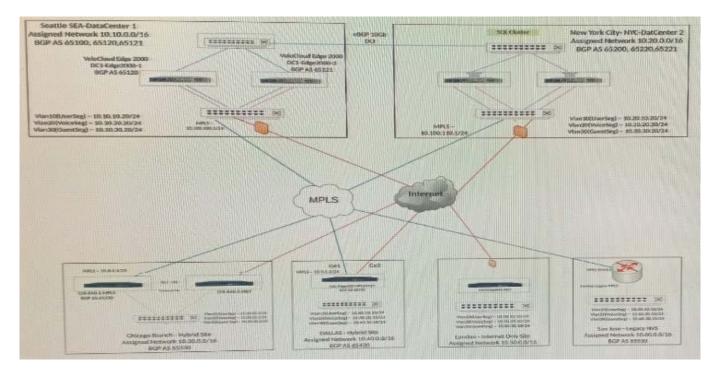

The network administrator has been made aware that Chicago is receiving traffic from non- SD-WAN sites, bottlenecking Chicago\\'s interfaces. The network administrator\\'s VMware SE has mentioned using the uplink feature to help resolve this.

What are two ways the uplink feature should be used in this scenario? (Choose two.)

- A. Set the uplink community to forward traffic to a group of neighbors.
- B. Direct all traffic to that neighbor designated as an uplink,
- C. Stop mutual redistribution of routes from underlay and overlay.
- D. Prevent the site in question from becoming a transit site.

Correct Answer: BD



Latest 5V0-41.20 Dumps

5V0-41.20 PDF Dumps 5V0-41.2

5V0-41.20 Exam Questions