

642-980^{Q&As}

Troubleshooting Cisco Data Center Unified Fabric

Pass Cisco 642-980 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/642-980.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.pass4itsure.com/642-980.html 2022 Latest pass4itsure 642-980 PDF and VCE dumps Download

QUESTION 1



https://www.pass4itsure.com/642-980.html

2022 Latest pass4itsure 642-980 PDF and VCE dumps Download

structions


 \times

- Enter NX-OS commands on the device to verify network operation and answer the multiple-choice questions.
- THIS TASK DOES NOT REQUIRE DEVICE CONFIGURATION.
- · Click on the Console PC to gain access to the console of the router. No console or enable passwords are required.
- To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
- There are three multiple-choice questions with this task. Be sure to answer all three questions before clicking the Next button

Scenario

 \times

The following three troubleshooting questions concern the Cisco Nexus 7000 and Nexus 5000 switches, which are at the core of the data center network. You can utilize all the available **show** commands to answer the questions. Access to the running configuration is not allowed.

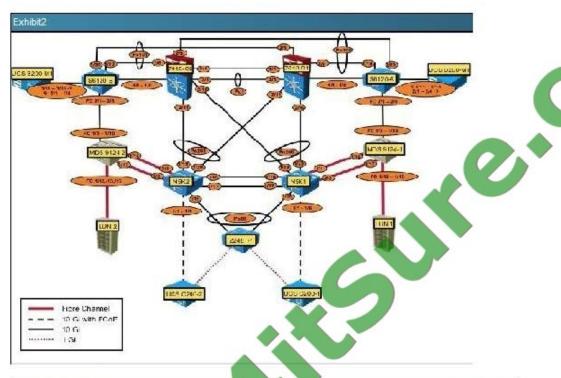





https://www.pass4itsure.com/642-980.html 2022 Latest pass4itsure 642-980 PDF and VCE dumps Download



Fibre Channel traffic on VSAN 12 between N5K2 and MDS9124-2 is degraded. Which statement explains the cause of this degradation?

- A. Performance is decreased by half due to the incorrect port type being used.
- B. The load-balancing scheme for VSAN 12 should be src-id/dst-id.
- C. B2B credits on N5K2 should be increased to 128.
- D. A VSAN port channel must be configured between N5K2 and MDS9124-2.

Correct Answer: D

N5K1#

QUESTION 2

Refer to the exhibit.

https://www.pass4itsure.com/642-980.html

2022 Latest pass4itsure 642-980 PDF and VCE dumps Download

```
Nexus 1:
vpc domain 10
role priority 1
system-priority 1
peer-keepalive destination 1/1.1.1 source 1.1.1.2

Nexus 2:
vpc domain 10
role priority 2
system-priority 2
peer-keepalive destination 1.1.1.2 source 1.1.1.
```

You configure a vPC between two Cisco Nexus 7010 Switches. The peer link will not come up.

What is the problem?

- A. The vPC domain numbers must be different.
- B. The role priority must be the same.
- C. The system priority must be the same.
- D. The configuration is incorrect.

Correct Answer: C

QUESTION 3

A customer reports that a 10-Gb interface between a Cisco Nexus 7009 Switch and a Cisco Nexus 5548UP Switch is not passing traffic. The Nexus 7009 interface indicates up/up. The Nexus 5548UP interface indicates up/down. Which feature should you enable to help isolate the root cause?

A. CDP

B. GOLD

C. UDLD

D. DAI

E. LACP

Correct Answer: C

QUESTION 4

A customer is troubleshooting FCoE in its network. They have discovered that vFC is currently down and there is no active STP port state on the bound Ethernet interface. What should the STP port state be to correct this issue?



https://www.pass4itsure.com/642-980.html

2022 Latest pass4itsure 642-980 PDF and VCE dumps Download

- A. The bound interface should be in an STP forwarding state for the native VLAN only.
- B. The bound interface should be in an STP learning state for both the native VLAN and the member FCoE VLAN that is mapped to the active VSAN.
- C. The bound interface should be in an STP forwarding state for both the native VLAN and the member FCoE VLAN that is mapped to the active VSAN.
- D. The bound interface should be in an STP blocking state for both the native VLAN and the member FCoE VLAN that is mapped to the active VSAN.

Correct Answer: C

QUESTION 5

Which two statements are true about the OTV otvsite-identifier id command? (Choose two.)

- A. It is used to determine if there are other OTV edge devices on the local site.
- B. It is used to identify the site to other OTV sites in the network.
- C. It should be configured in addition to the otv site-vlan command.
- D. It should be configured instead of the otv site-vlan command.
- E. The value should be the same across all OTV sites.

Correct Answer: AC

642-980 Practice Test

642-980 Exam Questions

642-980 Braindumps



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.pass4itsure.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © pass4itsure, All Rights Reserved.