



# DES-1121<sup>Q&As</sup>

Specialist - Implementation Engineer PowerMax and VMAX Family  
Solutions Version 1.0

**Pass EMC DES-1121 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/des-1121.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Which service has to be manually started first when Unisphere services are down?

- A. SMASDB
- B. SYMEVENT
- C. SMAS
- D. SMI-S

Correct Answer: C

<https://www.dell.com/support/kbdoc/en-ca/000167303/powermax-vmx-all-flash-and-unisphere-for-powermax-smas-service-does-not-start-for-new-installation-of-unisphere-for-powermax-on-rhel-platform>

### QUESTION 2


DRAG DROP

A non-production environment has been created with a VMFS Datastore named TestDS and a virtual machine named TestVM. SRDF/S has been configured between two PowerMax arrays One ESXi server is connected to the R1 device and another is connected to the R2 device. The VMFS Datastore resides on the R1 device. The systems administrator wants to test the environment for disaster recovery readiness To simulate a disaster on the R1 side a graceful failover will be done. What is the correct sequence of steps on the R1 side of the test environment to perform a graceful failover?

Select and Place:

Unmount TestDS from the primary ESXi server	STEP 1
Shut down TestVM on the primary ESXi server	STEP 2
Perform a failover operation on the R1 from the local array	STEP 3
Unregister TestVM on the primary ESXi server	STEP 4

Correct Answer:

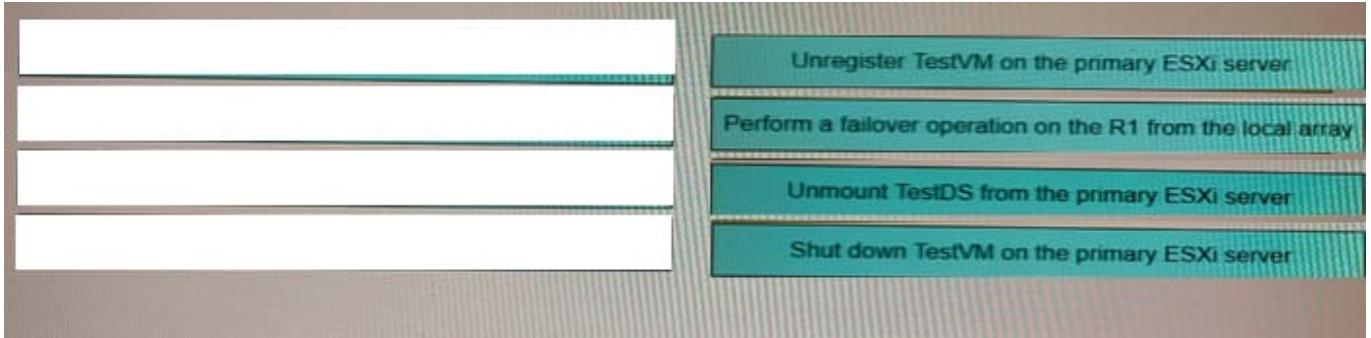

### QUESTION 3

An administrator is managing two PowerMax arrays that are located in two different data centers. The data centers are 550 km apart and are connected by a high bandwidth network link. The administrator wants to replicate data between the two arrays and achieve the lowest RPO

When using SRDF, which mode meets this requirement?

- A. Asynchronous
- B. Adaptive Copy
- C. Metro
- D. Synchronous

Correct Answer: C

### QUESTION 4

What is the maximum number of supported cascaded Storage Group levels in PowerMax and VMAX Family arrays?

- A. 1
- B. 4
- C. 16
- D. 64

Correct Answer: D

### QUESTION 5

Production work has been started on the R2 devices after an SRDF Failover operation. Where will the changes made to the R2 devices be reflected in the SRDF Query output shown in the exhibit?



Target (R2) View				Source (R1) View				MODE
Standard	ST			LI	ST			
Logical	A	T R1 Inv	R2 Inv	N	A	T R1 Inv	R2 Inv	RDF Pair
Device	Sym	E Tracks	Tracks	K Sym	Sym	E Tracks	Tracks	MACE STATE
	Dev			S Dev	Dev			
DEV001	00087	1	2	00059	3	4	S...	
DEV002	00088			0005A			S...	

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: A

[DES-1121 PDF Dumps](#)

[DES-1121 Practice Test](#)

[DES-1121 Study Guide](#)