



DNDNS-200^{Q&As}

Dell Networking Professional Exam

Pass Dell DNDNS-200 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/dndns-200.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Dell Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






QUESTION 1

On an N-Series switch, which three outputs display when a network engineer runs the command show system?
(Choose three.)

- A. Interface status
- B. OS version
- C. Unit Temperature state
- D. Fan status
- E. System name
- F. VLAN information

Correct Answer: CDE

QUESTION 2

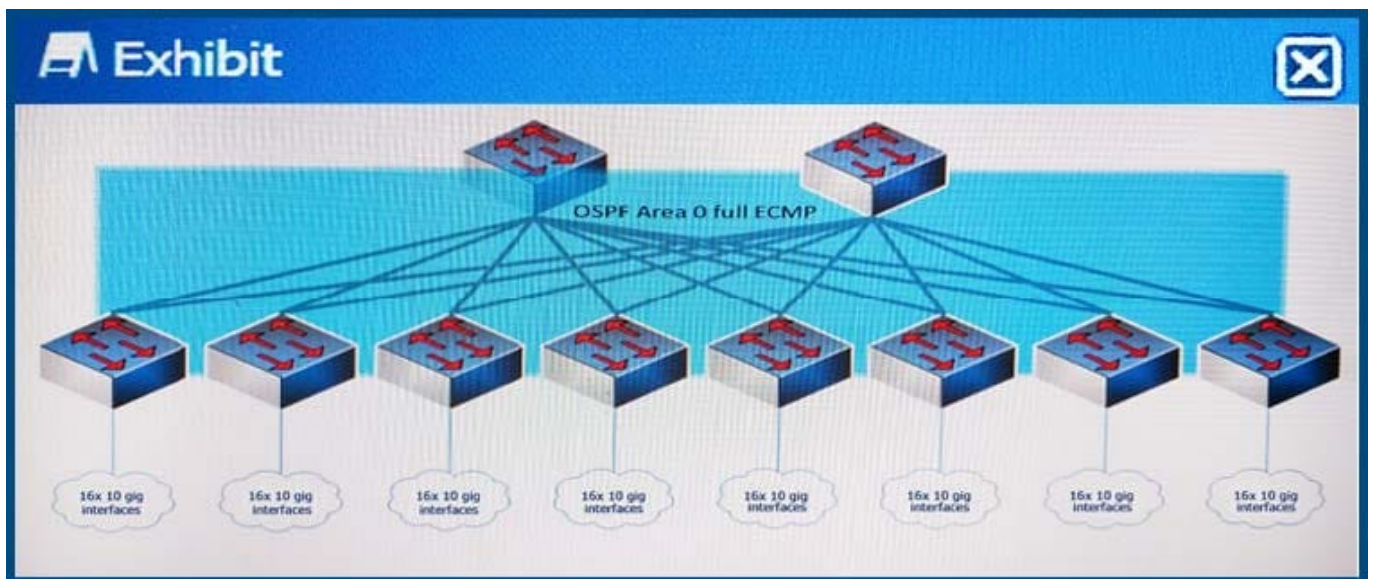

Refer to the exhibit.

A customer plans to deploy a two-tier OSPF ECMP Core in the configuration shown. All uplinks to the spine are 40Gbps. All uplinks to the leaves are 10Gbps.

What should be the oversubscription rate for the spine?

- A. 10:1
- B. 2:1
- C. 1:1



D. 4:1

Correct Answer: B

QUESTION 3

On an S-Series switch, what two events occur when a static null route has been configured in the system to drop a packet? (Choose two.)

- A. Null route is installed in the PBR table to drop the packet
- B. Null route is saved into the running configuration.
- C. Null route is installed in the ACL table with deny statement.
- D. Null route is installed in the IP forwarding table.

Correct Answer: BD

QUESTION 4


A networking engineer needs to configure several VLANs for S-Series switches for both Untagged and Tagged traffic.

Which three of the following apply? (Choose three.)

- A. A Tagged interface can only be a member of a single Tagged VLAN.
- B. A Tagged interface can be a member of multiple VLANs.
- C. Hybrid ports can be assigned to both an Untagged VLAN and Tagged VLAN.
- D. When a Tagged interface is removed from a VLAN, it will always be placed in the default VLAN as a Tagged interface.
- E. Hybrid ports can be assigned to multiple VLANs but not the default VLAN.
- F. When a Tagged interface is removed from a VLAN, it will remain Tagged only if it is Tagged in another VLAN.

Correct Answer: BCF

QUESTION 5

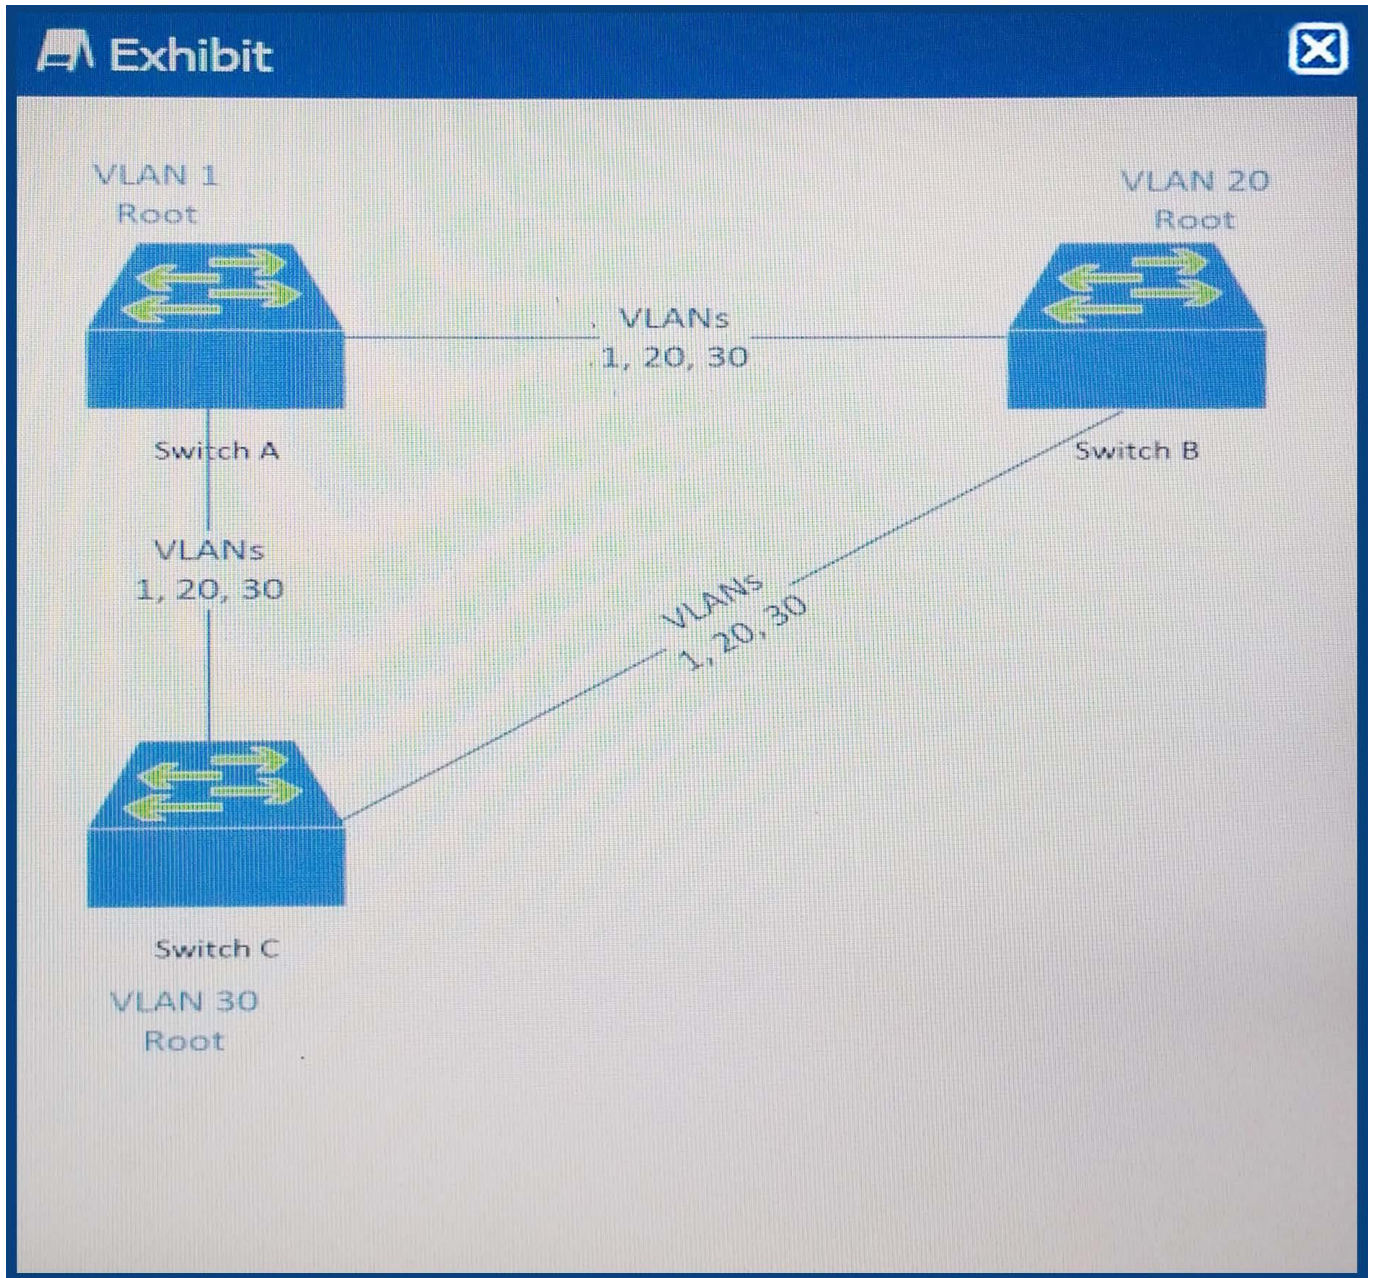

Refer to the exhibit.

The deployment engineer needs to use rapid PVST+ so that some traffic is forwarding on all inter-switch links on these three N-Series Switches. To do so, each switch has been set to the lowest spanning-tree priority value for one of the VLANs.

Given the labeled diagram shown, what Spanning-Tree Priority is Switch B advertising for VLAN 20?

- A. 4096
- B. 0
- C. 32788
- D. 4116



Correct Answer: B

[DNDNS-200 PDF Dumps](#)

[DNDNS-200 VCE Dumps](#)

[DNDNS-200 Exam
Questions](#)