



DNDNS-200^{Q&As}

Dell Networking Professional Exam

Pass Dell DNDNS-200 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/dndns-200.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Dell Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

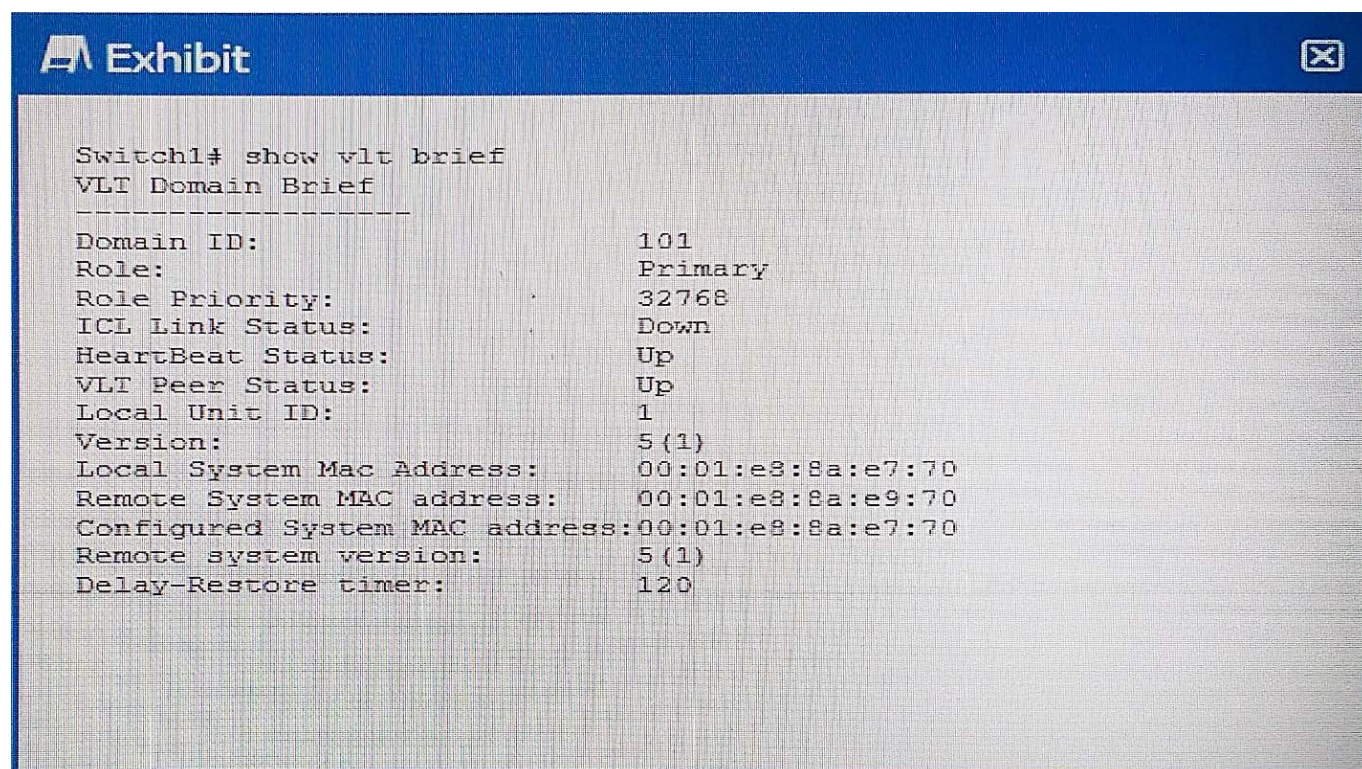

Refer to the exhibit.


Two S-Series switches have been configured as a VLT Pair.

Which three conclusions should be made based on the output shown from the first peer switch? (Choose three.)

- A. The domain ID was administratively defined during the configuration of VLT.
- B. Spanning-tree has been disabled to ensure that no VLT loops occur.
- C. The System MAC was automatically defined.
- D. The peer link is down.
- E. The restoration of VLT ports after a system has been rebooted has been automatically configured.
- F. The command back-up destination has not been applied.

Correct Answer: ACD

QUESTION 2

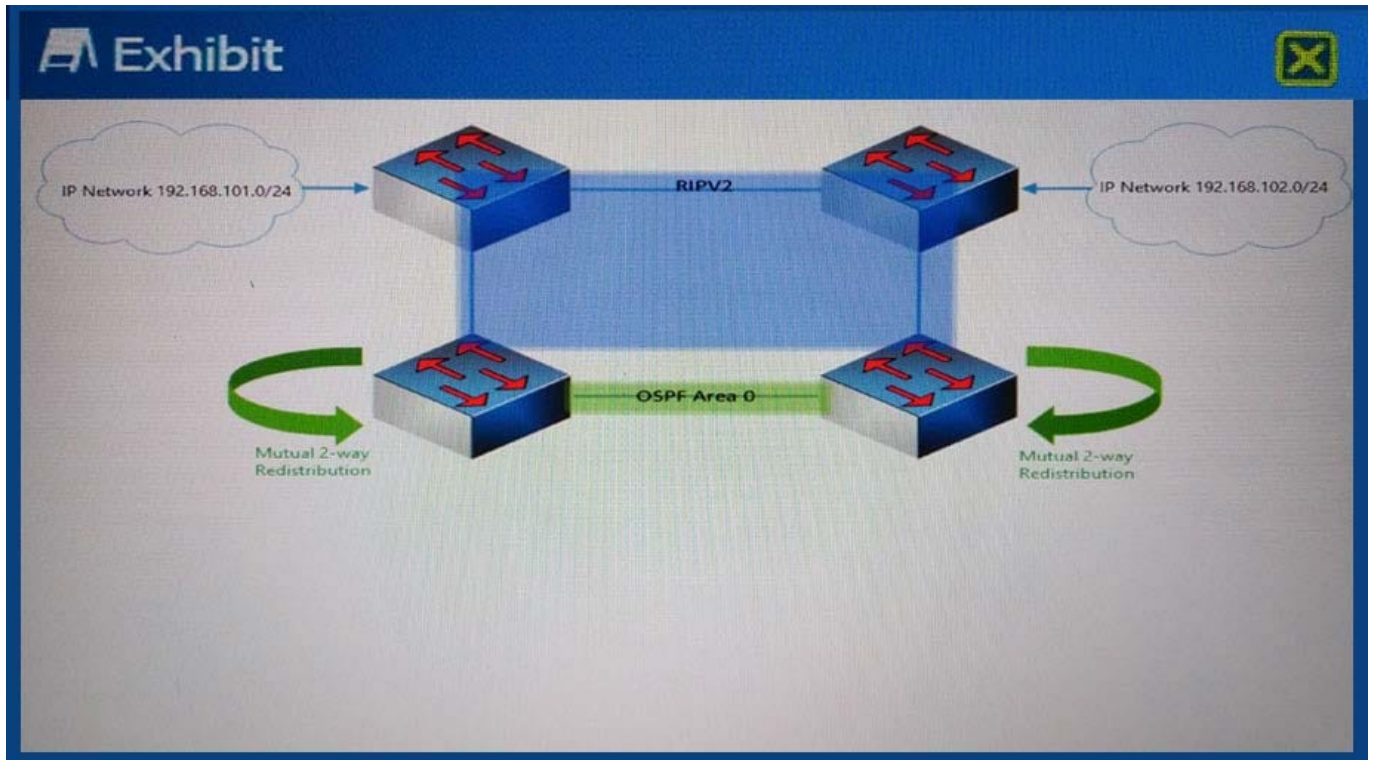

Refer to the exhibit.

Considering the network topology and information shown, what is an issue with end point devices in network 192.168.102.0/24 that try to route to 192.168.101.0/24?

- A. ICMP Redirects
- B. Suboptimal Routing
- C. Routing Loop
- D. Summarization Black Hole

Correct Answer: C

QUESTION 3

Which three components can be used to deploy 10GbE N-Series switches in a user-port stack configuration? (Choose three.)

- A. SAS Cables
- B. Standard Ethernet Cables
- C. Dedicated stacking modules
- D. TwinAx Cables
- E. Optical Transceivers



Correct Answer: ADE

QUESTION 4

Exhibit

```
console#show power inline
```

Interface	Admin	Inline Power Max / Alloc (Watts)	Inline Power Consumed (Watts)	Class	Device Type	PoE Port Priority	LLDP Support
Gi 0/46	auto	15.40 / 0.00	0.00	NO_DEVICE	-	Low	-
Gi 1/0	auto	15.40 / 0.00	0.00	NO_DEVICE	-	Low	-

Refer to the exhibit.

A customer has a C-Series chassis using a 48-port PoE+ line card. A workstation connected to Gi 0/47 passes traffic as expected. When the customer connects a PoE phone to the interface, the phone does NOT power up.

Which configuration should a network engineer set on the Gi 0/47 interface to provide power to the phone?

- A. console(conf-if-gi-0/47)#auto power inline
- B. console(conf-if-gi-0/47)#power inline on
- C. console(conf-if-gi-0/47)#power inline auto
- D. console(conf-if-gi-0/47)#power priority inline auto

Correct Answer: C

QUESTION 5

A new switch is already configured with an IP address and is reachable within the network. SSH and HTTPS are verified. The network engineer needs to disable HTTP for switch management.

What is the correct command?

- A. console# no ip https server
- B. console(config)# no ip http server
- C. console# no ip http server
- D. console(config)#ip http server disable

Correct Answer: B



VCE & PDF

Pass4itSure.com

<https://www.pass4itsure.com/dndns-200.html>

2024 Latest pass4itsure DNDNS-200 PDF and VCE dumps Download

[DNDNS-200 PDF Dumps](#)

[DNDNS-200 VCE Dumps](#)

[DNDNS-200 Practice Test](#)