



# E22-285<sup>Q&As</sup>

VxRail Appliance 4.x Deployment and Implementation Exam

## Pass EMC E22-285 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/e22-285.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

A VxRail deployment has just been completed, and the performance service is enabled, but the vSAN performance statistics are not available for the cluster or virtual machines.

What is the reason for this situation?

- A. vSAN performance hot-fix has not been applied
- B. Monitoring policy has not been created
- C. Performance service has not been manually enabled
- D. Data has not been populated

Correct Answer: B

---

**QUESTION 2**

When preparing for a VxRail deployment, which components require forward and reserve DNS records?

- A. ESXi hosts, vRealize Log Insight, and Platform Services Controller
- B. Platform Services Controller, vCenter, and ESRS/VE
- C. ESXi hosts, vCenter, and vRealize Operations
- D. ESXi Hosts, vCenter, and ESRS/VE

Correct Answer: A

---

**QUESTION 3**

In a 24 node Stretched Cluster VxRail deployment, what is the acceptable Round Trip Time (RTT) latency between sites?

- A. Primary to witness site RTT latency: 10 ms Secondary to witness site RTT latency: 10 ms Primary to secondary site RTT latency: 10 ms
- B. Primary to witness site RTT latency: 50 ms Secondary to witness site RTT latency: 50 ms Primary to secondary site RTT latency: 6 ms
- C. Primary to witness site RTT latency: 75 ms Secondary to witness site RTT latency: 75 ms Primary to secondary site RTT latency: 1 ms
- D. Primary to witness site RTT latency: 75 ms Secondary to witness site RTT latency: 150 ms Primary to secondary site RTT latency: 5 ms


Correct Answer: A

---



#### QUESTION 4

Based on the exhibit, which interfaces should be used to reset the node through the Mobile Build Server?

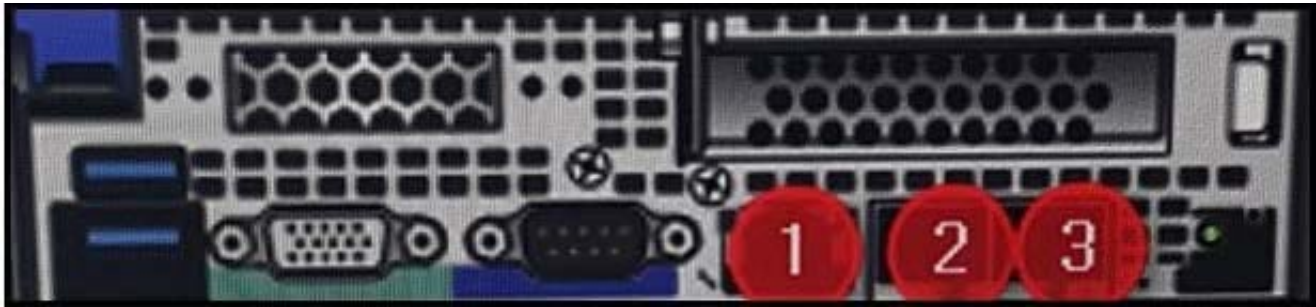

- A. 1 and 3
- B. 1 and 2
- C. 2 and 3
- D. 1, 2 and 3

Correct Answer: A

#### QUESTION 5

A company has indicated that they do not want to change the native VLAN for their entire switch. Based on best practice, how should the Top of Rack (ToR) switch be configured?

- A. Set the native VLAN on the switch ISL ports
- B. The native VLAN for the switch must be set
- C. Set the native VLAN only at the VxRail trunk ports
- D. Do not configure ToR switch native VLAN and instead tag the VLAN on VxRail

Correct Answer: A

[Latest E22-285 Dumps](#)

[E22-285 VCE Dumps](#)

[E22-285 Study Guide](#)