



H12-891^{Q&As}

HCIE-Datacom V1.0

Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/h12-891.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Router HW cannot access hosts in the remote network, router HW runs routing protocols and only pings the remote file server address 105401 on router HW with extensions through a default route remote network, the result of ping on the router HW is rendered as '\requ.\' est time out\ ', according to the above description, the error in the following analysis is?

- A. The next hop router for router HW did not reach the destination address
- B. Router HW does not have a legitimate router to reach the destination address
- C. Ping is successful, but congestion occurs on the path to the destination address
- D. There is a firewall in the remote destination network, and the destination address can be reached without releasing ICMP traffic E. ICMP packets, but the destination device fails to reply

Correct Answer: B

QUESTION 2

The following description of the GVRP interface registration mode in Huawei switches is correct?

- A. When fixed registration mode is selected, the interface cannot propagate dynamic VLANs
- B. When the normal registration mode is selected, allow the interface to dynamically register and unregister the VLAN. Logout here includes deleting dynamically learned VLANs and VLANs created natively by the administrator
- C. When the interface layer two operating mode must be hybrid
- D. GVRP when the register mode with forbidden is selected, there are four types of interface registration mode

Correct Answer: A

QUESTION 3

The multicast IP address is 2291301301, and its corresponding MAC address is :(Multilist)

- A. 01-00-5E-02-82-01
- B. 01-00-5E-82-82-01
- C. 00-00-5E-02-82-01
- D. 00-00-5E-82-82-01

Correct Answer: A

QUESTION 4




What does RT do in MPLS VPN? Multiple choice questions).

- A. Allows the peer PE to decide which VPNv4 routes to import into a particular VRF
- B. Allows peer PE to decide which VPNv4 routes not to import into a particular VRF
- C. Allows the peer CE to decide which VPNv4 routes to import into a particular VRF
- D. Allows the peer CE to decide which VPNv4 routes not to import into a particular VRF

Correct Answer: AB

QUESTION 5

As shown in the figure, private network routing information is exchanged between PE1 and PE2 and their respective CE via OSPF, and the same is configured on PE1 and PE2 Domain D. When routing is introduced from BGP to OSPF on PE2, the following limited types of LSAs may be passed to E2?

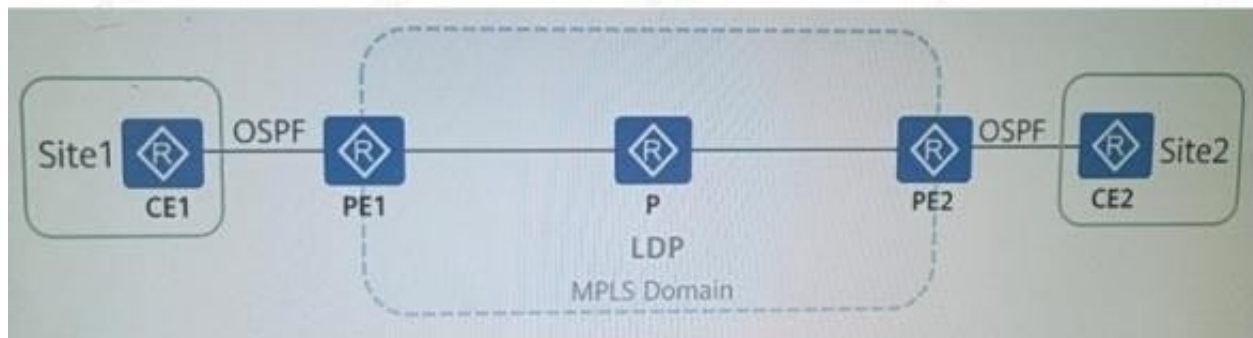

- A. Type7 LSA
- B. Type5 LSA
- C. Type3 LSA
- D. Type1 LSA

Correct Answer: CD

[H12-891 PDF Dumps](#)

[H12-891 VCE Dumps](#)

[H12-891 Study Guide](#)