

# H12-891<sup>Q&As</sup>

HCIE-Datacom V1.0

## Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/h12-891.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



### https://www.pass4itsure.com/h12-891.html

### **QUESTION 1**


Regarding the BGP ring protection mechanism, the following description is correct?

- A. A AS\_PATH attribute is used between autonomous systems to prevent ring cats.
- B. The Cluster List property is used for reflector cluster inner ring defense, and the router finds that the Cluster List of route entries contains its own Client ID The route is rejected
- C. Routes learned from IBGP are not advertised to IBGP neighbors and are used to prevent routing loops inside the AS
- D. You can use the AS CONFED SET attribute to prevent loops within a consortium:

Correct Answer: ACD

#### **QUESTION 2**

In a network, the same gigabit running S and OSPF anti-tampering and fluttering as shown in the figure, on the two border routers RTB and RTC are introduced into the wine route, the device question is to use gigabit one port strobe, , 222 The network is introduced into the OSE via impotrote direct on the RTD, assuming that all other configurations are dead default configurations, then the description of this network is wrong?

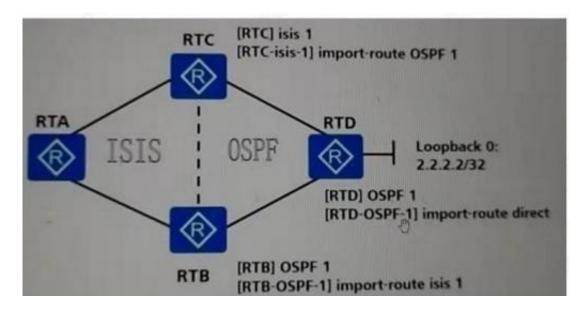

- A. Adjusting the ISIS priority to 160 on the RTB avoids suboptimal routing problems in the network.
- B. On the RTC, the following configuration is adopted, only the routes of the 2222/32 cinder segment can be filtered out when routing is introduced, IRTClip ip-prefix 10 index 1 deny2 000 8 less-equal 32
- C. RTB learns that the routing next hop for the 2222/32 network segment is RTA
- D. The following configuration can filter out the routes of the 2222/32 CIDR block of the white RTD when RTC introduces OSPF routes.

Correct Answer: B

## https://www.pass4itsure.com/h12-891.html

2024 Latest pass4itsure H12-891 PDF and VCE dumps Download

### **QUESTION 3**

The following description of the attributes of BGP is correct? (Single choice questions).

- A. The AS deficit of the adjacent AS is ranked at the far right of the list of AS Path in the BGP route entry.
- B. When the B. BGP Speaker publishes a route learned from an EBGP peer to an IBGP peer, it does not change the next hop attribute of that routing information.
- C. Local\_Pref is valid only between EBGP peers and is not advertised to third-party AS.
- D. A route can have only one community attribute value.

Correct Answer: B

#### **QUESTION 4**

There is an existing router running OSPF HWL, HW1 interface serial0 is published in zone 1, configure commands under the OSPF process nssa default-route-advertise, based on the previous description, infers which of the following options are correct?

- A. When HW1 injects a default route into Zone 1, HW1\\'s local route table can not contain a single default route
- B. HW1 injects a Type 7 default route into Zone 0
- C. HW1 injects a type 7 default route into zone 1
- D. HW1 injects a Type 3 default route into Zone 1
- E. When HW1 injects a default route into zone 1, HW1\\'s local route table needs to answer the default route

Correct Answer: CE

#### **QUESTION 5**

When you deploy BGP/MPLSIPVPN, when two VPNs have a common site, the common site must not use overlapping address spaces with the other sites of the two VPNs.

The series description for configuring static ISPs in MPLS networks is correct?

- A. When an LSR is Ingress LSR, only configure Out Label, which ranges from 16-1048575
- B. When an LSR is a Transit LSR, you need to configure both In Label and Out label, both in the range of 16-1023
- C. When an LSR is TransitLSR, you need to configure both In Label and Out Label, both of which are 161023 The Out Label ranges from 16 to 1048575
- D. When an LSR is An Egyptian LSR, only in Label needs to be configured, ranging from 16-1023

Correct Answer: BD



### https://www.pass4itsure.com/h12-891.html 2024 Latest pass4itsure H12-891 PDF and VCE dumps Download

H12-891 PDF Dumps

H12-891 Practice Test

H12-891 Study Guide