



H13-629^{Q&As}

HCIE-Storage V2.5

Pass Huawei H13-629 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/h13-629.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

True or False, N8500 volume mirroring function synchronization can be understood as a file system to do

RAID 1 to achieve image protection This protection is done in two ways:

One Species is the mirror roll between showrooms, the display level of protection, a display failure, the business is not affected; the other is the mirror image display within the exhibition.

RAID level protection, a RAID group failure, the business will not be affected.


A. True

B. False

Correct Answer: A

QUESTION 2

As shown in the figure, the main features of this backup network mode are: (Multiple Choice)

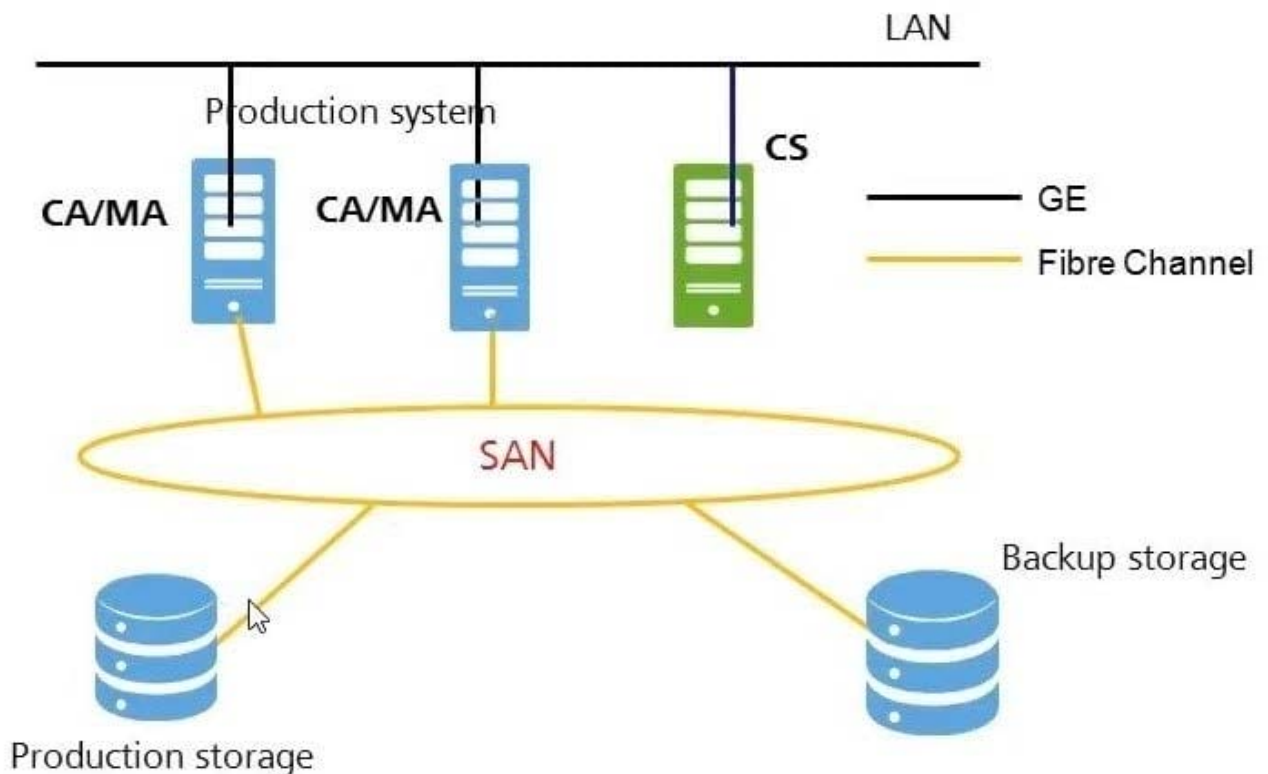

A. Backup tasks will consume a lot of LAN resources.

B. Backup tasks will consume few LAN resources.

C. Backup tasks will consume a lot of CPU resources of the production system.



D. Backup tasks will consume few CPU resources of the production system.

Correct Answer: BD

QUESTION 3

An OceanStor 18000 storage system carries the VDI service. The read/write ratio of the front-end workload is 2:8. The customer requires 20,000 IOPS to be offered. 10k rpm SAS disks (assuming that the average seek time is 3 ms) are used, and RAID 5 is configured. In this scenario, which is the minimum number of disks that must be configured for the storage system?

- A. 600
- B. 408
- C. 387
- D. 550

Correct Answer: D

QUESTION 4

In backup design, the required capacity for backup data (without deduplication) on site A is 3000GB and the required capacity for backup data (without deduplication) on site B is 1500GB. It is required to replicate the backup data from site B to site A, the deduplication ratio for replication is 3. The back-end capacity on site A should be no less than (Ignore redundancy ratio):

- A. 4500GB
- B. 3500GB
- C. 2500GB
- D. 1500GB

Correct Answer: B

QUESTION 5

In a VTL6900-I system, the backup server connected to it is the Linux operating system. The backup server and the VTL6900-I system are directly connected through the FC. The server identifies the device information as shown below. After the backup server is configured as a backup client for the VTL6900-I system and the backup VTL system on the server virtual library process, which the following operation and description is correct: (Multiple choice.)

- A. When configuring the backup client on the VTL side, you need to know that the WWPN of the FC port that connects the VTL to the VTL is available on the server in the `sys /class / fc_host` directory and subdirectory to the corresponding WWPN port.
- B. Server-side identification has been detected with the library device command is `cat / proc / scsi / scsi`.



C. As shown in the figure, among the devices identified on the server side, the device labeled 1 is the scanned library.

D. As shown in the figure, of the devices identified on the server side, the device labeled 2 is the information for the scanned tape.

Correct Answer: ABC

[Latest H13-629 Dumps](#)

[H13-629 Exam Questions](#)

[H13-629 Braindumps](#)