



HP0-Y51^{Q&As}

Building HP SDN and FlexNetwork Solutions

Pass HP HP0-Y51 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hp0-y51.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






QUESTION 1

Table of acronyms

EVI	Ethernet Virtual Interconnect
FCoE	Fibre Channel over Ethernet
L2VPN	Layer 2 Virtual Private Network
MDC	Multitenant Device Context
MPLS	Multiprotocol Label Switching
SPBM	Shortest Path Bridging MAC-in-MAC mode
TRILL	Transparent Interconnection of Lots of Links
VPLS	Virtual Private LAN Service
VPN	Virtual Private Network
LDP	Label Distribution Protocol

Refer to the exhibit.

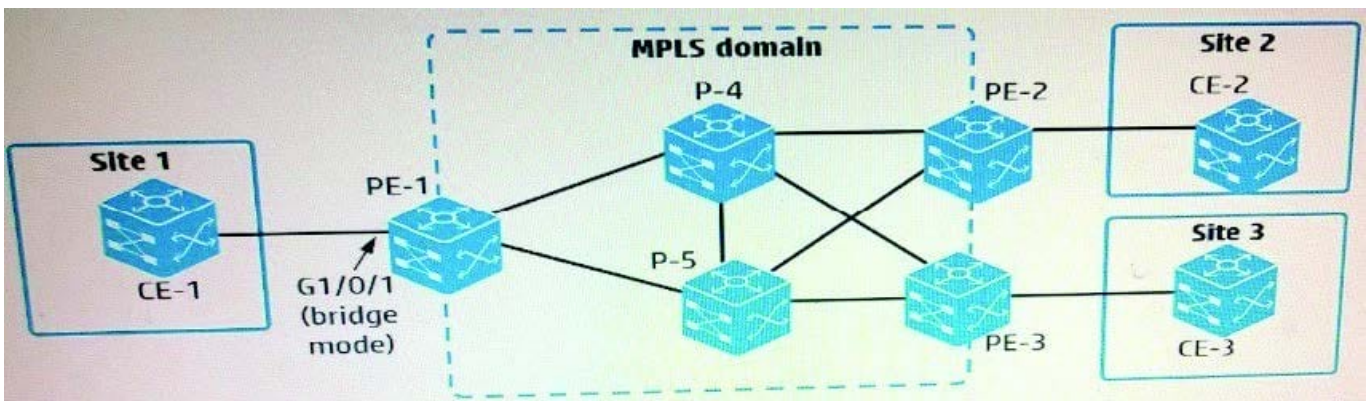

An administrator is setting up an MPLS and L2VPN virtual circuit (VC) between customer Site 1 and Site 2. The administrator is creating a global cross-connect group, which uses LDP signaling, on PE-1. Which two elements are required to do this?

- A. An AC connection (specifies a service instance on g1/0/1) and a peer (PE-2)
- B. A peer (PE-2) and a VPN instance (associated with g1/0/1)
- C. A peer (PE-2) and a VLAN ID (access VLAN or. g1/0/1)
- D. An AC connection (specifies a service instance on g1/0/1) and a VPN instance (associated with g1/0/1)

Correct Answer: CD

**QUESTION 2**

A company has an HP BYOD solution with these requirements:

Employees can connect their own devices to an Employees SSID, which enforces Wi-Fi Protected Access 2 (WPA2) with 802.1X.

User Access Manager (UAM) is the RADIUS server for 802.1X authentication, and it enforces EAP-TLS.

The employees will first connect to an open SSID, access a portal page, and download the proper certificates for completing 802.1X authentication.

To meet these requirements, an administrator needs to deploy the correct certificate templates on UAM. What determine deploy?

- A. Whether the company uses Active Directory (AD) or Open LDAP
- B. Type of endpoint devices and the device operating systems (OS)
- C. Government regulations with which the company must comply
- D. Level of security that the company requires

Correct Answer: B

QUESTION 3

Which OpenFlow use case is an example of Network Functions Virtualization (NFV)?

- A. Use OpenFlow to deploy configurations using IMC VAN SDN Manager.
- B. Use OpenFlow to implement a router on an open-vswitch.
- C. Use OpenFlow to replace the need of an snmp-agent on the switch.
- D. Use OpenFlow to implement traffic prioritization on the edge.

Correct Answer: C

QUESTION 4

Table of Acronyms



The screenshot shows a web browser window with the URL <https://ondemand.questionmark.com/delivery/per...>. The main content is a table with two columns: the first column contains abbreviations and the second column contains the full names of the protocols.

EVI	Ethernet Virtual Interconnect
FCoE	Fibre Channel over Ethernet
L2VPN	Layer 2 Virtual Private Network
MDC	Multitenant Device Context
MPLS	Multiprotocol Label Switching
SPBM	Shortest Path Bridging MAC-in-MAC mode
TRILL	Transparent Interconnection of Lots of Links
VPLS	Virtual Private LAN Service
VPN	Virtual Private Network
LDP	Label Distribution Protocol

A "Close" button is visible in the bottom right corner of the browser window.

An administrator has configured an HP Comware IRF virtual device to support FCoE in Fibre Channel Forwarder (FCF) mode. The IRF device supports VLAN 1, 10, 20, and 30.

The device requires two virtual SANs (VSANs), VSAN 1 and VSAN 2. An individual server might connect to for binding the VSANs. What is valid configuration to VLANs?

- A. VSAN 1 and VSAN 2 to VLAN 10
- B. VSAN 1 and VSAN 2 to VLAN 1; VSAN 1 to VLAN 10; VSAN 2 to VLAN 20
- C. VSAN 1 and VSAN 2 to VLAN 10; VSAN 1 and VSAN 2 to VLAN 20
- D. VSAN 1 to VLAN 10; VSAN 2 to VLAN 20

Correct Answer: D

QUESTION 5

Refer to the exhibit. (Note: the IDs in the exhibit have been truncated to simplify references to them)



```
sdn@sdnctl:~$ keystone role-list
+-----+-----+
| id | name |
+-----+-----+
| 94 | sdn-user |
| d0 | sdn-admin |
+-----+-----+

sdn@sdnctl:~$ keystone tenant-list
+-----+-----+-----+
| id | name | enabled |
+-----+-----+-----+
| 0c | sdn | True |
+-----+-----+-----+

sdn@sdnctl:~$ keystone user-list
+-----+-----+-----+-----+
| id | name | enabled | email |
+-----+-----+-----+-----+
| 1c | sdn | True | |
| 9b | rsdoc | True | |
| a6 | monitor | True | |
+-----+-----+-----+-----+
```

An administrator creates user "monitor", who should have read only access to the HP VLAN SDN Controller. The administrator needs to enter this command to

finish up the user account.

```
keystone user-add-role --user-ID ID1 --tenant-id ID2 --role-ID ID3
```

What are the correct values for ID1, ID2, and ID3?

- A. ID1 = 94; ID2 = a6; ID3=0c
- B. ID1 = a6; ID2 = 0c; ID3=94
- C. ID1 = 9b; ID2 = a6; ID3=d0
- D. ID1 = a6; ID2 = 0c; ID3=d0

Correct Answer: A



VCE & PDF

Pass4itSure.com

<https://www.pass4itsure.com/hp0-y51.html>

2024 Latest pass4itsure HP0-Y51 PDF and VCE dumps Download

[HP0-Y51 VCE Dumps](#)

[HP0-Y51 Practice Test](#)

[HP0-Y51 Braindumps](#)