



HP0-Y52^{Q&As}

Applying HP FlexNetwork Fundamentals

Pass HP HP0-Y52 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hp0-y52.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

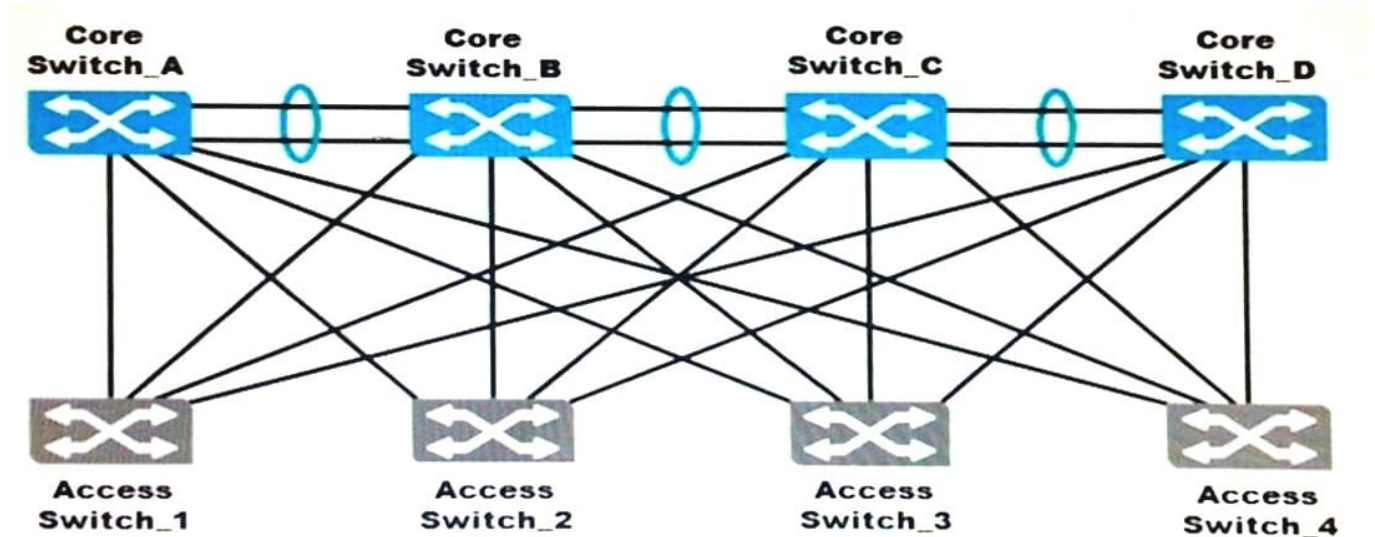

The topology shown in this exhibit implements Multiple Spanning Tree Protocol (MSTP), where all the switches are in the same region.

How many MSTP instances, besides the Internal Spanning Tree (IST) or instance 0, does this network need in order to have effective load sharing on the uplinks from the access switches?

- A. two
- B. three
- C. four
- D. five

Correct Answer: D

QUESTION 2


A customer is implementing a network using HP ProVision switches. Which default setting applies to the ProVision switches?

- A. All ports are disabled.
- B. Routing is enabled.
- C. Telnet is enabled.
- D. A static IP address is assigned to VLAN 1.

Correct Answer: C

**QUESTION 3**

Refer to Exhibit.

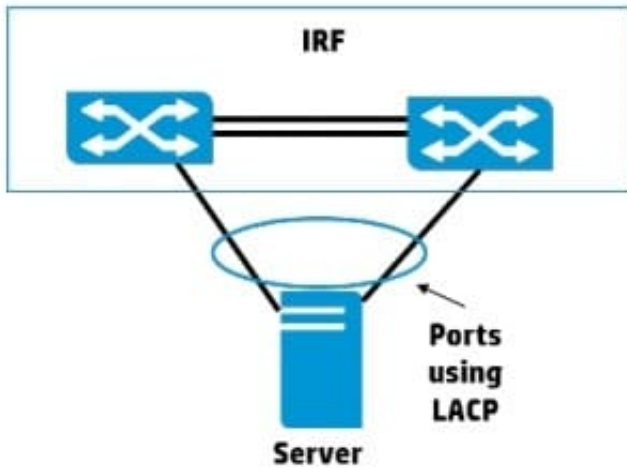


The server shown in the exhibit requires redundant links, and The link aggregation should use LACP. What should the administrator configure on the 1RF virtual switch?

- A. a bridge aggregation interface that uses static link aggregation mode
- B. a bridge aggregation interface that uses dynamic link aggregation mode
- C. two interfaces that are set to trunk for the port-link type
- D. two interfaces that are set to hybrid for the port-link type

Correct Answer: B

QUESTION 4

Refer to the exhibit.

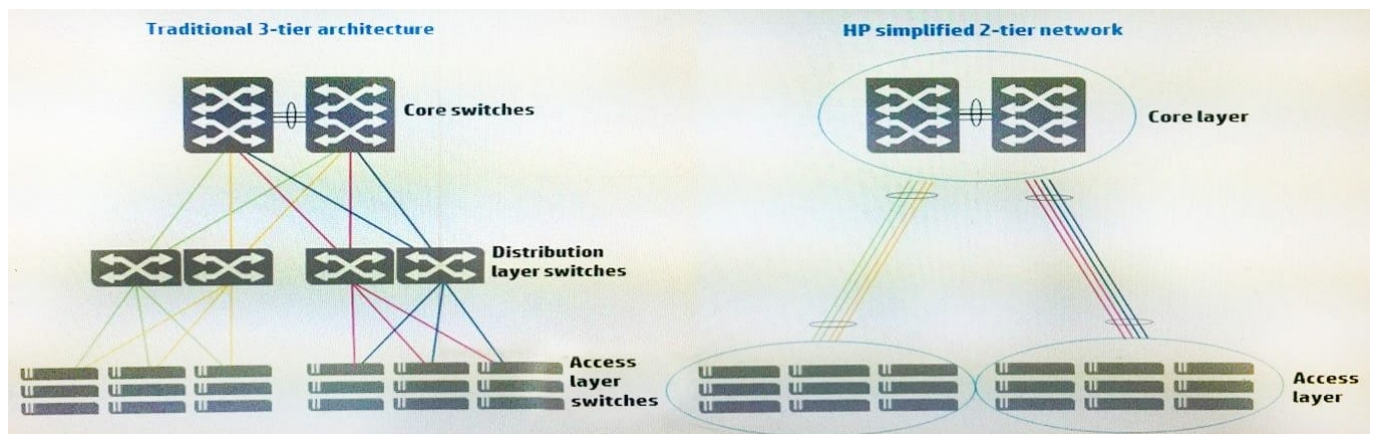



The topology shown on the left of the exhibit illustrates a traditional three-tier architecture. Which technology allows a company to simplify their network with a two-tier topology as illustrated on the right of the exhibit.

- A. Intelligent Resilient Framework
- B. Software-defined Networking
- C. Multiple Spanning Tree Protocol
- D. Equal Cost Multi-Pathing

Correct Answer: A

QUESTION 5

Refer to the exhibit.

```
[Comware] telnet server enable
[Comware] user-interface vty 0 15
[Comware-ui-vty0-15] authentication-mode password
[Comware-ui-vty0-15] set authentication password cipher password1
[Comware-ui-vty0-15] user privilege level 1
[Comware-ui-vty0-15] quit
[Comware] super authentication-mode local
[comware] super password level 3 cipher password2
```

An HP Comware switch is using its default user-interface settings. The network administrator then enters the commands shown in the exhibit. What correctly describes how an admin user must now log in?

- A. When the admin user logs in to the console port, the admin user must enter either a password of password1 or password2.
- B. When the admin user logs in using Telnet, the admin user must enter either a password of password1 or password2.
- C. When the admin logs in using Telnet, the admin user must enter a password of password1 and is given level 1 privileges.
- D. When the admin user logs in to the console port, the admin user must enter a password of password1 and is given level 3 privileges.

Correct Answer: D

[Latest HP0-Y52 Dumps](#)

[HP0-Y52 PDF Dumps](#)

[HP0-Y52 Study Guide](#)