



HP2-Z34^{Q&As}

Building HP FlexFabric Data Centers

Pass HP HP2-Z34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hp2-z34.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

What is the purpose of the nickname in TRILL switch settings?

- A. The nickname identifies the TRILL region and must match on every TRILL RBridge in the region.
- B. Administrators can use the nicknames to identify switches in CLI output.
- C. The nickname is the first factor for electing a root bridge
- D. TRILL RBridges use the nicknames as source and destination addresses in TRILL headers

Correct Answer: D

QUESTION 2

An administrator configures an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface connects to a server Converged Network Adapter (CNA) which sends normal data and storage traffic. What is the correct configuration for this port?

- A. FC port in NP mode
- B. bound to a VFC interface, which is in F mode
- C. bound to a VFC interface, which is in E mode
- D. FC port in F mode

Correct Answer: A

QUESTION 3

How does a non-hierarchical VPLS Martini solution prevent looping for broadcasts and multicasts?

- A. PEs use a hub and spoke topology, relying on the hub to distribute broadcasts and multicasts.
- B. PEs use split horizon operations, never forwarding a packet received on a pseudo wire (PW) over another PW.
- C. PEs implement Shortest Path Bridging (SPB) VLAN Mode (SPBV).
- D. PEs implement a version of Spanning Tree Protocol (STP). preferably Multiple STP (MSTP).

Correct Answer: B

QUESTION 4

HP Comware Switch 1 connects to servers with Converged Network Adapters (CNAs) that send data and FCoE storage traffic Switch 1 should forward all FCoE traffic to an upstream FCoE switch. Switch 2 which will handle all the FLOGI requests, zoning, and FC traffic forwarding.




What is the correct FCoE mode setting for Switch 1?

- A. NPV
- B. FCF
- C. disabled
- D. hybrid

Correct Answer: B

QUESTION 5

Refer to the exhibit An administrator is establishing an MPLS domain to allow communication between 10.1.0.0/16, 10.2.0.0/16, and 10.3.0.0/16. The solution will use OSPF routing and LDP. On which PE and P devices should these protocols be configured?

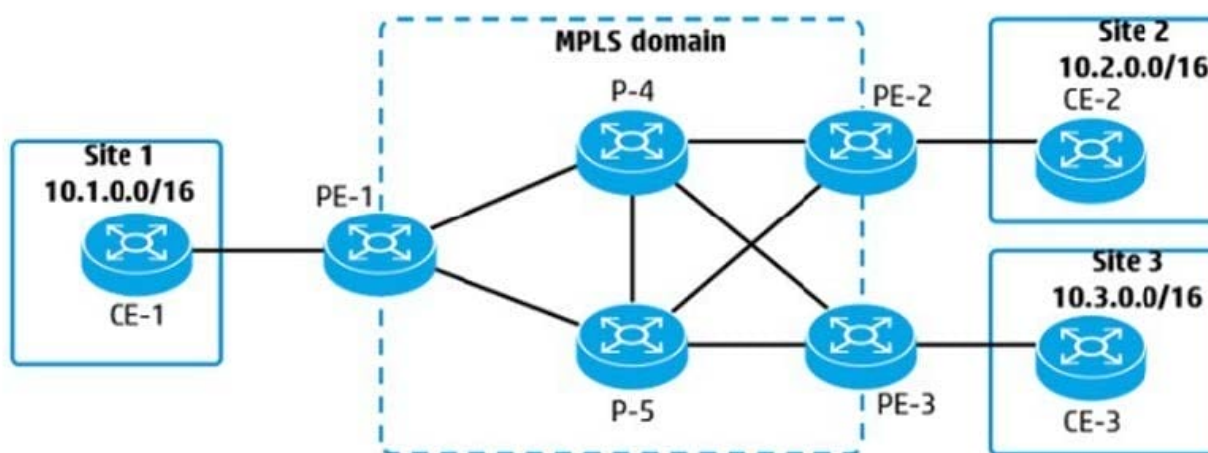

- A. All P and PE devices should be configured with MPLS, but only P devices need OSPF and only PE devices need LDP.
- B. All P and PE devices should be configured with MPLS, LDP, and OSPF.
- C. All P and PE devices should be configured with MPLS, but only PE devices need OSPF and LDP.
- D. All P and PE devices should be configured with MPLS and LDP, but only PE devices need OSPF.

Correct Answer: A

[HP2-Z34 PDF Dumps](#)

[HP2-Z34 VCE Dumps](#)

[HP2-Z34 Exam Questions](#)