



HP2-Z34^{Q&As}

Building HP FlexFabric Data Centers

Pass HP HP2-Z34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hp2-z34.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

An administrator configures an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface connects to a server FC host bus adapter (HBA). What is the correct configuration for this port?

- A. bound to a VFC interface, which is in F mode
- B. bound to a VFC interface, which is in E mode
- C. FC port >n F mode
- D. FC port in NP mode

Correct Answer: B

QUESTION 2

What is the correct use case for implementing priority flow control (PFC) on a switch port?

- A. The port carries data and storage traffic. PFC should be applied to the priority queue that is assigned to storage traffic.
- B. The port carries multimedia voice and video traffic. PFC should be applied to the queues with a lower priority than multimedia traffic.
- C. The port carries data and storage traffic. PFC should be applied to the queues with a lower priority than storage traffic.
- D. The port carries multimedia voice and video traffic. PFC should be applied to the priority queue that is assigned to multimedia traffic.

Correct Answer: C

QUESTION 3

A company is adding a second data center for disaster recovery. The data centers connect over a link supplied by a service provider with an IP network. The company wants a solution that extends Layer 2 connectivity between the data centers and does not require any special services from the service provider, such as MPLS.


What can meet the needs for this design?

- A. QEVI
- B. IRF
- C. VPLS
- D. SPBM

Correct Answer: B

**QUESTION 4**

Refer to the exhibit An administrator is setting up this data center topology to use SPBM VMs in the same subnet should be able to communicate at Layer 2 and be isolated at Layer 2 from other subnets. On which Switch 1 interfaces should the administrator enable SPBM?

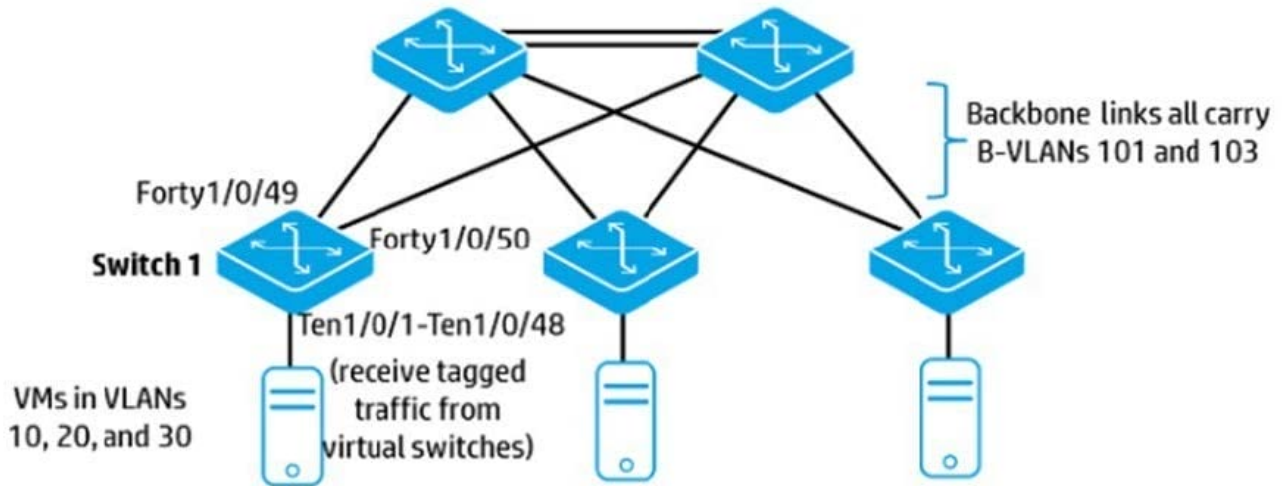

- A. interfaces Ten1/0/1-Ten1/0/48 and interfaces Forty1/0/49-1/0/750
- B. interfaces Forty 1/0/49-1/0/75 only
- C. VLAN interfaces 101 and 103
- D. VLAN interfaces 10, 20, and 30

Correct Answer: C

QUESTION 5

A multi-tenant data center with 12 tenants has the following goals:

Isolate tenants to enable each tenant to have its own routing space

Isolate the data center's services in its own routing space.

Allow for some leaking of route information among tenants and company services

Which feature should be configured on the data center routing switches?

- A. MPLS
- B. VPLS
- C. MDC
- D. Multi-VPN-Instance CE (MCE)



Correct Answer: C

[HP2-Z34 Practice Test](#)

[HP2-Z34 Study Guide](#)

[HP2-Z34 Exam Questions](#)