



HPE6-A44^{Q&As}

Scalable WLAN Design and Implementation (SWDI) 8

Pass HP HPE6-A44 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hpe6-a44.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**


When an administrator manually adds a Mobility Controller (MC) on the Mobility Master (MM) hierarchy, which parameters must be specified? (Select three.)

- A. IP address
- B. Device type
- C. MAC address
- D. Hostname
- E. Serial number

Correct Answer: ABC

QUESTION 2

Refer to the exhibit.

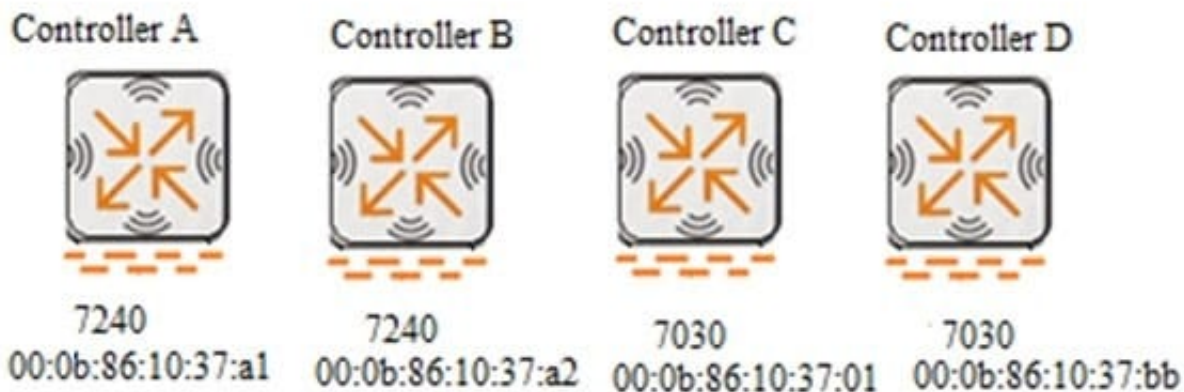

Which controller shown in the exhibit is elected as the cluster leader?

- A. Controller A
- B. Controller B
- C. Controller C
- D. Controller D

Correct Answer: B

QUESTION 3

An administrator manages an AirWave Management Platform (AMP). The AMP server receives many SNMP traps from



managed devices, but no alerts are generated on the AMP for certain critical traps.

Which rule should the administrator create to cause the AMP server to generate an alert based on receipt of a critical SNMP trap from an Aruba Mobility Controller (MC)?

- A. AMON rule
- B. SNMP trap rule
- C. Trigger rule
- D. Alert rule

Correct Answer: B

QUESTION 4

An administrator creates a cluster of four Mobility Controllers (MCs). When the administrator verifies the cluster operation, the administrator notices that it is operating as an L3-connected cluster.

What should the administrator do to ensure that the cluster operates as an L2-connected cluster? (Choose two.)

- A. Include all IP addresses in the same subnets shared by the Mobility Controllers.
- B. Exclude all VLANs that are not trunked to each Mobility Controller.
- C. Verify VLAN configuration on the switch trunks that interconnects the Mobility Controllers.
- D. Configure a separate VRRP group for each cluster member.
- E. Ensure that the controller IP addresses are in the same subnet.

Correct Answer: BE

QUESTION 5

A guest establishes an authenticated wireless session to an Aruba Mobility Controller (MC). The controller uses a ClearPass server for all AAA functions.

Which AAA component disconnects the user when the guest exceeds their allowed duration?

- A. RADIUS Change of Authorization
- B. Active Directory Session Limits
- C. RADIUS Authorization Profile
- D. SNMP Disconnect

Correct Answer: A



VCE & PDF

Pass4itSure.com

<https://www.pass4itsure.com/hpe6-a44.html>

2024 Latest pass4itsure HPE6-A44 PDF and VCE dumps Download

[Latest HPE6-A44 Dumps](#)

[HPE6-A44 PDF Dumps](#)

[HPE6-A44 Study Guide](#)