



HPE6-A75^{Q&As}

Aruba Certified Edge Professional Exam

Pass HP HPE6-A75 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/hpe6-a75.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which protocol do Mobility Controllers (MCs) use to detect a failed Mobility Master (MM)?

- A. VRRP
- B. SNMP
- C. PAPI
- D. IPSec

Correct Answer: B

QUESTION 2


What must an OSPF router do when it receives a link state update?

- A. It must participate in a new election for the Designated Router and Backup DR.
- B. It must initiate a graceful restart timer.
- C. It must re-establish adjacency with its Designated Router and Backup DR.
- D. It must run the shortest path first algorithm.

Correct Answer: D

QUESTION 3

Refer to the exhibit.

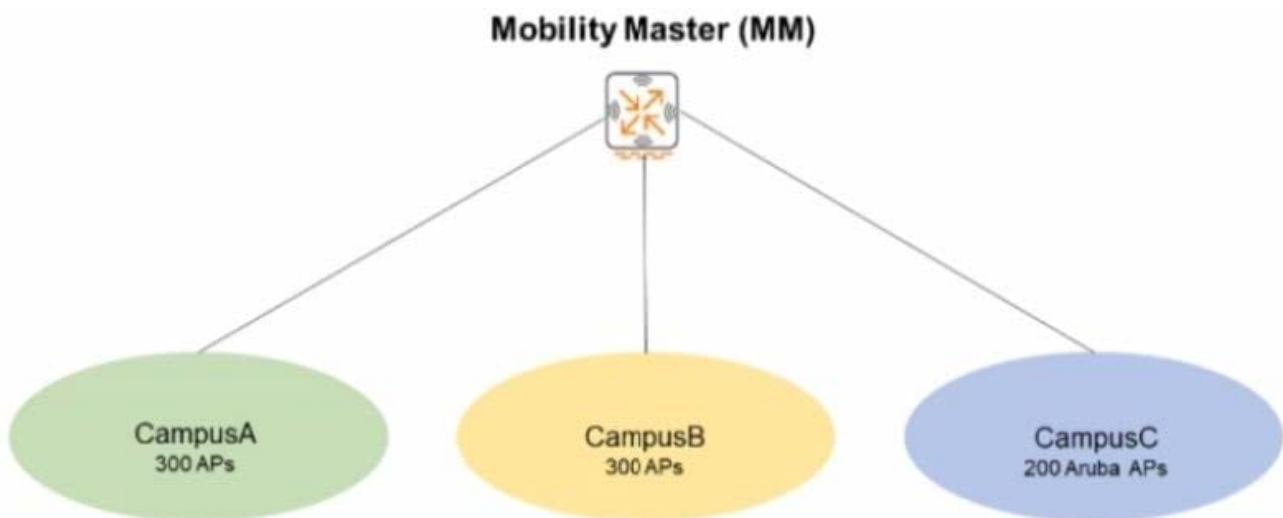



An administrator implements AP licensing on a Mobility Master (MM). Each campus is responsible to purchase its own AP licenses.

There are 900 AP licenses deployed in the global pool

There are three dedicated pools.

From the global pool, 300 AP licenses are assigned to each dedicated pool.

Network engineers at CampusA want to deploy an additional 100 APs. Currently all of the AP licenses in CampusA and CampusB are allocated, but only 200 of the AP licenses in CampusC are allocated.

What can the administrator do to add capacity for CampusA in alignment with campus policies?

- A. Allow CampusA to share from the CampusC pool.
- B. Add 100 more AP licenses and assign them to the CampusA pool.
- C. Move 100 licenses from the CampusC pool to the global pool.
- D. Add 100 more AP licenses to the global pool.

Correct Answer: B

QUESTION 4

Refer to the exhibit.

Configuration » Authentication » Sources » Add - remotelab AD

Authentication Sources - remotelab AD

Summary	General	Primary	Attributes
Specify filter queries used to fetch authentication and authorization attributes			
Filter Name	Attribute Name	Alias Name	Enabled As
1. Authentication	dn	UserDN	-
	department	Department	Role, Attribute
	title	Title	Attribute
	company	company	-
	memberOf	memberOf	Role, Attribute
	telephoneNumber	Phone	Attribute
	mail	Email	Attribute

Exhibit: accp67-312

Based on the Attribute configuration shown, which statement accurately describes the status of attribute values?

- A. Only the attribute values of department and memberOf can be used in role mapping policies.
- B. The attribute values of department, title, memberOf, telephoneNumber, and mail are directly applied as ClearPass.
- C. Only the attribute value of company can be used in role mapping policies, not the other attributes.



D. The attribute values of department and memberOf are directly applied as ClearPass roles.

E. Only the attribute values of title, telephoneNumber, and mail can be used in role mapping policies.

Correct Answer: D

QUESTION 5

OSPF is configured on an AOS-Switch, and the network administrator sets the router ID to 10.0.0.1. The administrator wants to be able to reach the switch at this ID from any location throughout the OSPF system. The administrator also needs the router ID to be stable and available, even if some links on the switch fail.

What should the administrator do?

A. Make sure that 10.0.0.1 is the IP address on the VLAN with the lowest ID.

B. Configure 10.0.0.1 on a loopback interface, and enable OSPF on that interface.

C. Configure 10.0.0.1 as a manual OSPF neighbor on each switch in the OSPF system.

D. Configure 10.0.0.1 as a secondary IP address on the switch 00BM poet.

Correct Answer: B

[HPE6-A75 PDF Dumps](#)

[HPE6-A75 VCE Dumps](#)

[HPE6-A75 Practice Test](#)