



# JN0-1302<sup>Q&As</sup>

Data Center Design Specialist (JNCDS-DC)

## Pass Juniper JN0-1302 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-1302.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

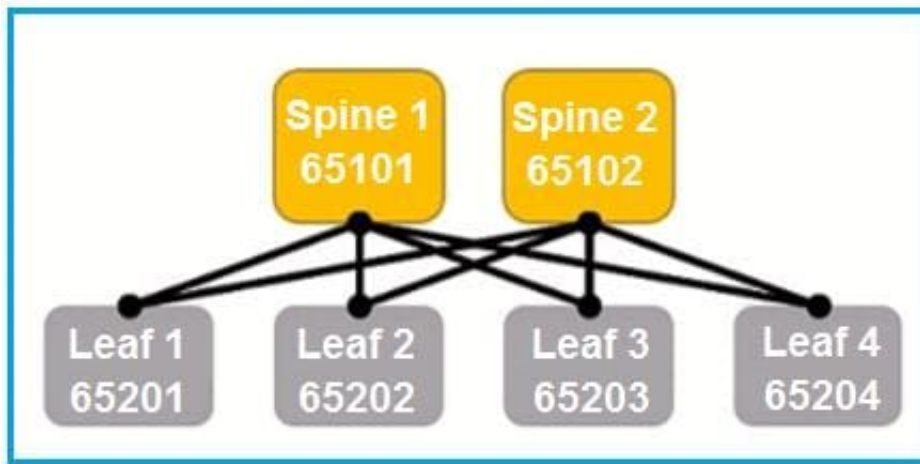

For a fully configured and functional IP fabric underlay as shown in the exhibit, how many external BGP neighbors are expected to be in established state for Leaf 1?

- A. 4
- B. 5
- C. 2
- D. 3

Correct Answer: C

---

**QUESTION 2**

You are designing a new data center that will be built using an IP fabric. One of your security requirements is that the gateway for all of your VLANs must reside on the data center SRX firewalls.

Which IP fabric architecture will satisfy this requirement?

- A. centrally routed overlay
- B. server routed overlay
- C. edge routed overlay
- D. bridged overlay

Correct Answer: C

---

**QUESTION 3**



Your company wants to expand operations and build small data centers in locations where it is difficult to maintain physical routing equipment. You must recommend a Juniper product that minimizes this issue.

Which product would you recommend in this situation?

- A. MX104
- B. vMX
- C. vRR
- D. Virtual Chassis

Correct Answer: B

---

#### QUESTION 4

You are designing an EVPN/VXLAN overlay network for your data center. You are planning on reusing some of your existing devices that do not support VXLAN routing.

Which gateway model should be deployed to support this architecture?


- A. spine gateway
- B. leaf gateway
- C. server based gateway
- D. underlay gateway

Correct Answer: A

---

#### QUESTION 5

Click the Exhibit button.

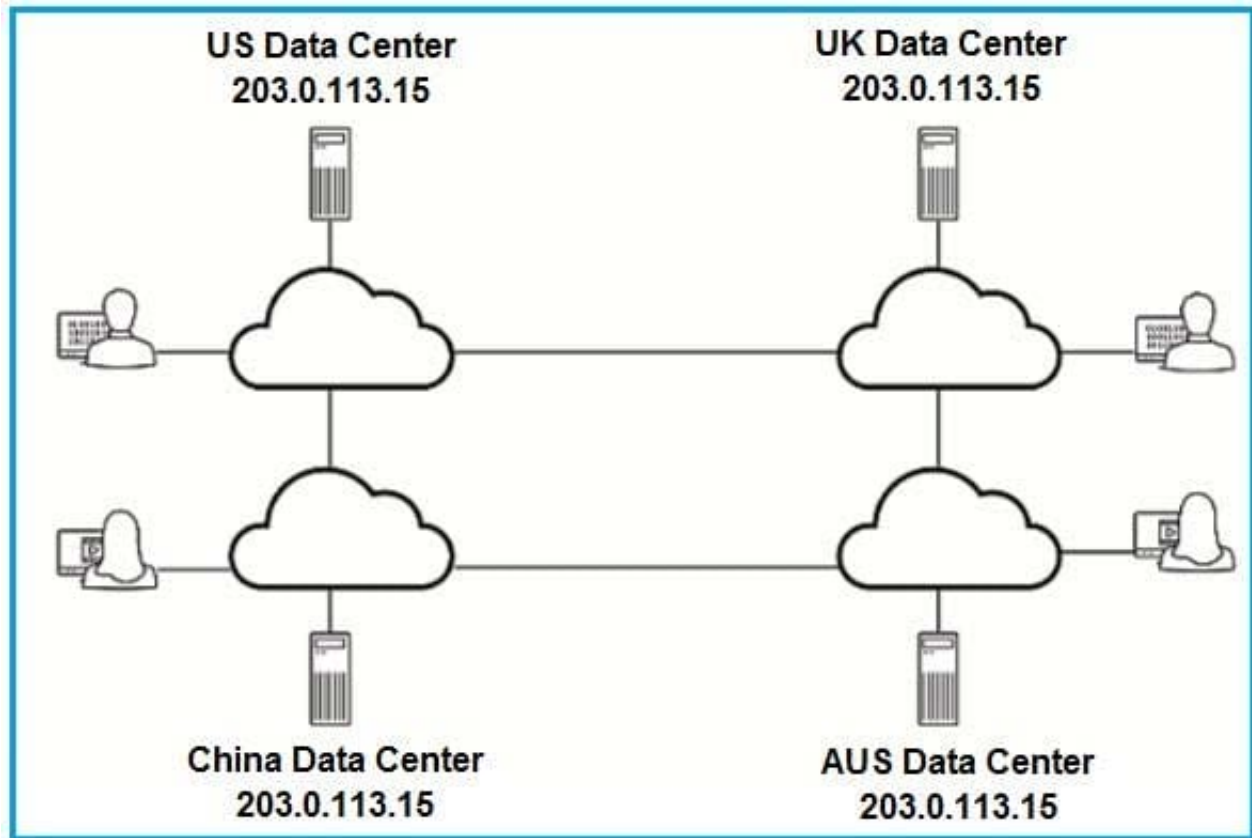

Which two statements about the redundancy design shown in the exhibit are true? (Choose two.)

- A. User traffic must be policy-routed to the active data center.
- B. Multicast IP addressing is in use.
- C. Inter-server traffic must use an alternate IP address.
- D. Anycast IP addressing is in use.

Correct Answer: CD

[JN0-1302 PDF Dumps](#)

[JN0-1302 Study Guide](#)

[JN0-1302 Braindumps](#)