



# JN0-1361<sup>Q&As</sup>

Service Provider Design Specialist (JNCDS-SP)

**Pass Juniper JN0-1361 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-1361.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Your customer is deploying a multi-tenant data center and needs help with the WAN edge design. What are two main design considerations for this environment? (Choose two)

- A. support for Virtual Chassis Control Protocol
- B. support for unified threat management
- C. support for Network Address Translation
- D. support for data collection and analysis

Correct Answer: CD

---

**QUESTION 2**

What are two ways that allow BGP route reflectors to advertise more optimal IGP next hops? (Choose two)

- A. Use BGP-ORR.
- B. Use SPRING.
- C. Implement route reflectors at each POP.
- D. Implement a centralized route reflector.

Correct Answer: AD

---

**QUESTION 3**

Your customer requires redundant routers and wants to use VRRP for the default gateway at their Internet edge. Which two statements are correct in this scenario? (Choose two)

- A. VRRP will only support two routers
- B. The VRRP master and backup send advertisements to each other at regular intervals.
- C. VRRP dynamically elects master and backup routers
- D. VRRP for IPv6 provides a much faster switchover to an alternate default router than IPv6 neighbor discovery procedures

Correct Answer: BC


---

**QUESTION 4**

Exhibit:



Referring to the exhibit, which two methods would be used by the designer of ISP E to ensure that traffic between ISP C and ISP A will traverse through ISP B? (Choose two.)

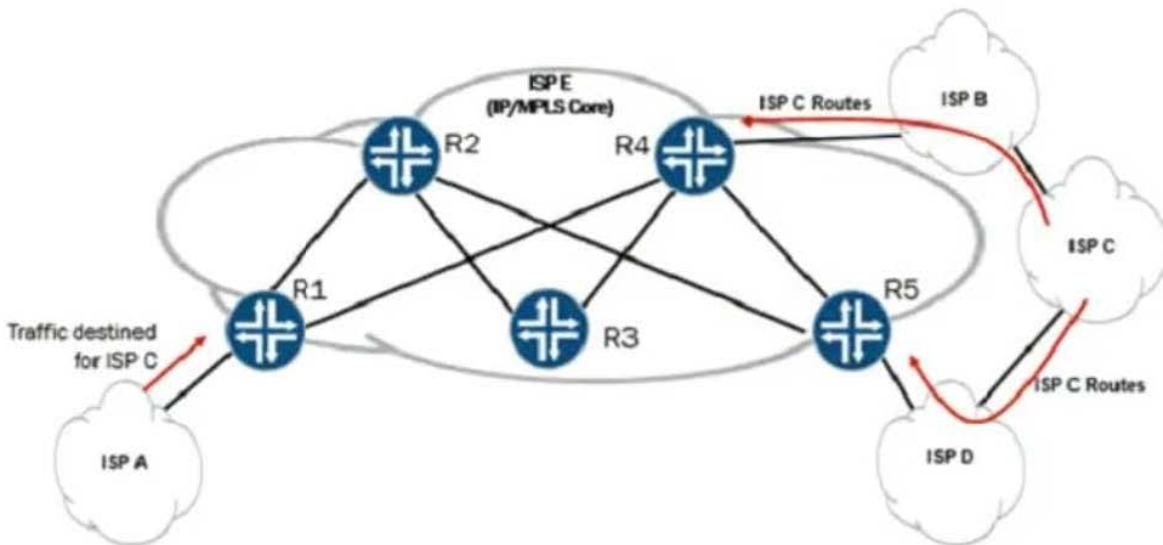

- A. Apply the BGP import policy (to EBGP peers) on R4 and/or R5 to adjust the local preference on the ISP C routes so that the path through ISP B is more preferred
- B. Apply the BGP export policy (to IBGP peers) on R4 and R5 to adjust the MED on the ISP C routes so that the path through ISP D is less preferred.
- C. Apply the BGP import policy (to EBGP peers) on R4 and R5 to modify the AS PATH attribute so that the path through ISP D is less preferred.
- D. Apply the BGP import policy (to EBGP peers) on R4 to adjust the ORIGIN for the routes received from ISP B to unknown.

Correct Answer: BC

## QUESTION 5

Your customer is paying for traffic prioritization and you must ensure that all traffic from their 172.27.10.0/24 network receives top priority through your network.

Which action will satisfy this requirement?

- A. Apply a behavior aggregate classifier to the egress interface.
- B. Apply a custom rewrite rule to the ingress interface.
- C. Apply a multifield classifier to the ingress interfaces.
- D. Apply a custom scheduler map to the ingress interface.

Correct Answer: C



We would need MF to match the address and set the forwarding class.

[Latest JN0-1361 Dumps](#)

[JN0-1361 Practice Test](#)

[JN0-1361 Braindumps](#)