



JN0-1361^{Q&As}

Service Provider Design Specialist (JNCDS-SP)

Pass Juniper JN0-1361 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-1361.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

Exhibit: You are asked to ensure that most traffic that traverses your network is load balanced over all of the equal cost links between the routers in your network. However, you must also ensure that traffic from ISP A that is destined for ISP D must traverse the R1-R2-R3-R4-R5 path. Referring to the exhibit how would you accomplish this task?

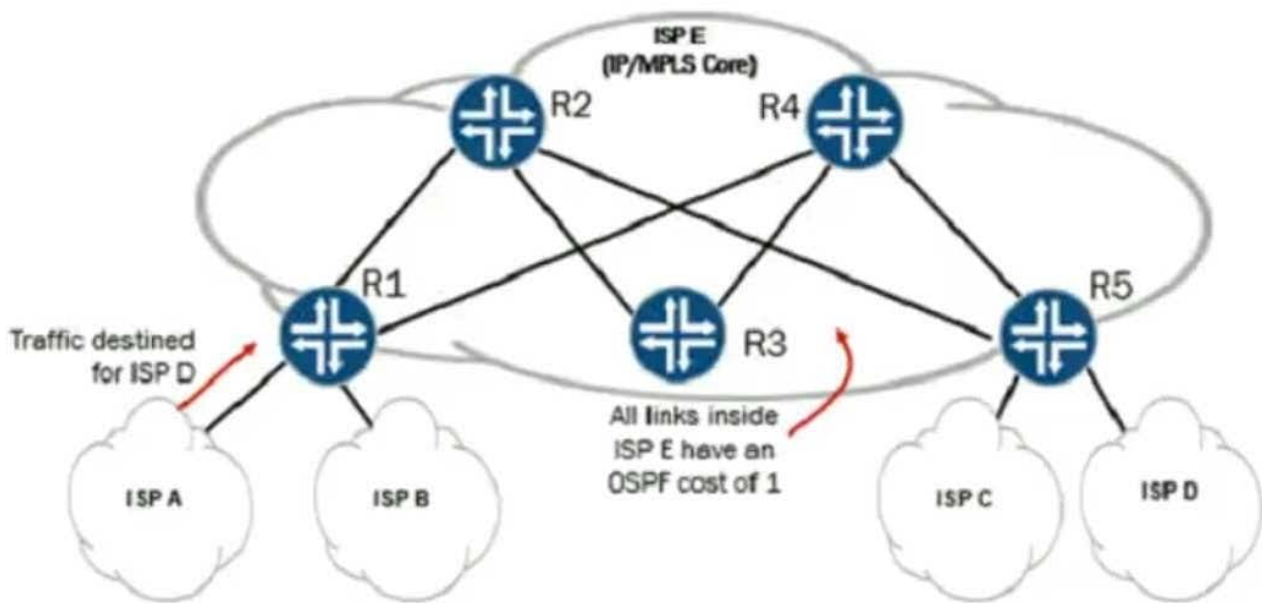

- A. Force the ISP A to ISP D traffic over RSVP-signaled LSPs.
- B. Adjust the BGFs LOCAL PREF attribute to ensure that the raw IP packets follow the required path.
- C. Adjust the OSPF metrics of each link so that the raw IP packets follow the required path.
- D. Force the ISP A to ISP D traffic over LDP-signaled LSPs.

Correct Answer: A

QUESTION 2

What are two ways that allow BGP route reflectors to advertise more optimal IGP next hops? (Choose two)

- A. Use BGP-ORR.
- B. Use SPRING.
- C. Implement route reflectors at each POP.
- D. Implement a centralized route reflector.

Correct Answer: AD

**QUESTION 3**

You work for a service provider that offers L3VPN services to its customers. While designing L3VPN solutions for customers, you sometimes need to share routes between routing instances as part of the design.

What are two reasons for sharing routes between routing-instances? (Choose two)


- A. so customers can reach the Internet
- B. to allow the service provider's OoB network to be reachable by customers
- C. so customers can reach the service provider's public cloud infrastructure
- D. to support network address translation

Correct Answer: AC

QUESTION 4

Exhibit:

Referring to the exhibit, which two methods would be used by the designer of ISP E to ensure that traffic between ISP C and ISP A will traverse through ISP B? (Choose two.)

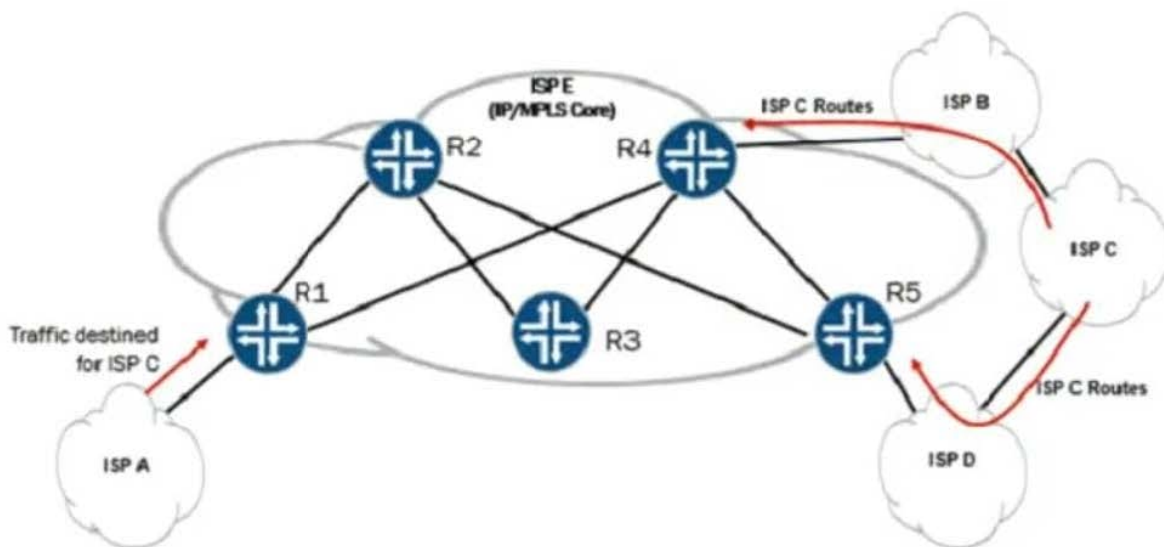

- A. Apply the BGP import policy (to EBGP peers) on R4 and/or R5 to adjust the local preference on the ISP C routes so that the path through ISP B is more preferred
- B. Apply the BGP export policy (to IBGP peers) on R4 and R5 to adjust the MED on the ISP C routes so that the path through ISP D is less preferred.
- C. Apply the BGP import policy (to EBGP peers) on R4 and R5 to modify the AS PATH attribute so that the path through ISP D is less preferred.



D. Apply the BGP import policy (to EBGP peers) on R4 to adjust the ORIGIN for the routes received from ISP B to unknown.

Correct Answer: BC

QUESTION 5

Your customer requires redundant routers and wants to use VRRP for the default gateway at their Internet edge. Which two statements are correct in this scenario? (Choose two)

- A. VRRP will only support two routers
- B. The VRRP master and backup send advertisements to each other at regular intervals.
- C. VRRP dynamically elects master and backup routers
- D. VRRP for IPv6 provides a much faster switchover to an alternate default router than IPv6 neighbor discovery procedures

Correct Answer: BC

[JN0-1361 PDF Dumps](#)

[JN0-1361 Study Guide](#)

[JN0-1361 Exam Questions](#)