



JN0-351^{Q&As}

Enterprise Routing and Switching Specialist (JNCIS-ENT)

Pass Juniper JN0-351 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-351.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

You are concerned that someone from outside the company could use an open conference room port to access the network.


Which feature should you use to address this concern?

- A. persistent MAC learning
- B. 802.1X
- C. DHCP snooping
- D. MAC limiting

Correct Answer: B

QUESTION 2

Referring to the exhibit, which two statements are correct? (Choose two.)

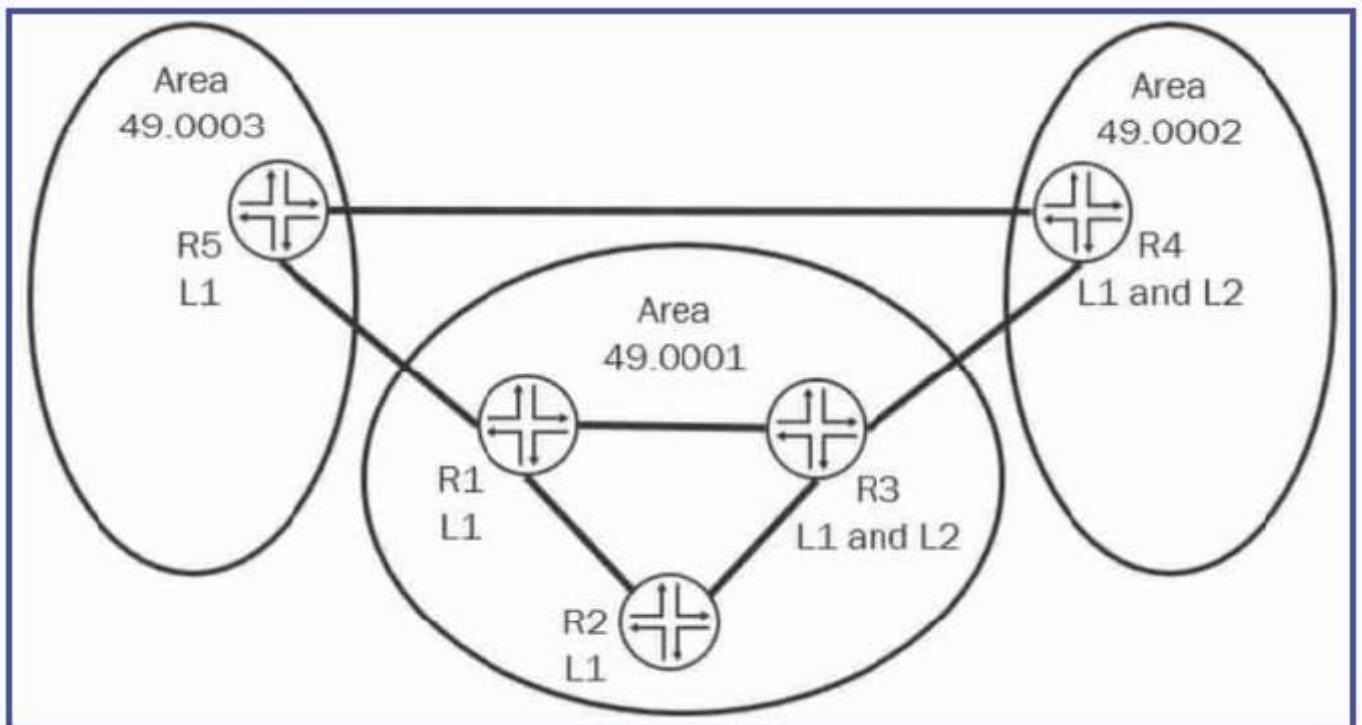

- A. R2 and R3 can form a Level 1 IS-IS adjacency.
- B. R4 and R5 can form a Level 1 IS-IS adjacency.
- C. R1 and R5 can form a Level 1 IS-IS adjacency.
- D. R3 and R4 can form a Level 2 IS-IS adjacency.



Correct Answer: AD

QUESTION 3

You notice that currently two MAC addresses are associated with a single access port in the bridge table of one of your EX Series switches.

What are two explanations for this behavior? (Choose two.)

- A. The native VLAN feature has been associated with the access port.
- B. The mac-move-limit feature has been disabled on the access port,
- C. The access port connects to an IP phone which connects to a host device
- D. The access port connects to multiple hosts through a rogue device

Correct Answer: AD

QUESTION 4

Which two statements about RSTP are correct? (Choose two.)

- A. RSTP is backward compatible with STP.
- B. RSTP permits multiple root bridges within a Layer 2 domain.
- C. RSTP permits only a single root bridge within a Layer 2 domain.
- D. RSTP is not backward compatible with STP.

Correct Answer: AC

QUESTION 5

You are troubleshooting OSPF issues on your device. You run a trace log and receive the error shown in the exhibit.



```
Apr 13 20:25:26.594363 OSPF sent Hello 10.0.1.11 -> 224.0.0.5 (ge-0/0/0.0 IFL 74 area 0.0.0.1)
Apr 13 20:25:26.594372   Version 2, length 44, ID 10.0.1.11, area 0.0.0.1
Apr 13 20:25:26.594375   mask 255.255.255.0, hello_ivl 10, opts 0x10, prio 128
Apr 13 20:25:26.594378   dead_ivl 40, DR 0.0.0.0, BDR 0.0.0.0
Apr 13 20:25:26.650504 OSPF built router LSA, area 0.0.0.1, link count 1
Apr 13 20:25:34.001413 OSPF rcvd Hello 10.0.1.1 -> 224.0.0.5 (ge-0/0/0.0 IFL 74 area 0.0.0.1)
Apr 13 20:25:34.001451   Version 2, length 44, ID 10.0.1.1, area 0.0.0.1
Apr 13 20:25:34.001454   checksum 0x0, authtype 0
Apr 13 20:25:34.001458   mask 255.255.255.0, hello_ivl 10, opts 0x12, prio 128
Apr 13 20:25:34.001461   dead_ivl 40, DR 10.0.1.1, BDR 0.0.0.0
Apr 13 20:25:34.001466 OSPF packet ignored: area stubness mismatch from 10.0.1.1 on intf ge-0/0/0.0 area
0.0.0.1
Apr 13 20:25:34.404810 OSPF periodic xmit from 10.0.1.11 to 224.0.0.5 (IFL 74 area 0.0.0.1)
Apr 13 20:25:42.446284 OSPF periodic xmit from 10.0.1.11 to 224.0.0.5 (IFL 74 area 0.0.0.1)
```

What would cause this error?

- A. missing route policy
- B. stub area mismatch
- C. MD5 authentication error
- D. subnet mismatch

Correct Answer: B

[JN0-351 PDF Dumps](#)

[JN0-351 Practice Test](#)

[JN0-351 Study Guide](#)