



JN0-363^{Q&As}

Service Provider Routing and Switching Specialist (JNCIS-SP)

Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-363.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

The segment touting SRGB start label is 10,000 and the SRGB index range is 500.


In this scenario, which two statements are correct? (Choose two.)

- A. The first usable label is 10,001.
- B. The last usable label is 10,501.
- C. The last usable label is 10,499.
- D. The first usable label is 10,000.

Correct Answer: CD

QUESTION 2

Exhibit You confirm that the R2 and R3 routers are receiving a BGP route to the 203.0.113.0/24 network, but both routers display the route as hidden. Referring to the exhibit, which two actions solve this problem? (Choose two.)

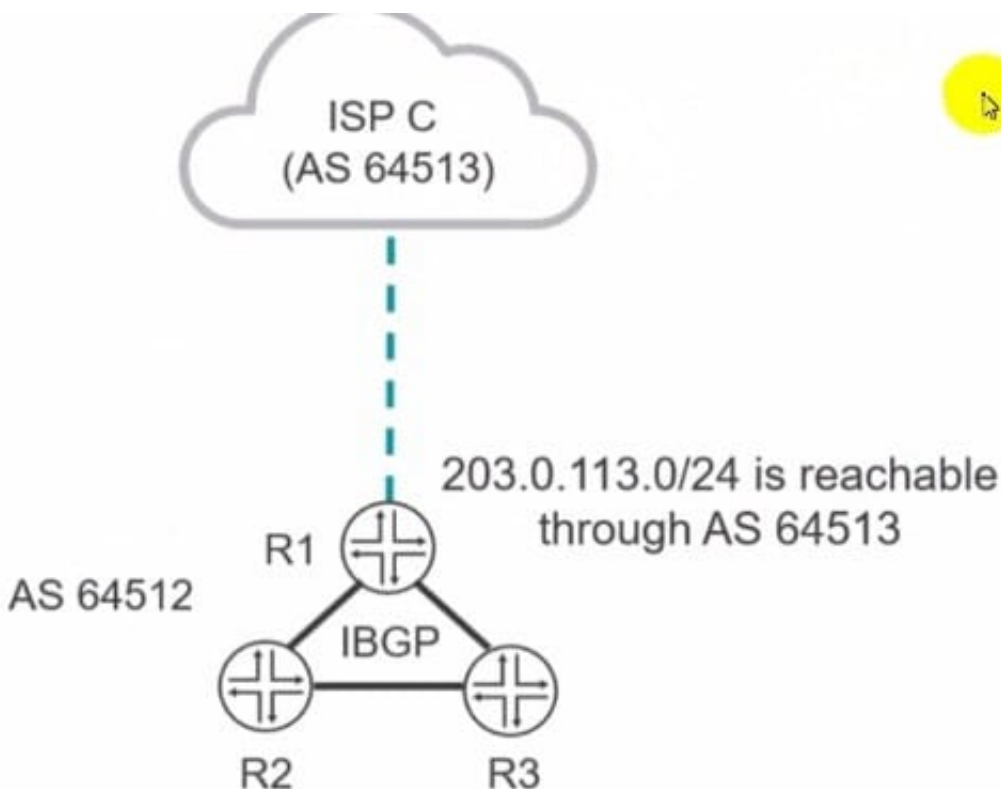

- A. Apply the routing policy on R1 as an export policy to the IBGP group.
- B. Apply the touting policy on R1 as an Import policy to the IBGP group.
- C. Configure a routing policy on R1 that sets the next hop for the 203.0.113.0/24 BGP route to the IP address that R1 uses for IBGP peering.



D. Configure a routing policy on R1 that sets the next hop for the 203.0.113.0/24 BGP route to the IP address that R1 uses for EBGP peering.

Correct Answer: CD

QUESTION 3

You are bringing a new network online with three MX Series devices enabled for STP. No root bridge priority has been configured. Which statement is true in this scenario?

- A. The device with the lowest MAC address will be elected as the root bridge.
- B. The device with the highest MAC address will be elected as the root bridge.
- C. The device with the lowest numerical lo0 IP address will be elected as the root bridge.
- D. The device with the highest numerical lo0 IP address will be elected as The bridge.

Correct Answer: A

QUESTION 4

Exhibit

```
[edit routing-options]
user@R1# show
static {
  defaults {
    preference 20;
  }
  route 0.0.0.0/0 {
    next-hop 172.24.0.1;
    preference 5;
  }
  route 172.24.0.0/24 next-hop [ 172.24.0.100 172.24.0.101 ];
forwarding-table {
  export lbgp;
}
[edit]
user@R1# show policy-options policy-statement lbgp
term 1 {
  then {
    load-balance per-packet;
  }
}
```

Which type of load balancing is shown in the exhibit?

- A. elastic load balancing



- B. per-packet load balancing
- C. per-flow load balancing
- D. network load balancing

Correct Answer: D

QUESTION 5

Interface ge-0/0/0.0 connects your network to your ISP. You want to advertise this interface address as an Internal route in OSPF without creating a neighbor with your ISP. In this scenario, how is this task accomplished?

- A. Remove interface ge-0/0/0.0 from OSPF.
- B. Create a generated route for Interface ge-0/0/0.0.
- C. Add ge-0/0/0.0 as a passive interface in OSPF.
- D. Configure a static route for Interface ge-0/0/0.0.

Correct Answer: D

[JN0-363 PDF Dumps](#)

[JN0-363 Practice Test](#)

[JN0-363 Braindumps](#)