



# JN0-662<sup>Q&As</sup>

Service Provider Routing and Switching - Professional (JNCIP-SP)

## Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-662.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

```
[edit interfaces]
user@router# show
ge-1/0/0 {
  unit 0 {
    family inet {
      filter {
        input inbound_filter;
        output outbound_filter;
      }
      policer {
        input inbound_policer;
        output outbound_policer;
      }
      address 10.10.100.1/24;
    }
  }
}
```

Referring to the exhibit, in which order will ICMP traffic be processed by the configured filters and policers for interface ge-1/0/0?

- A. input filter, input policer, output policer, output filter
- B. input policer, input filter, output policer, output filter
- C. input filter, input policer, output filter, output policer
- D. input policer, input filter, output filter, output policer

Correct Answer: D

---

**QUESTION 2**

To reduce the size of OSPF Area 100, you configure the area with the no-summaries parameter. After committing this configuration change, you notice that an OSPF router in a remote area is no longer receiving Type 5 LSAs from an ASBR in Area 100.

Which statement is true in this scenario?

- A. The ASBR in Area 100 generates Type 5 LSAs, and places them in its own database.
- B. The ASBR in Area 100 generates Type 5 LSAs, and they are translated to Type 7 LSAs.
- C. The ASBR in Area 100 generates Type 5 LSAs, and they are blocked by the ABR.



D. The ASBR in Area 100 generates Type 5 LSAs, and a virtual link is required for transport to other areas.

Correct Answer: B

---

### QUESTION 3

Which statement is correct regarding BGP route reflectors?

- A. The route reflectors must have a private AS number.
- B. The route reflectors must have an EBGP peering session between each other.
- C. The route reflectors must have a cluster ID configured.
- D. The route reflectors must have a different AS number than the clients.

Correct Answer: C

---

### QUESTION 4

Click the Exhibit button.

```
user@PE2# show
iw0 {
  unit 0 {
    encapsulation vlan-ccc;
    vlan-id 610;
    peer-unit 1;
  }
  unit 1 {
    encapsulation vlan-ccc;
    vlan-id 610;
    peer-unit 1;
  }
}
```

You have configured Layer 2 VPN stitching between two Layer 2 circuits on PE2, but traffic is not passing through the VPN.

Referring to the exhibit, what is the problem?

- A. The unit 1 peer unit must be set to 0.
- B. The VLAN IDs must be lower than 512.
- C. The VLAN IDs must be different on each unit.




D. The peer units must reference the VLAN IDs.

Correct Answer: A

### QUESTION 5

Click the Exhibit button.

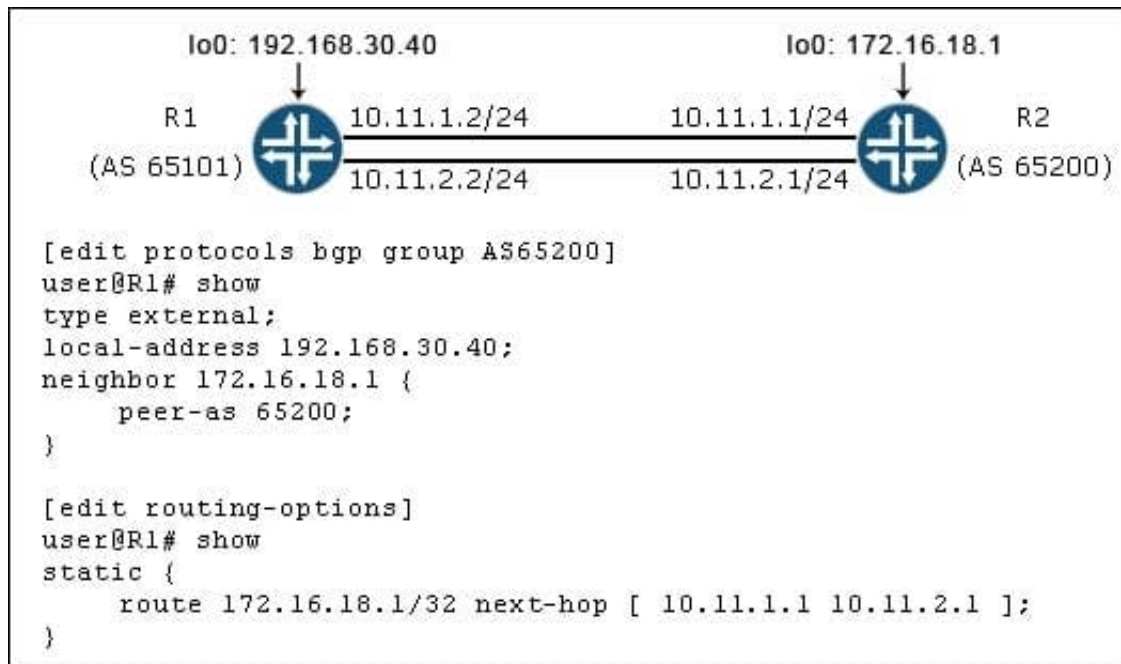

Referring to the exhibit, what must be added to the existing configuration to ensure that per-prefix load balancing occurs?

- A. multihop
- B. keep all
- C. multipath
- D. family inet unicast

Correct Answer: A

[JN0-662 PDF Dumps](#)

[JN0-662 Practice Test](#)

[JN0-662 Exam Questions](#)