



JN0-662^{Q&As}

Service Provider Routing and Switching - Professional (JNCIP-SP)

Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-662.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.



```
user@R1> show isis database detail
```

```
IS-IS level 1 Link-state database:
```

```
R1.00-00 Sequence: 0x19, Checksum: 0x3355, Lifetime: 976 secs
IP prefix: 192.168.16.4/32      Metric:      10 Internal Down
IP prefix: 192.168.16.5/32      Metric:      10 Internal Down
IP prefix: 192.168.16.6/32      Metric:      20 Internal Down
IP prefix: 192.168.16.7/32      Metric:      20 Internal Down
```

```
IS-IS level 2 link-state database:
```

```
R1.00-00 Sequence: 0x1c, Checksum: 0x3355, Lifetime: 976 secs
IS neighbor: R2.02             Metric:      10
IS neighbor: R3.02             Metric:      10
IP prefix: 10.0.0.16/30         Metric:      10 Internal Up
IP prefix: 10.0.0.20/30         Metric:      10 Internal Up
IP prefix: 192.168.16.3/32      Metric:      0 Internal Up
```

```
R2.00-00 Sequence: 0x19, Checksum: 0x3355, Lifetime: 973 secs
IS neighbor: R2.02             Metric:      10
IS neighbor: R3.03             Metric:      10
IP prefix: 10.0.0.16/30         Metric:      10 Internal Up
IP prefix: 10.0.0.24/30         Metric:      10 Internal Up
IP prefix: 192.168.16.4/32      Metric:      0 Internal Up
```

```
R2.02-00 Sequence: 0x17, Checksum: 0x3355, Lifetime: 973 secs
IS neighbor: R1.00             Metric:      0
IS neighbor: R2.00             Metric:      0
```

```
R3.00-00 Sequence: 0x12, Checksum: 0x3355, Lifetime: 973 secs
IS neighbor: R3.02             Metric:      10
IS neighbor: R3.03             Metric:      10
IP prefix: 10.0.0.20/30         Metric:      10 Internal Up
IP prefix: 10.0.0.24/30         Metric:      10 Internal Up
IP prefix: 10.0.0.28/30         Metric:      10 Internal Up
IP prefix: 10.0.0.32/30         Metric:      20 Internal Up
IP prefix: 10.0.0.36/30         Metric:      10 Internal Up
IP prefix: 192.168.16.5/32      Metric:      0 Internal Up
IP prefix: 192.168.16.6/32      Metric:      10 Internal Up
IP prefix: 192.168.16.7/32      Metric:      10 Internal Up
```

```
R3.02-00 Sequence: 0xb, Checksum: 0x3355, Lifetime: 973 secs
IS neighbor: R1.00             Metric:      0
IS neighbor: R3.00             Metric:      0
```

```
R3.03-00 Sequence: 0xb, Checksum: 0x3355, Lifetime: 973 secs
IS neighbor: R2.00             Metric:      0
IS neighbor: R3.00             Metric:      0
```

Referring to the exhibit, which statement is correct?




- A. IP address 192.168.16.5 is on a directly connected interface.
- B. Four routes have been leaked from the Level 2 area to the Level 1 area.
- C. The path to IP address 192.168.16.6 is currently unavailable.
- D. R1 has two Level 2 adjacencies and one Level 1 adjacency to other routers.

Correct Answer: A

QUESTION 2

Click the Exhibit button.

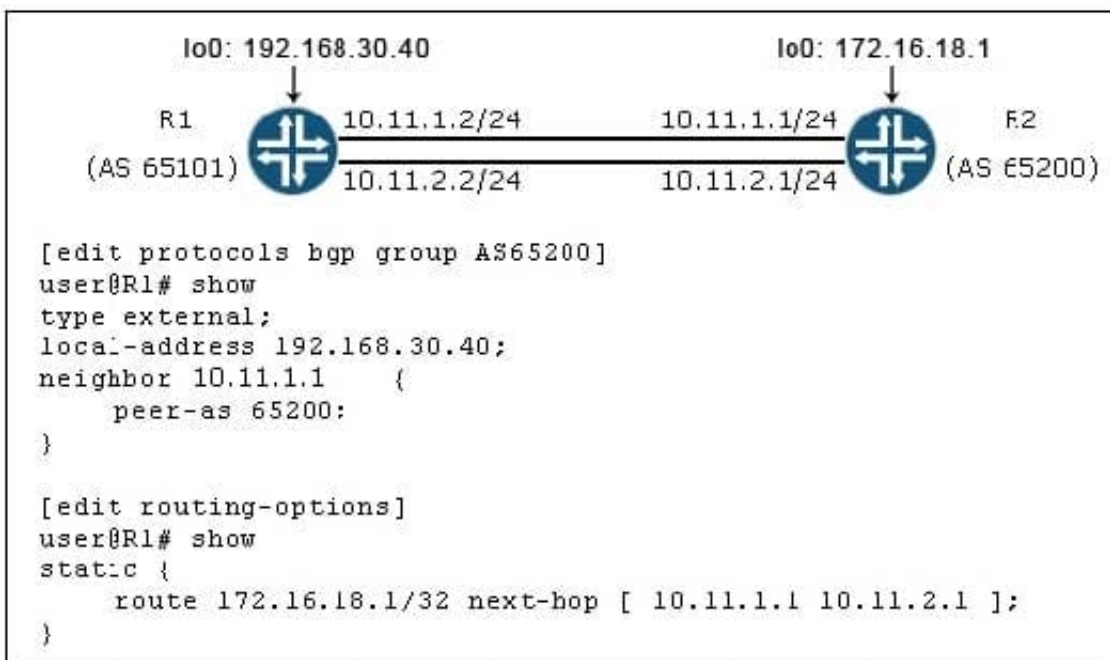

Referring to the exhibit, what must be added to the existing configuration to ensure that per-prefix load balancing occurs?

- A. multihop
- B. keep all
- C. multipath
- D. family inet unicast

Correct Answer: C

QUESTION 3

Click the Exhibit button.



```
user@R1# show routing-instances
vpn-a {
  instance-type 12vpn;
  interface ge-0/0/1.512;
  interface ge-0/0/1.513;
  route-distinguisher 192.168.1.1:1;
  vrf-import import-vpn-a;
  vrf-export export-vpn-a;
  protocols {
    12vpn {
      encapsulation-type ethernet-vlan;
      site CE-A {
        site-identifier 1;
        interface ge-0/0/1.512;
        interface ge-0/0/1.513;
      }
    }
  }
}
```

You have configured a BGP-signaled Layer 2 VPN with the configuration shown in the exhibit. Which two statements are true in this situation? (Choose two.)

- A. Remote site 1 is dual-homed.
- B. The local site is site ID 1.
- C. The route-distinguisher is in the wrong format.
- D. Interface ge-0/0/1.512 is connected to the local site

Correct Answer: AB

QUESTION 4

Click the Exhibit button.



```

      ge-0/0/1          ge-0/0/2
R1-----R2-----R3

[edit]
user@R1# show interfaces
ge-0/0/1 {
  unit 0 {
    family iso;
    family inet {
      address 192.168.6.2/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet;
    family iso {
      address 49.0001.0000.0000.0102.00;
    }
  }
}
}
```



```
[edit]
user@R2# show interfaces
ge-0/0/1 {
  unit 0 {
    family inet {
      address 192.168.6.1/30;
    }
    family iso {
      address 49.0002.0000.0000.0101.00;
    }
  }
}
ge-0/0/2 {
  unit 0 {
    family iso;
    family inet {
      address 192.168.4.1/24;
    }
  }
}
lo0 {
  unit 0 {
    family inet;
    family iso {
      address 49.0001.0000.0000.0101.00;
    }
  }
}
```



```
[edit]
user@R3# show interfaces
ge-0/0/2 {
  unit 0 {
    family iso;
    family inet {
      address 192.168.4.2/24;
    }
  }
}
lo0 {
  unit 0 {
    family inet;
    family iso {
      address 49.0001.0000.0000.0103.00;
    }
  }
}
```

Routers R1, R2, and R3 have set protocols isis interface all configured and no other set protocols isis configuration.

Referring to the exhibit, which two statements are true? (Choose two.)

- A. The R2-R3 link will form a Level 1 and Level 2 adjacency.
- B. The R1-to-R2 link will only form a Level 2 adjacency.
- C. The R1-to-R2 link will form a Level 1 and Level 2 adjacency.
- D. The R2-R3 link will only form a Level 1 adjacency.

Correct Answer: AC

QUESTION 5

Your company has multiple upstream BGP connections to the Internet through ISP-A, ISP-B, and ISP-C. You want to ensure that all traffic coming into your network uses ISP-A.

How would you accomplish this task?

- A. Change the route preference to be higher on routes being advertised to ISP-B and ISP-C.
- B. Change the local preference to be higher on routes being advertised to ISP-B and ISP-C.
- C. Prepend your AS number on routes being advertised to ISP-A.
- D. Change the local preference to be higher on routes being advertised to ISP-A.
- E. Prepend your AS number on routes being advertised to ISP-B and ISP-C.



Correct Answer: D

[JN0-662 Practice Test](#)

[JN0-662 Exam Questions](#)

[JN0-662 Braindumps](#)