



JN0-663^{Q&As}

Service Provider Routing and Switching, Professional (JNCIP-SP)

Pass Juniper JN0-663 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:


<https://www.pass4itsure.com/jn0-663.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers

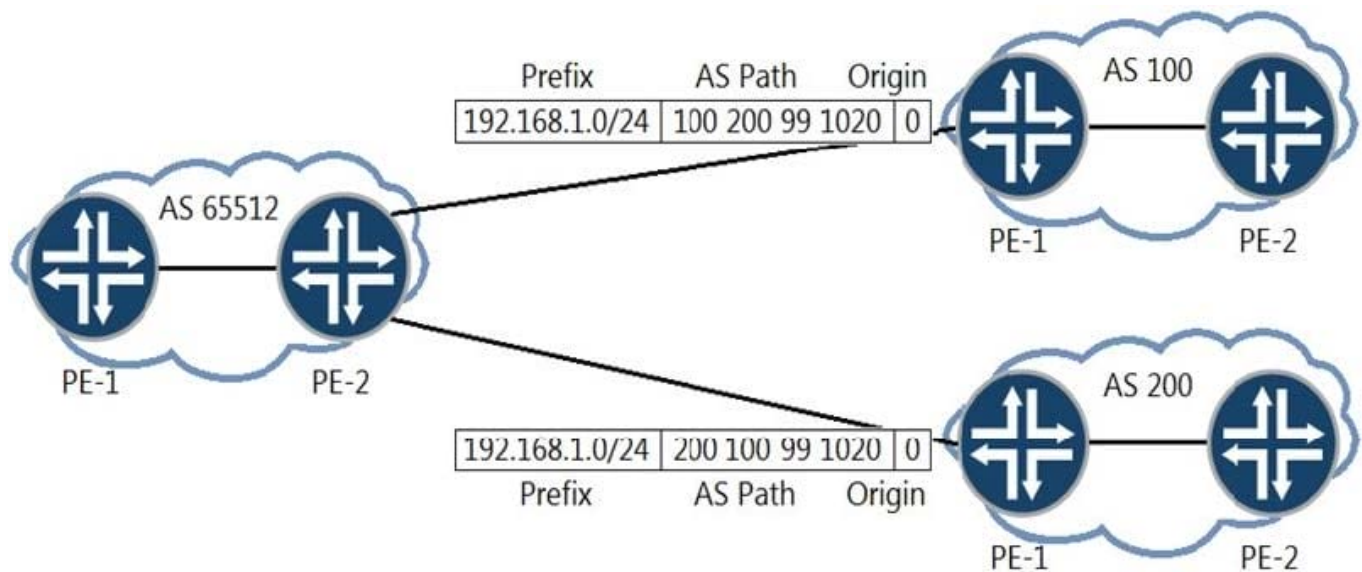

**QUESTION 1**


You are the administrator of AS 65512. You are learning the 192.168.1.0/24 prefix from both AS 100 and AS 200. You want traffic destined to the 192.168.1.0/24 prefix to exit your AS towards AS 200.

How would you accomplish this task?

- A. Configure an import routing policy on PE-2 to set a higher MED on the path learned from AS 100.
- B. Configure an import routing policy on PE-2 to modify the origin attribute on the path learned from AS 100.
- C. Configure an import routing policy on PE-2 to set a higher local preference value on the path learned from AS 200.
- D. Configure an import routing policy on PE-2 to append the AS path attribute on the path learned from AS 100.

Correct Answer: C

QUESTION 2

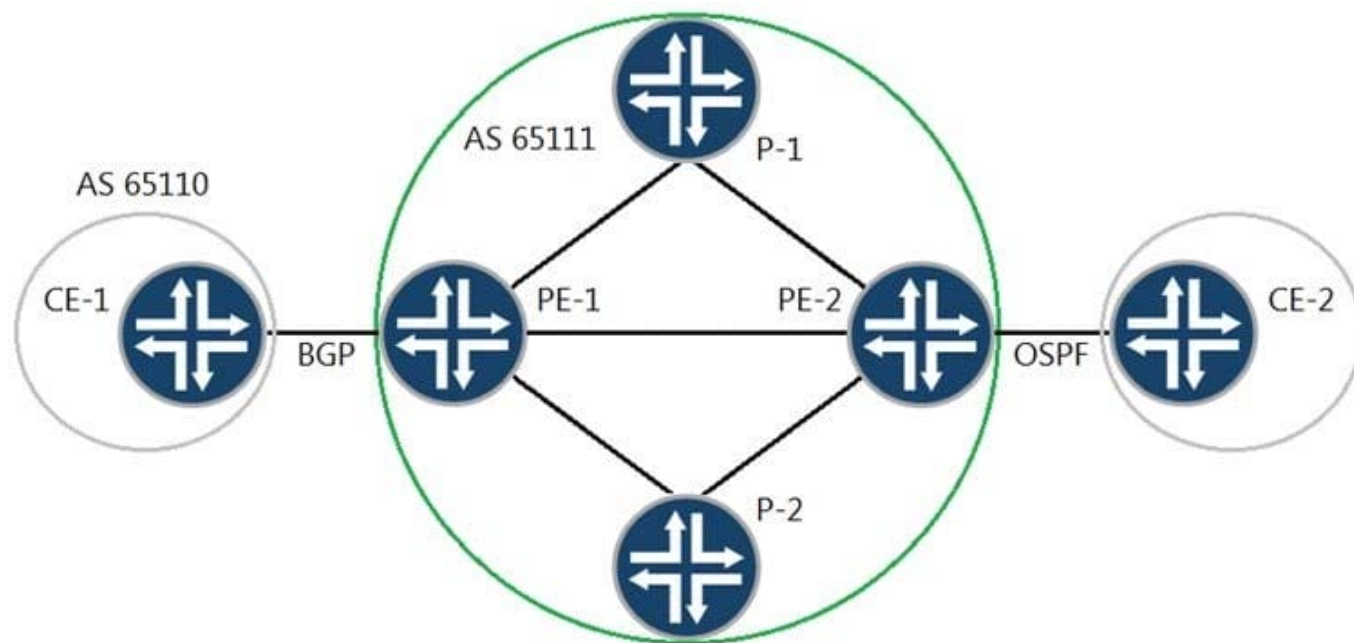

You have a Layer 3 VPN established between PE-1 and PE-2 to allow communication between CE-1 and CE-2. You want to establish communication between CE-1 and CE-2.

Referring to the exhibit, which statement is correct?

- A. You will need a BGP export policy on PE-1 to redistribute the OSPF routes, learned from PE-2, to the CE1 BGP neighbor.
- B. You will need a VRF import policy on PE-2 to advertise the OSPF routes, learned from CE-2, through the Layer 3 VPN.
- C. You will need a VRF export policy on PE-2 to redistribute the OSPF routes, learned from CE-2, through the Layer 3 VPN.
- D. You will need a VRF import policy on PE-1 to receive the OSPF routes, learned from PE-2, through the Layer 3 VPN.

Correct Answer: C

QUESTION 3

You are configuring a BGP signaled Layer 2 VPN across your MPLS enabled core network.

In this scenario, which statement is correct?

- A. This type of VPN is only supported over LSPs that are using traffic-engineering.
- B. You must use a unique route distinguisher value on all PE devices in your environment.
- C. You must ensure that all interfaces within the site's configuration are explicitly defined with their remote site identifier values.
- D. This type of VPN requires the support of the 12vpn signaling NLRI on all route reflectors and participating PE



devices.

Correct Answer: D

QUESTION 4

Which two statements are true about what a route reflector does by default when distributing routes it has received from reflector clients? (Choose two.)

- A. It does not change any received BGP attributes.
- B. It changes the default BGP attributes to inform peers that it is a route reflector.
- C. It sets the next hop of all routes to "self" to prevent routing loops.
- D. It adds its cluster ID to the client-received routes.

Correct Answer: AD

QUESTION 5

What occurs when a router running IS-IS receives an LSP with the overload bit set?

- A. The LSP is ignored during SPF calculation.
- B. The LSP is not added to the link-state database.
- C. The LSP's metric will be set to 65535.
- D. The LSP's metric will be set to 16777215.

Correct Answer: D

[JN0-663 VCE Dumps](#)

[JN0-663 Study Guide](#)

[JN0-663 Exam Questions](#)