



JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-682.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

You are asked to implement a monitoring and telemetry solution for the QFX Series devices in your IP fabric that uses a push model to collect both system event data and statistical data for your QFX Series devices.

Which technology satisfies your requirements?

- A. JunosXMLAPI
- B. REST API
- C. SNMP
- D. Junos Telemetry Interface

Correct Answer: D

QUESTION 2

Referring to the exhibit, which two statements are correct? (Choose two.)

```
[master:0]
user@leaf1> show mac-vrf forwarding vxlan-tunnel-end-point remote
Logical System Name      Id  SVTEP-IP      IFL  L3-Id  SVTEP-Mode  ELF-SVTEP-IP
cdefault>               0   192.168.100.11 100.0  0
RVTEP-IP                L3-RTT      IFL-Id  Interface  NH-Id  RVTEP-Mode  ELF-IP
Flags:
192.168.100.11  mac-vfr110410-vlan-aware 575      vtep.32769  1767  RNVE
VNI:
50310          0.0.0.0
50410          0.0.0.0
```

- A. The local leaf is using the 192.168.100.102 IP address as the local anchor point of the VTEP tunnel.
- B. The remote leaf is using the 192.168.100.102 IP address as the local anchor point of the VTEP tunnel.
- C. The remote leaf is using the 192.168.100.101 IP address as the local anchor point of the VTEP tunnel.
- D. The local leaf is using the 192.168.100.101 IP address as the local anchor point of the VTEP tunnel.

Correct Answer: AC



QUESTION 3

You are configuring an MX Series router to act as a Layer 3 gateway to route traffic between VXLANs in different data centers across a WAN connection. In this scenario, what must you do to enable this communication?

- A. Configure route reflectors.
- B. Change the UDP port used by the VXLANs.
- C. Configure the IRB interfaces to connect the VXLANs.
- D. Enable PIM on all interfaces.

Correct Answer: C

QUESTION 4


What are two streaming data formats supported for network analytics? (Choose two.)

- A. GPB
- B. XML
- C. JSON
- D. SLAX

Correct Answer: AC

QUESTION 5

You have deployed a VXLAN as shown in the exhibit Leaf1, leaf3, spine1, and spine2 have been configured as VTEPs. Host1 cannot communicate with host2.

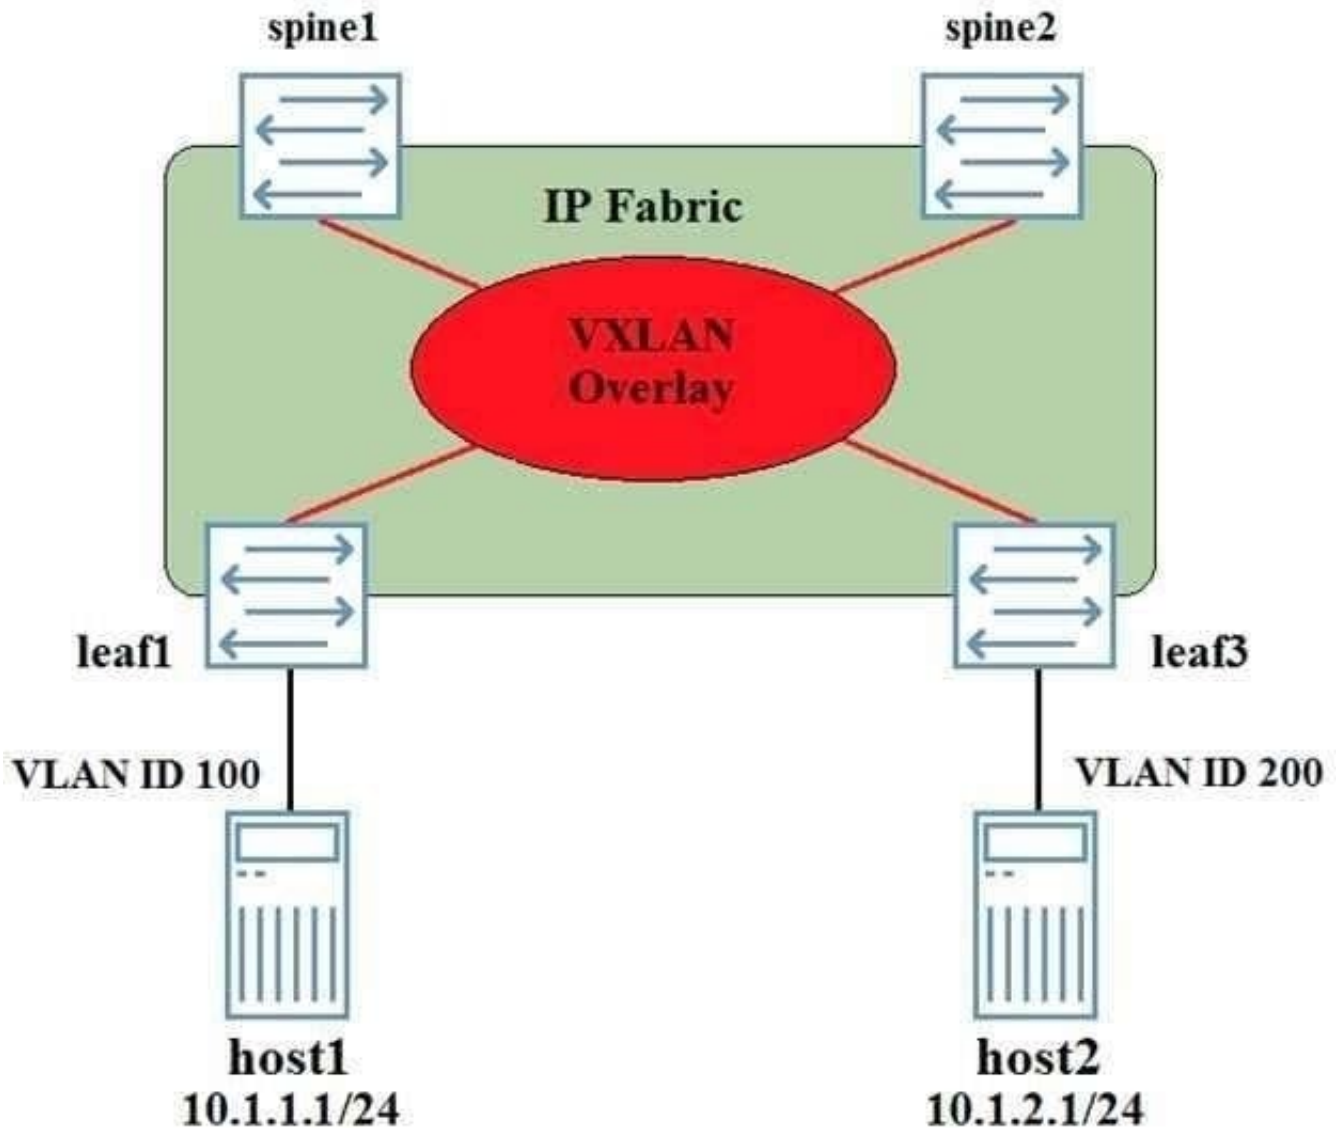

Referring to the exhibit, how would you solve this problem?

- A. The VLAN ID on the connected to host2 must be changed to VLAN 100
- B. A DCI connected must be created between the VLANs
- C. Host1 and host2 must be placed in the same VRF
- D. A layer 3 VXLAN gateway must be configured on at least on at least one of the devices

Correct Answer: D

[Latest JN0-682 Dumps](#)

[JN0-682 Study Guide](#)

[JN0-682 Braindumps](#)