

JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/jn0-682.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.pass4itsure.com/jn0-682.html

2024 Latest pass4itsure JN0-682 PDF and VCE dumps Download

QUESTION 1

Referring to the exhibit, you must advertise the lo0.12 interface as a type-5 route.

Which configuration parameter would be used to accomplish this task?

- A. Configure auto-export under the routing instance.
- B. Configure a vrf-export policy to advertise the interface route under the routing instance.
- C. Configure an export policy to advertise the interface route under protocols evpn.
- D. Configure vrf-table-label under the routing instance.

Correct Answer: C

QUESTION 2

You have configured MP-IBGP to support EVPN for your overlay network. However, you are not seeing the expected routes on your edge devices.



Peer: 10.255.14.182+179 AS 69 Local:

10.255.14.176+2131 AS 69

Type: Internal State: Established Flags:

<ImportEval>

Last State: OpenConfirm Last Event:

RecvKeepAlive

Last Error: None

Options: < Preference Local Address HoldTime

GracefulRestart AddressFamily Rib-group

Refresh>

Address families configured: inet-vpn-unicast evpn

Local Address: 10.255.14.176 Holdtime: 90

Preference: 170

Number of flaps: 0

Peer ID: 10.255.14.182 Local ID:

10.255.14.176 Active Holdtime: 90

Keepalive Interval: 30

NLRI for restart configured on peer: inet-vpnunicast 12vpn

NLRI advertised by peer: inet-vpn-unicast

12 vpn

NLRI for this session: inet-vpn-unicast

Peer supports Refresh capability (2)

Restart time configured on the peer: 120

Stale routes from peer are kept for: 300

Restart time requested by this peer: 120

Referring to the exhibit, how would you solve this problem?

A. The family evpn signaling parameter must be configured on the remote peer.

- B. Graceful restart must be disabled for this session
- C. The family 12vpn signaling must be configured on the local peer
- D. The group types on both devices should be set to external

Correct Answer: A

QUESTION 3

https://www.pass4itsure.com/jn0-682.html

2024 Latest pass4itsure JN0-682 PDF and VCE dumps Download


You are implementing perimeter security for your data center. You need to inspect all traffic Layer 7 and ensure the failure of a port or device will not result in an interruption to traffic flows. In this scenario, which design would satisfy these requirements?

- A. MX with MC LAG
- B. QFX Virtual Chassis
- C. SRX Chassis cluster
- D. SRX using LAG

Correct Answer: C

QUESTION 4

Referring to the exhibit,

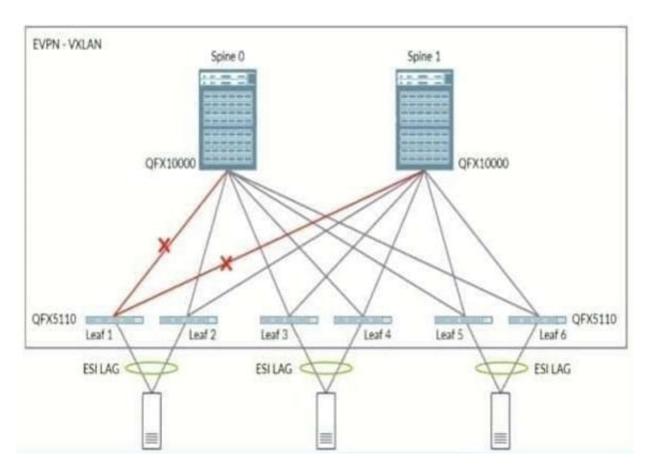

what effect does EVPN core isolation have?

- A. Leaf 1 will send a pause frame to each connected host.
- B. Leaf 1 will place the interfaces to connected hosts into LACP passive mode.
- C. Leaf 1 will take down all revenue interfaces.



https://www.pass4itsure.com/jn0-682.html

2024 Latest pass4itsure JN0-682 PDF and VCE dumps Download

D. Spine 1 will block all traffic.

Correct Answer: C

QUESTION 5

After configuring an IP fabric using EBGP as you protocol, you notice that not all of the routers are showing up in the routing tables. You have verified that all adjacencies have formed, and place and configured properly. In this scenario, which statement is true?

- A. The routers have not been configured with the multipath multiple-as parameter.
- B. The routers have not been configured using the bfd-1 Liveness-detection parameter.
- C. The routers have not been configured using the multihop parameter.
- D. The routers have not been configured using the add-path parameter

Correct Answer: A

JN0-682 Practice Test

JN0-682 Study Guide

JN0-682 Braindumps