



# JN0-740<sup>Q&As</sup>

ACX, Specialist (JNCIS-ACX)

## Pass Juniper JN0-740 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-740.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Your VPN is failing during Phase 2 communication. You check your local event log and do not see anything to indicate why the failure occurred. What action should be taken to fix the problem?

- A. View the event log of the destination gateway
- B. Configure the peer-id on your local IKE gateway
- C. Delete the remote NetScreen configuration and rebuild it correctly
- D. Run Debug on the local NetScreen to view the error output in the log

Correct Answer: A

---

**QUESTION 2**

What type of interface is a tunnel interface?

- A. sub-interface
- B. virtual interface
- C. physical interface
- D. redundant interface

Correct Answer: B

---

**QUESTION 3**

Assuming factory default settings, which statement describes the minimum requirements for WebUI management access?


- A. Connect a PC addressed on the 192.168.1.0 subnet to any interface, open a browser and access 192.168.1.1
- B. Terminate the bootup sequence from the console device, open a browser on the console device and access 192.168.1.1
- C. Connect a PC addressed on the 192.168.1.0 subnet to the product-specific interface for the device, open a browser and access 192.168.1.1
- D. Using the CLI, define an IP address on a physical interface, connect a PC to the interface and open a browser to the interface address.

Correct Answer: C

---

**QUESTION 4**

-- Exhibit -

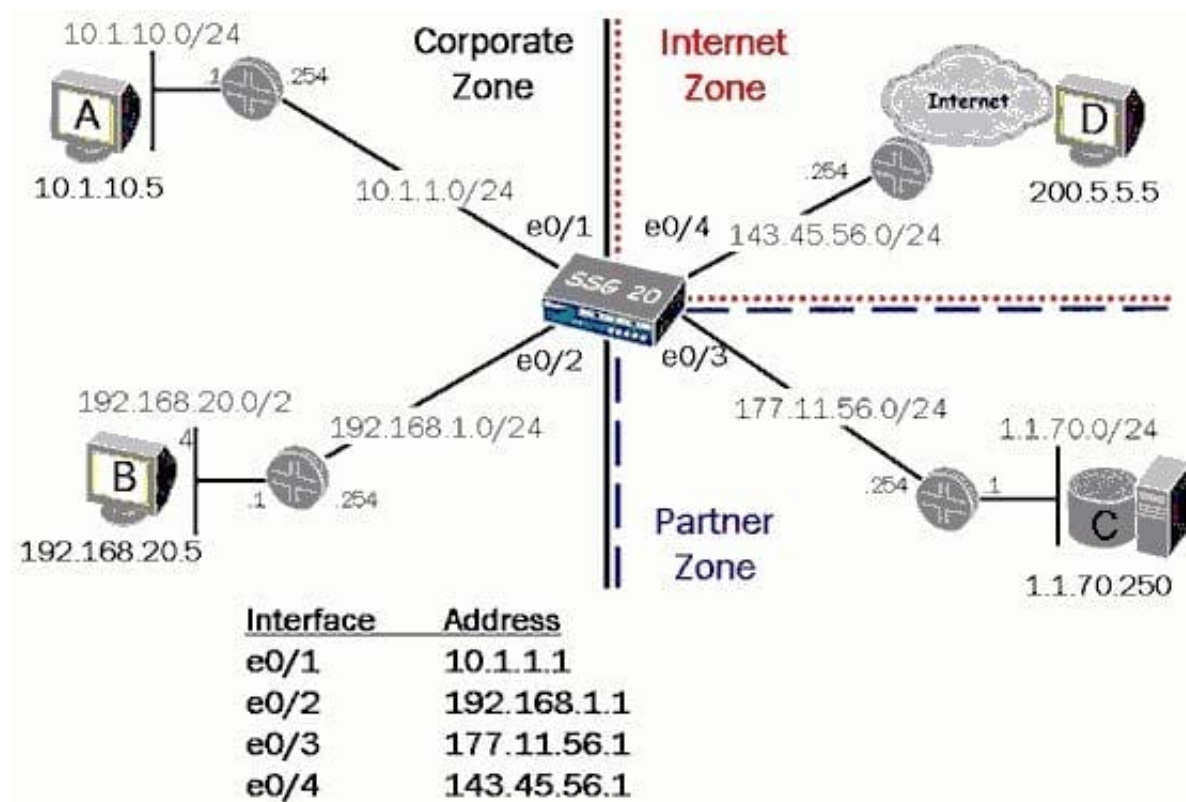

-- Exhibit -Click the Exhibit button.

In the exhibit, you configure NAT-src to translate traffic from the Corporate zone to the Internet zone and do not specify a DIP.

Which address will be used as the outbound source address?

- A. 143.45.56.1
- B. 143.45.56.254
- C. NAT-src requires a DIP
- D. The original source address

Correct Answer: A

**QUESTION 5**

Which three are part of the configuration of an IKE Phase 1 gateway? (Choose three.)

- A. preshare key
- B. security zone



C. negotiation mode

D. outgoing interface

E. Diffie-Hellman group number for PFS

Correct Answer: ACD

[JN0-740 Practice Test](#)

[JN0-740 Study Guide](#)

[JN0-740 Braindumps](#)