



# JN0-740<sup>Q&As</sup>

ACX, Specialist (JNCIS-ACX)

## Pass Juniper JN0-740 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-740.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

-- Exhibit --- Exhibit -Click the Exhibit button to view the exhibit. If A initiates a Web browsing session with D, and the E1 interface of the 208 is in NAT mode, what will be

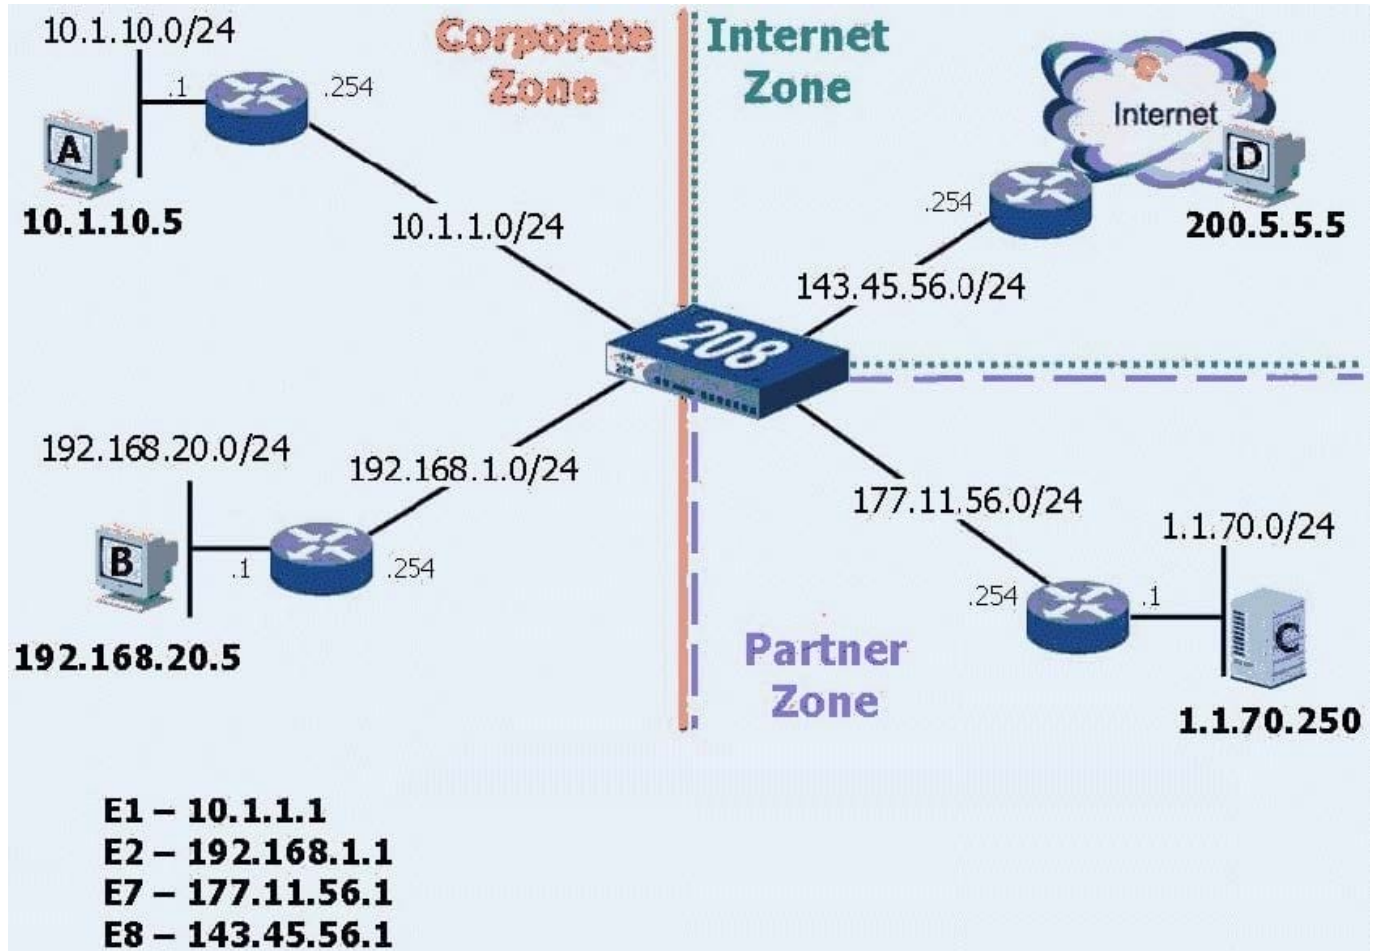

the source address of the packet arriving at host D?

- A. 10.1.1.1
- B. 10.1.10.5
- C. 143.45.56.1

Correct Answer: C

### QUESTION 2

Which two statements are true in regards to a ScreenOS firewall in transparent mode? (Choose two.)

- A. VPNs can terminate to the VLAN1 interface IP address.
- B. Static routes must be configured if multiple virtual routers are going to be used.



- C. It can be installed in a network without the requirement to reconfigure IP addressing schemes.
- D. You must use the console port to manage the device as you cannot manage the device using an Ethernet port.

Correct Answer: AC

---

### QUESTION 3

Which type of NAT is performed when you implement interface-based NAT?

- A. source IP address translation
- B. destination IP address translation
- C. source IP and port address translation
- D. destination IP and port address translation

Correct Answer: C

---

### QUESTION 4

Which three (3) statements are true in regards to a netscreen device in transparent mode?

- A. All interfaces belong to VLAN1 zone for management
- B. VPNs can terminate to the VLAN1 interface IP address
- C. Static routes must be configured if multiple virtual routers are going to be used
- D. It can be installed in a network without the requirement to reconfigure ip addressing schemes
- E. You must use the console port to manage the device as you cannot manage the device via an ethernet port.

Correct Answer: ABD

---

### QUESTION 5

You are looking at the event log of the responding device and it says: Rejected an initial Phase 1 packet from an unrecognized peer gateway What are three likely reasons for the failure? (Choose three.)

- A. The peer ID is misconfigured.
- B. The default gateway is missing.
- C. The preshare keys are mismatched.
- D. The gateway address is misconfigured.
- E. The outgoing interface is misconfigured.



Correct Answer: ADE

[JN0-740 PDF Dumps](#)

[JN0-740 VCE Dumps](#)

[JN0-740 Exam Questions](#)