



NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-181.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

```
Welcome to node setup.
```

```
You can enter the following commands at any time:
```

```
"help" or "?" - if you want to have a question clarified,
```

```
"back" - if you want to change previously answered questions, and
```

```
"exit" or "quit" - if you want to quit the setup wizard.
```

```
Any changes you made before quitting will be saved.
```

```
To accept a default or omit a question, do not enter a value.
```

```
Enter the node management interface port [e0c]:
```

You want to add a FAS2750 HA pair to an existing 6-node cluster.

Referring to the exhibit, which action would you perform to begin adding the node?

- A. Use the back command to begin the Cluster Setup wizard.
- B. Reboot the node and enter maintenance mode and run the Cluster Setup wizard.
- C. Use the node setup wizard and select 0a as the management interface.
- D. Use the exit or quit commands then run the cluster setup command.

Correct Answer: C

Reference: <http://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-sag/System%20administration.pdf> (35)

QUESTION 2

You want to ensure the highest path resilience and performance increase to the storage stack on your FAS8700 cluster. In this scenario, which two types of stack cabling are available to use? (Choose two.)

- A. quadpath HA
- B. mixed-mode
- C. single path
- D. multipath HA

Correct Answer: BD

Reference: <https://www.cisco.com/c/en/us/products/collateral/switches/catalyst-9300-series-switches/white-paper-c11-741468.html>



QUESTION 3

You are installing a new ONTAP 9.7 cluster and attaching the cluster to two separate networks. Your customer has indicated that the same range of client IP addresses are used on both networks and that the networks are never allowed to communicate with each other.

In this scenario, which ONTAP feature must be configured to securely allow all clients to access ONTAP NAS protocols?

- A. BGP
- B. broadcast domains
- C. routing
- D. IPspaces

Correct Answer: B

Reference: <https://www.netapp.com/media/16885-tr-4182.pdf> (9)

QUESTION 4


Before installing an 8-node cluster for a customer, you want to validate compatibility with existing hardware. Which two tools would you use to validate the configuration? (Choose two.)

- A. Active IQ Config Advisor
- B. Interoperability Matrix Tool
- C. Active IQ System Manager
- D. Hardware Universe

Correct Answer: AB

QUESTION 5

Click the Exhibit button.

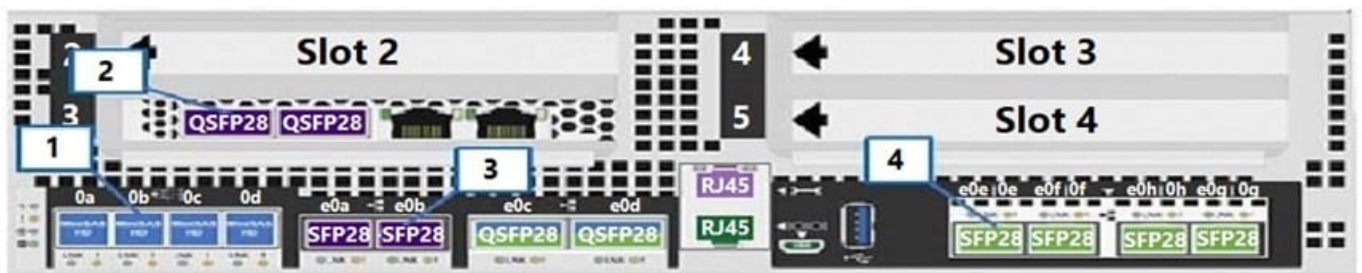

You are installing a 2-node AFF A400 switchless cluster. You have cabled the management network to the e0M port.



NetApp also recommends cabling to a redundant management network switch. Referring to the exhibit, to which port should the redundant management network be cabled?

- A. 3
- B. 2
- C. 1
- D. 4

Correct Answer: D

[Latest NS0-181 Dumps](#)

[NS0-181 PDF Dumps](#)

[NS0-181 Exam Questions](#)