



NS0-505^{Q&As}

NetApp Certified Implementation Engineer – SAN ESeries

Pass NetApp NS0-505 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-505.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What is a best practice recommendation for the automated system monitor? (Choose the best answer.)

- A. It should only run on one client connected to the storage system.
- B. It should be stopped during storage system normal operations.
- C. It should be stopped during a controller firmware upgrade.
- D. It should only be run on Windows server systems.
- E. It should run on all storage manager clients.

Correct Answer: C

QUESTION 2


Which interface is used to view and change the logical structure of a storage system? (Choose the best answer.)

- A. VI
- B. Ldisk
- C. EMW
- D. Disk Manager
- E. AMW

Correct Answer: E

QUESTION 3

Review the diagram.

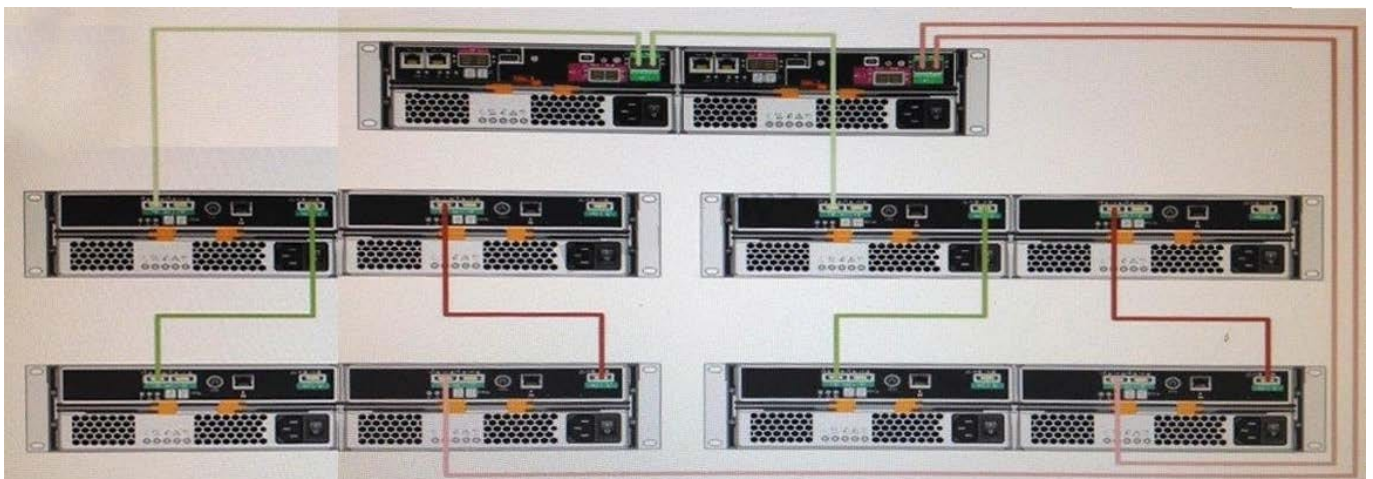



Is this cabling correct or incorrect, and why? (Choose the best answer.)

- A. The cabling is incorrect because each controller goes to only one stack of disk shelves
- B. The cabling is correct for the dual stack cabling method
- C. The cabling is incorrect because it uses the top-down bottom-up cabling method
- D. The cabling is incorrect because the controllers are cabled from the host port.

Correct Answer: B

QUESTION 4

With ALUA support, how does the storage system handle I/Os to the non-preferred path? (Choose the best answer.)

- A. The controller handles them normally, updating both controllers' cache to maintain consistency, which is why ALUA requires cache mirroring to be enabled.
- B. They are accepted but maintained in cache with a special change log, and only processed after 5 minutes when volume ownership may be changed.
- C. They are shipped over to the owning controller to be managed, then returned through the non-preferred path after completion.
- D. They are rejected with a specific SCSI check condition.
- E. The non-owning controller takes ownership of the volume in order to handle them, then restores ownership to the original controller.

Correct Answer: C

QUESTION 5

During normal operation, a failure was detected on an E-Series hardware component. Which tool could be used to determine the location of the failed component and understand the potential recovery actions? (Choose the best answer.)

- A. Recovery Guru
- B. Host Mappings tab
- C. Real-time performance monitor
- D. Unreadable sectors log

Correct Answer: B