



NS0-506^{Q&As}

NetApp Certified Implementation Engineer - SAN, Clustered Data
ONTAP

Pass NetApp NS0-506 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-506.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers




**QUESTION 1**

Click the Exhibit button.

A customer has deployed a new FAS8080EX running clustered Data ONTAP 8.3. Host A is running multipath software that has been properly configured. Also, Host A is currently accessing a LUN using the FC protocol stored on Node A. Switch A, shown in the exhibit, fails.

What will happen next?

Exhibit:

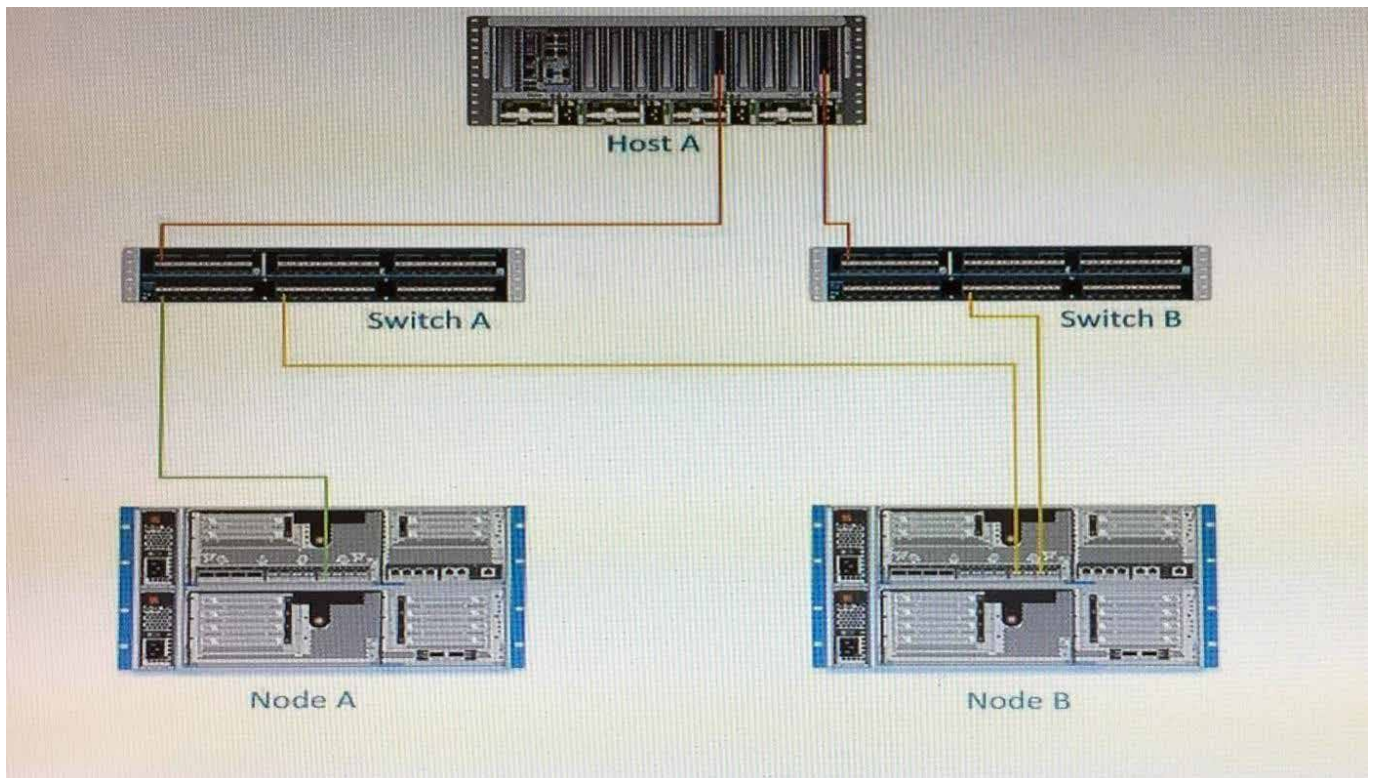

- A. Node A will panic causing a storage failover to Node B.
- B. Host A will lose all access to its LUN.
- C. Host A will continue to access its LUN using Switch B through Node B.
- D. Host A will continue to access its LUN using Switch B through Node A.

Correct Answer: B

QUESTION 2

A company has a 4-node Data ONTAP cluster called cl01. The administrator attempts to create a volume on svm1 and can only select aggregates that are owned by node cl01-01 or cl01-02.



What is causing the problem?

- A. The SVM peering relationship has not been configured with the cl01-03 and cl01-04 HA pair.
- B. The storage virtual machine is not configured to use nodes cl01-03 or cl01-04.
- C. No LIFs have been created on nodes cl01-03 or cl01-04.
- D. Volume creation delegation is not configured to allow use of cl01-03 or cl01-04 owned aggregates.

Correct Answer: B

QUESTION 3

A customer has a host experiencing performance problems with its FC LUNs. The customer has examined the nodes hosting the LUNs, and both the disk and CPU performance are below 50% utilization. The

customer examined the switch ports connected to the storage array, and they are also below 50% utilization.

Which three should the customer verify? (Choose three.)

- A. that the HBA queue depth is set properly
- B. that the host HBA has the correct port settings
- C. that the host Ethernet interfaces are using jumbo frames
- D. that the host is running SnapDrive
- E. that the FC switch ports connected to the host have not exceeded the maximum capacity

Correct Answer: CD

QUESTION 4

In a 4-node cluster, how many LIFs are required on each node to allow a host to use ALUA and have multiple optimized paths to each LUN?

- A. 1
- B. 2
- C. 4
- D. 6

Correct Answer: B

QUESTION 5

After mapping the LUN on the cluster, you are not able to see in on the Windows 2012 host.



```
cl01::>igroup show -instance Vserver Name: svm1 Igroup Name: ig1-win Protocol: iscsi OS Type: Windows Portset Binding Igroup: Igroup UUID: 358338ba-cfd611df-a9ab-123478563412 Initiators: iqn.199105.com.microsoft: host1 (not logged in)
```

Referring to the exhibit, what is the problem?

- A. An administrator is not logged into the host.
- B. The iSCSI target has not been added to the host.
- C. The OS type should be windows_2008.
- D. The OS type should be windows_gpt.

Correct Answer: B

[NS0-506 PDF Dumps](#)

[NS0-506 Practice Test](#)

[NS0-506 Exam Questions](#)