



NS0-509^{Q&As}

NetApp Certified Implementation Engineer - SAN - ONTAP

Pass NetApp NS0-509 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-509.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

An administrator reviews the Upgrade Advisor before performing an upgrade of their ONTAP cluster.


What information is detailed in the report? (Choose two.)

- A. pre-upgrade checks
- B. performance metrics
- C. risk exposures
- D. cluster interconnect checks

Correct Answer: AD

QUESTION 2

Click the Exhibit button.

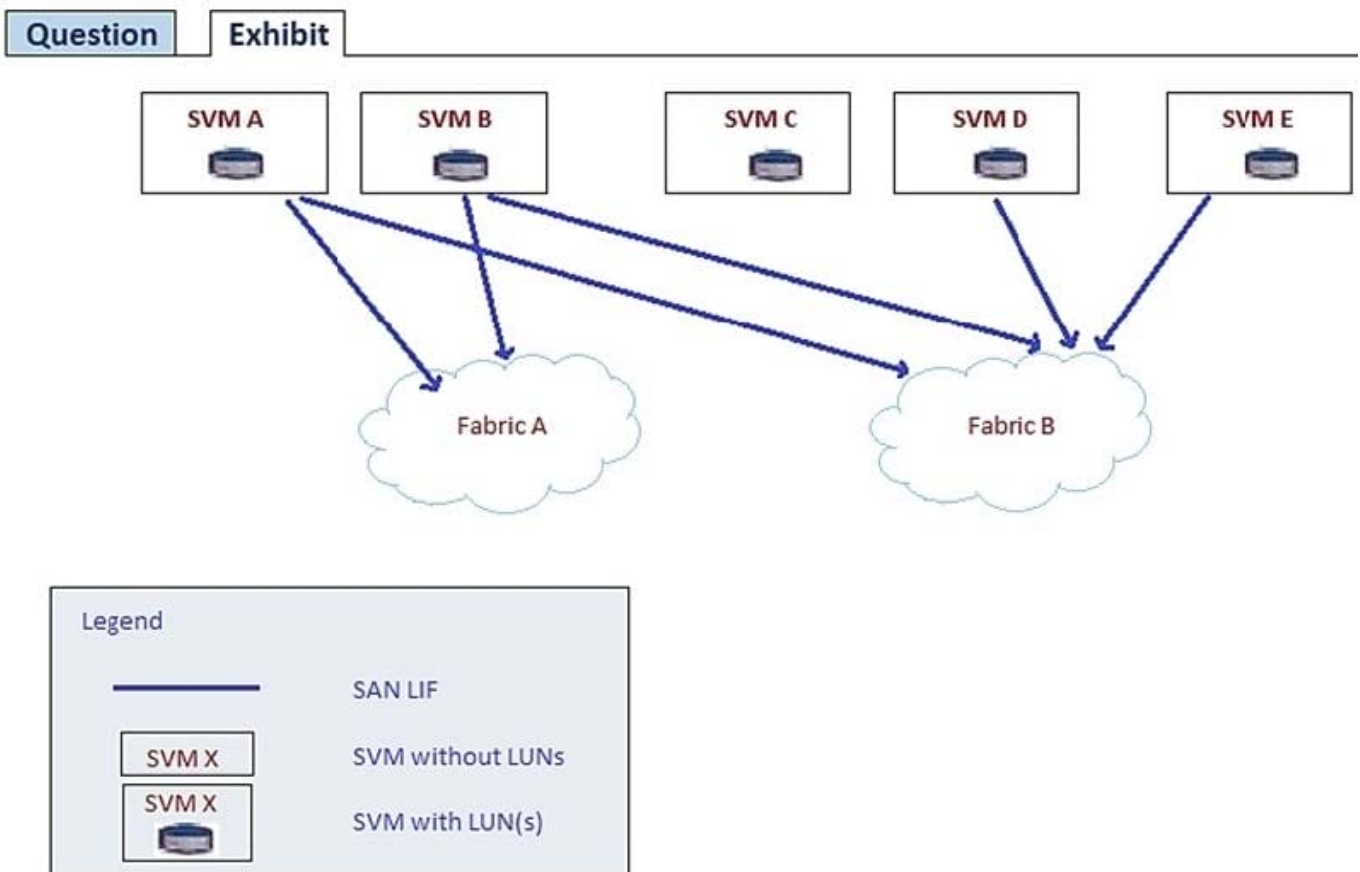

An administrator has an ONTAP cluster with SVMs and LUNs as shown in the exhibit. Hosts attempting to connect to LUNs mapped from SVM "C" are unable to see their LUNs. The hosts are not configured to connect to any other SVM.

Which action should be performed to restore multi-path connectivity to the LUNs in this scenario?

- A. Create LIFs on SVM "C" for host connectivity.



- B. Move the LUN to a different volume within SVM "C".
- C. Move the LUN to SVM "E" to restore connectivity.
- D. Move the LUN to SVM "A" to restore connectivity.

Correct Answer: A

QUESTION 3

You are testing iSCSI LUN failover across a 4-node FAS9000 fabric-attached MetroCluster configuration.

In this scenario, which front end configuration is required for nondisruptive host LUN failover between sites?

- A. an intercluster LIF
- B. a stretched Layer 2 network
- C. IPv6
- D. a stretched VSAN

Correct Answer: A

QUESTION 4

A customer has an FC host that needs to be attached to the NetApp AFF A700 dual controller storage cluster.

To accomplish this task, which three steps should the customer perform? (Choose three.)

- A. Configure the FCP service for the node that has the LUN that is being accessed.
- B. Confirm that the FC HBA driver and firmware is supported according to the Interoperability Matrix Tool (IMT)
- C. Configure portsets to support the availability of multiple paths.
- D. Configure an igroup with the WWPN from the host initiator for LUN access.
- E. Confirm that the switch firmware is supported according to the Interoperability Matrix Tool (IMT).

Correct Answer: CDE

QUESTION 5

You are deploying an 8-node FAS8200 ONTAP cluster and attaching to an existing FC fabric. Which two ONTAP features would be used to restrict or limit the available paths seen from the host? (Choose two.)

- A. port sets
- B. igroup



C. VIAN

D. Selective IUN Map

Correct Answer: AD

[NS0-509 Practice Test](#)

[NS0-509 Exam Questions](#)

[NS0-509 Braindumps](#)