



NS0-515^{Q&As}

NetApp Certified Implementation Engineer - SAN, E-Series

Pass NetApp NS0-515 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-515.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.

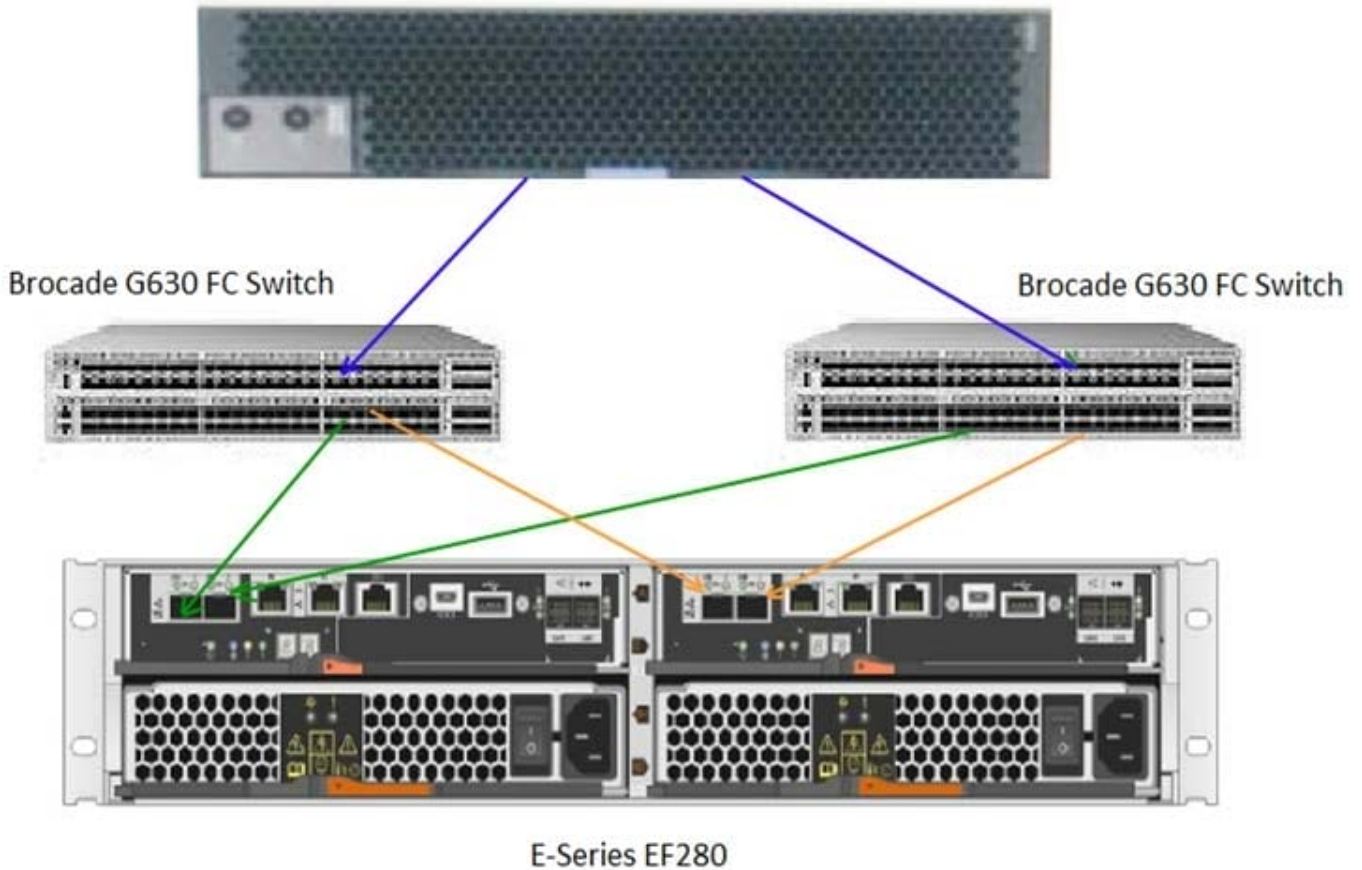

A customer's host is running a Red Hat Enterprise Linux 7.6 server with dm-multipath configured for ALUA and is connected to a single volume on the EF280 system that is shown in the exhibit.


In this scenario, how many active/optimized paths are available to the volume?

- A. 2
- B. 8
- C. 4
- D. 6

Correct Answer: C

QUESTION 2

Click the Exhibit button.

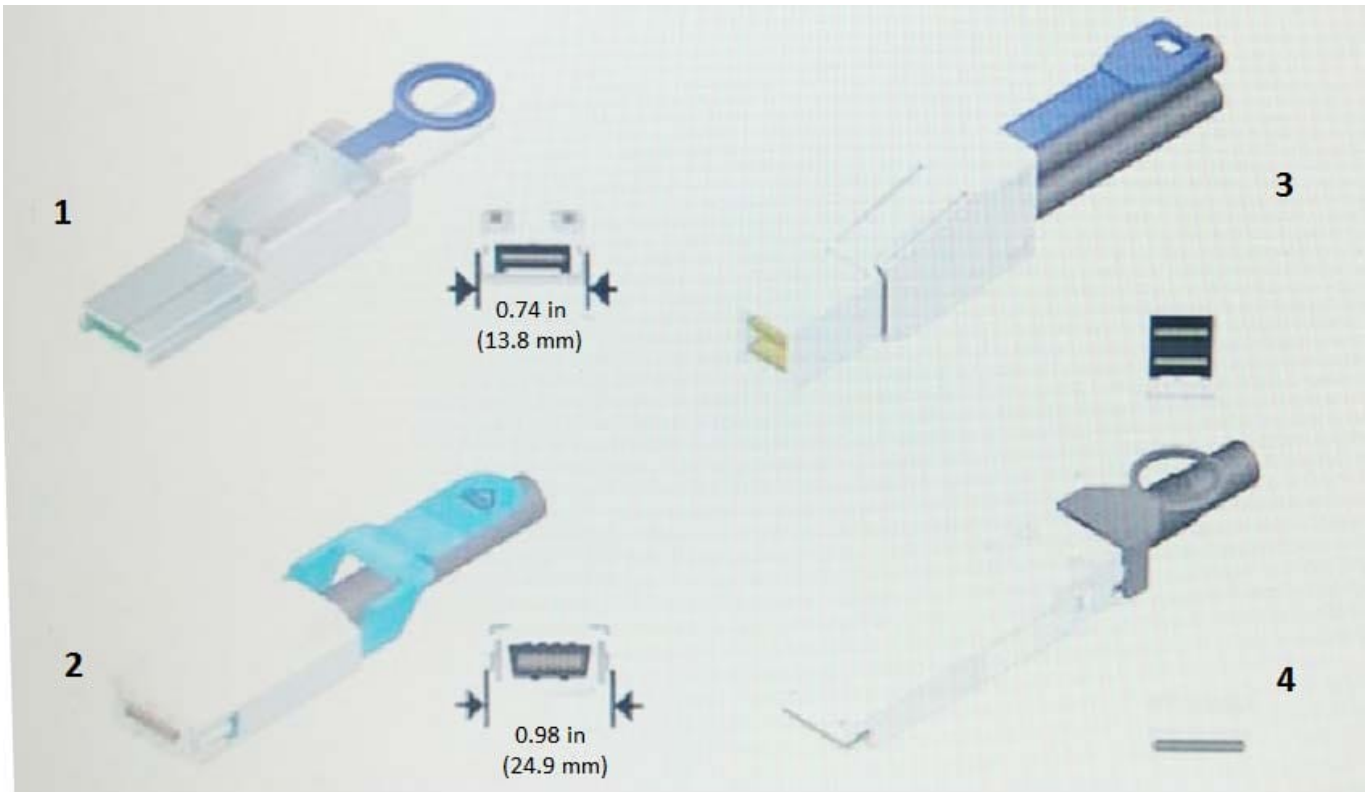

Referring to the exhibit, which cable is an InfiniBand 4X connector?

- A. 3
- B. 1
- C. 2
- D. 4

Correct Answer: C

Reference: http://www.admin-sys.org/IMG/pdf/Hardware_Universe.pdf

QUESTION 3

A company has a duplex E-Series system that is operating in a highly tuned environment. Load distribution between the controllers has been manually set up to achieve a specific distribution based on unique workload characteristics.

In this scenario, to maintain this load distribution over time, which E-Series feature should be disabled?

- A. Storage Load Balancer
- B. Automatic Node Balancer
- C. DNS Load Balancing
- D. Automatic Load Balancing



Correct Answer: D

Reference: <https://mysupport.netapp.com/NOW/public/eseries/sam/index.html#page/GUID-8538272AB802-49D9-9EA2-96C82DAD26A2/GUID-90A829B6-ACEE-41C6-8595-91C7D90554EB.html>

QUESTION 4

What are two base host connectivity selections that are provided by the E2800 controller? (Choose two.)

- A. FC
- B. SAS
- C. IB
- D. iSCSI

Correct Answer: AD

Reference: <https://www.netapp.com/us/media/tr-4725.pdf>

QUESTION 5

The NetApp E-Series system with a 32 Gb FC Host Interface Card (HIC) requires which type of fiber cable to connect to switches or to connect directly to hosts extending up to 100 meters?

- A. OM4
- B. OM3
- C. OM1
- D. OM2

Correct Answer: B

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMLP2773537

[Latest NS0-515 Dumps](#)

[NS0-515 Practice Test](#)

[NS0-515 Exam Questions](#)